

MGG210 | 11.1 L | 232 kVA

MOBILE GASEOUS GENERATOR

EPA Certified: Mobile and Stationary Non-Emergency

GENERAC® | MOBILE

Prime Rating

232 kVA, 185 kW, 60 Hz (NG)

208 kVA, 166 kW, 50 Hz (NG)

Continuous Rating

174 kVA, 139 kW, 60 Hz (NG)

156 kVA, 125 kW, 50 Hz (NG)

Standby Rating

257 kVA, 206 kW, 60 Hz (NG)

175 kVA, 140 kW, 60 Hz (LP)

231 kVA, 185 kW, 50 Hz (NG)

154 kVA, 123 kW, 50 Hz (LP)



Picture shown may not reflect actual configuration.

Codes and Standards

Generac Mobile products are designed to the following standards:



NATM



ISO 8528-5

Power When and Where You Need It

Generac Mobile generators are designed and engineered to power a variety of projects, in the most extreme environments. Gensets are configured to meet customer needs, including choice of containment, cold weather packages, trailer options, and more.

Generac Mobile generators are manufactured to deliver reliable power, when and where you need it.



www.discount-equipment.com

STANDARD FEATURES

ENGINE SYSTEM

- Oil Drain Extension
- Dual Stage Air Cleaner
- Stainless Steel Flexible Exhaust Connection
- Factory Filled Oil and Coolant
- Industrial Exhaust Silencer
- Air Filter Restriction Indicator

FUEL SYSTEM

- Automatic Changeover NG/LP
- Fuel Shutoff Solenoid
- Fuel Line NPT Connection

COOLING SYSTEM

- Close Coolant Recovery System
- UV/Ozone Resistant Hoses
- Factory Installed Radiator
- 50/50 Ethylene Glycol Antifreeze
- Radiator Drain Extension

LUBRICATION SYSTEM

- Full Flow Gear Pump
- Oil Make-Up System with Floating Valve
- Oil Make-Up Tank 60L

ALTERNATOR SYSTEM

- Class H Insulation
- 125 Leads
- 2/3 Pitch
- PMG Excitation System
- Full-Load Capacity Alternator

ELECTRICAL SYSTEM

- Battery Charging Alternator
- Battery Cables
- Battery Tray
- Battery Disconnect Switch
- Rubber Booted Engine Electrical Connections
- Solenoid Activated Starter Motor

ENCLOSURE

- Skid-Mounted in Heavy Gauge Aluminum Sound Attenuated
- High Performance Sound Absorbing Material
- Gasketed Doors
- Upward Facing Discharge Hood (Exhaust)
- Stainless Steel Hinges

GENERATOR SET

- Internal Genset Vibration Isolation
- Wrapped Exhaust Piping
- Bottom (Floor) Power Cable Outlet
- Exhaust Silencer Mounted in Discharge Hood

TRAILER

- Two 7,000 lb (3,175 kg) Axles
- Electric Brakes
- 3 in (76.2 mm) Ring Hitch
- Transportation Tie Downs
- Safety Chains with Spring Loaded Safety Hooks
- Tongue Jack with Footplate – 10,000 lb (4,536 kg)
- Tires: 16 in (40.64 cm), 10-ply, tubeless
- DOT Approved Tail, Side, Brake, and Directional Lights; Recessed Rear Lights
- Illuminated License Plate Holder

WARRANTY

- 1 year / 2,000 hours

CONTROL SYSTEM



IntelliGen NT™ Display

PROGRAM FUNCTIONS

- Genset START/STOP
- Operation Mode MAN/AUTO/TEST
- Manual Open/Close GCB
- Manual Open/Close MCB
- Horn Deactivation
- Fault Reset
- Menu Navigation
- E-Stop Button

CONNECTIONS AND COMMUNICATION

- CAN J1939
- RS485
- Modbus®

FULL SYSTEM STATUS DISPLAY

- Power Output (kW)
- Power Factor Cos
- kWh Total and Last Run
- Active / Reactive / Apparent Power
- All Phase AC Voltage
- All Phase Currents
- Oil Pressure
- Coolant Temperature
- Coolant Level
- Engine Speed
- Battery Voltage
- Mains Present
- Mains Failure
- Genset Voltage Present
- Genset Failure
- Genset Circuit Breaker ON
- Mains Circuit Breaker ON

ALARMS AND WARNINGS

- Oil Pressure
- Coolant Temperature
- Coolant Level
- Low Fuel Pressure
- Engine Over Speed
- Battery Voltage
- Alarms and Warnings Times and Date Stamped
- Snap Shot of Key Operation Parameters during alarms and warnings

RATING DEFINITIONS

Prime: Applies to supplying power to a varying load in lieu of utility for an unlimited amount of running time.

Continuous: The maximum power the generator is capable of delivering continuously while supplying a constant electrical load when operated.

MGG210 | 11.1 L | 232 kVA

MOBILE GASEOUS GENERATOR

EPA Certified: Mobile and Stationary Non-Emergency

GENERAC®

MOBILE

APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

General

Make	PSI
Cylinder #	6
Type	Inline
Displacement: in ³ (L)	677 (11.1)
Bore: in (mm)	4.84 (123)
Stroke: in (mm)	6.1 (155)
Compression Ratio	10.5:1
Intake Method	Turbocharged / Aftercooled
Connecting Rods	Steel Alloy
Cylinder Heads	Cast Iron OHV
Cylinder Liners	Cast Iron Alloy
Ignition	Electronic
Piston Type	Aluminum Alloy
Crankshaft Type	Forged Steel Alloy
Lifter Type	Solid
Intake Valve Material	High-Temp Steel Alloy
Exhaust Valve Material	High-Temp Steel Alloy
Hardened Valve Seats	High-Temp Steel Alloy

Engine Governing

Governor	Electronic
----------	------------

Lubrication System

Oil Pump	Gear
Oil Filter Type	Twin Full Flow
Engine Oil Capacity: qt (L)	26.4 (25.0)

Cooling System

Cooling System Type	Pressurized Closed Recovery
Fan Type	Pusher
Fan Diameter: in (mm)	38.0 (965)

Fuel System

Fuel Type	Natural Gas / Wellhead Gas / Liquid Propane
Carburetor	Down Draft
Secondary Fuel Regulator	EPR
Fuel Shutoff Solenoid	Standard (Dual)
Operating Fuel Pressure: in. H ₂ O (kPa)	7-11 (1.7-2.7)

Engine Electrical System

System Voltage	24V DC
Battery Charger Alternator	Standard
Battery Size	See Battery Index
Battery Voltage	2×12 VDC
Ground Polarity	Negative

ALTERNATOR SPECIFICATIONS

Standard Model	Stamford (UCI274)
Poles	4
Field Type	Revolving
Insulation Class	H
Total Harmonic Distortion (THD)	<5%
Telephone Interference Factor (TIF)	<50

Standard Excitation	PMG
Bearings	Single
Coupling	Direct via Flexible Disc
Number of Sensed Phases	All
Regulation Accuracy (Steady State)	±0.5%

MGG210 | 11.1 L | 232 kVA**MOBILE GASEOUS GENERATOR**

EPA Certified: Mobile and Stationary Non-Emergency

GENERAC®**MOBILE****OPERATING DATA****POWER RATINGS**

	Prime NG	Continuous NG	Standby NG	Standby LP
Three Phase, 400/231 VAC @ PF 0.8 50Hz	208 kVA / 166 kW Amps: 300	156 kVA / 125 kW Amps: 225	231 kVA / 185 kW Amps: 333	154 kVA / 123 kW Amps: 333
Three Phase, 480/277 VAC @ PF 0.8 60Hz	232 kVA / 185 kW Amps: 279	174 kVA / 139 kW Amps: 209	257 kVA / 206 kW Amps: 309	175 kVA / 140 kW Amps: 210

FUEL CONSUMPTION RATES

Load	50 Hz				60 Hz			
	Natural Gas: scfh (m ³ /hr)			Propane: scfh (m ³ /hr)	Natural Gas: scfh (m ³ /hr)			Propane: scfh (m ³ /hr)
	Prime	Continuous	Standby		Prime	Continuous	Standby	
100%	2,011 (57)	1,549 (44)	2,314 (66)	667 (19)	2,274 (64)	1,757 (50)	2,639 (75)	784 (22)
75%	1,549 (44)	1,202 (34)	1,785 (51)	521 (15)	1,757 (50)	1,369 (39)	2,043 (58)	613 (17)
50%	1,087 (31)	855 (24)	1,256 (36)	375 (11)	1,240 (35)	982 (28)	1,447 (41)	443 (13)
25%	624 (18)	509 (14)	727 (21)	229 (6)	723 (20)	594 (17)	850 (24)	272 (8)

COOLING

	50 Hz	60 Hz
Cooling Fan Air Flow cfm (m ³ /min)	15,429 (437)	18,000 (510)
Coolant Flow gal/min (L/min)	69 (260)	82 (310)
Coolant System Capacity gal (L)	23 (105)	23 (105)
Heat Rejection to Coolant BTU/min (kcal/sec)	9,285 (39)	11,071 (47)
Maximum cooling intake air temperature °F (°C)	122 (50)	122 (50)
Maximum Allowable Pressure Cap psi (bar)	14.7 (1)	14.7 (1)

COMBUSTION AIR REQUIREMENT

	50 Hz	60 Hz
Flow at Rated Power scfm/min (m ³ /min)	396 (11)	448 (13)

ENGINE

	50 Hz	60 Hz
Rated Engine Speed: RPM	1,500	1,800
Horespower at Rated RPM (NG PRP) (HP (kW))	241 (180)	272 (203)
BMEP (NG PRP) PSI (kPa)	189 (1,303)	177 (1,220)


EXHAUST

	50 Hz	60 Hz
Exhaust Flow lb/hr (kg/hr)	1,654 (750)	1,869 (848)
Max. Allowable Backpressure inHG (kPa)	3 (10.2)	3 (10.2)
Exhaust Temperature (Pre Catalyst) °F (°C)	1,350 (732)	1,350 (732)

Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions.

Please consult a Generac Mobile Authorized Service Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528, ISO8665, ISO3046, SAE J1228, SAE J1995, and DIN6271 standards.

DIMENSIONS AND WEIGHTS*

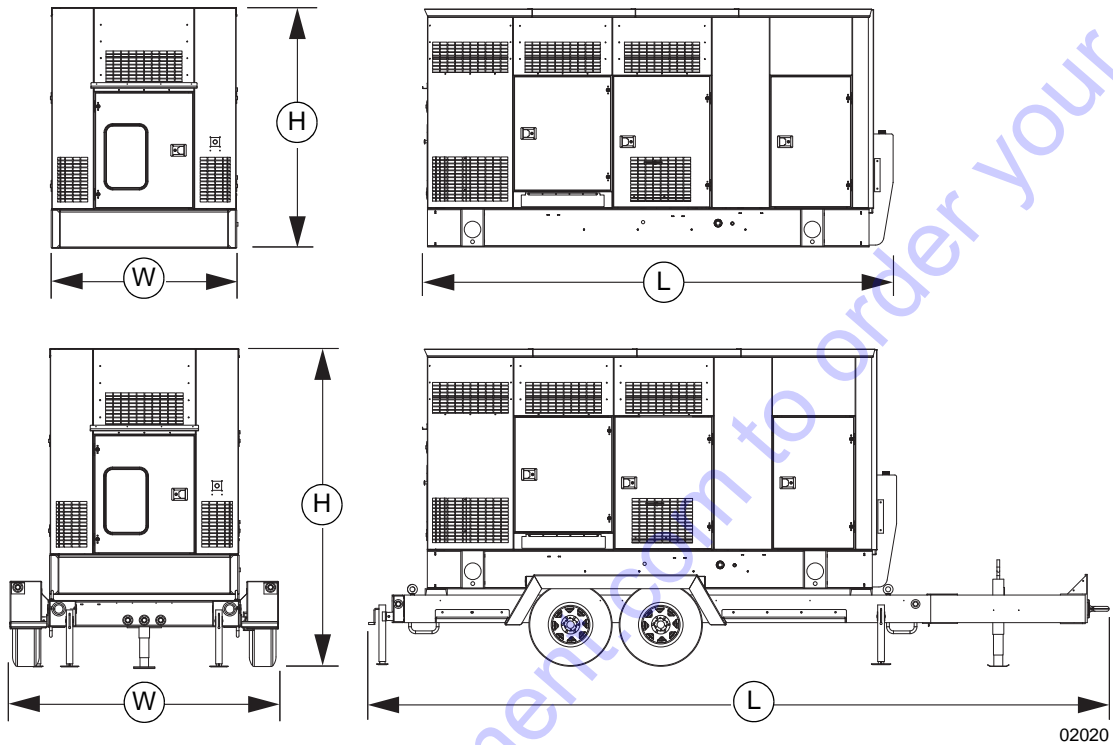

STANDARD ENCLOSURE

Skid Mounted	
Operating Weight: lb (kg)	7,290 (3,307)
L×W×H: in (m)	201 (5.1) × 66 (1.67) × 92 (2.33)
Trailer Mounted	
Operating Weight: lb (kg)	9,890 (4,486)
L×W×H: in (m)	269 (6.83) × 102 (2.59) × 124 (3.15)
Noise Level	78.8 dB(A) @ 23 ft (7 m)

* All measurements are approximate and for estimation purposes only.



www.discount-equipment.com

Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please consult a Generac Mobile Authorized Service Dealer for detailed installation drawings.

TO PURCHASE THIS PRODUCT PLEASE CONTACT US



**Equipment Financing and
Extended Warranties Available**



**Discount-Equipment.com is your online resource for
commercial and industrial quality parts and equipment sales.**

561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar