



WATER TRAILERS

The industry's best water trailers.



[www.Discount-Equipment.com](http://www.Discount-Equipment.com)

**Ideal for job site dust suppression, fire fighting, equipment and vehicle wash-down, mobile irrigation and more, Multiquip's water trailers deliver rugged, reliable performance.**

- **High capacity polypropylene tank** holds 525 gallons of water and includes internal baffles to dampen shifting water loads during transport.
- **Simple water flow controls** combined with reliable Multiquip pumps ensure problem free operation.
- **Smooth highway and job site towing** assured by a dual axle design with ample ground clearance to negotiate rugged terrain.
- **Brake actuator options** included electric and hydraulic surge systems. Height adjustable channel permits multiple hitch options.
- **Made in the U.S.A.** -trailers are DOT compliant and powder coated for durability.

**Quick Fill System** — fill tank from fire hydrants through 2" diameter steel pipe

**Industrial grade valves, solid brass discharge ports and quick-disconnect (cam and groove) couplings** — designed to operate under the most demanding conditions



**Inline water surge chamber** provides relief against pressure spikes

**Reliable performance assured** by a Multiquip centrifugal pump

**Easy selected water delivery options** — two levers direct all manifold water management and infinite flow controls

## Standard Water Trailers

**WT5C** — Includes QP2H centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with hydraulic brakes, 2-5/16" ball hitch, 4-pin wiring connector


**WTE5C** — Includes QP2H centrifugal pump, 2" suction hose and 2" discharge hose; trailer equipped with electric brakes, 2-5/16" ball hitch, 7-pin wiring connector



**Steel bin provides convenient storage for hose and accessories**



**Optional hose reel assembly is available for standard water trailers**

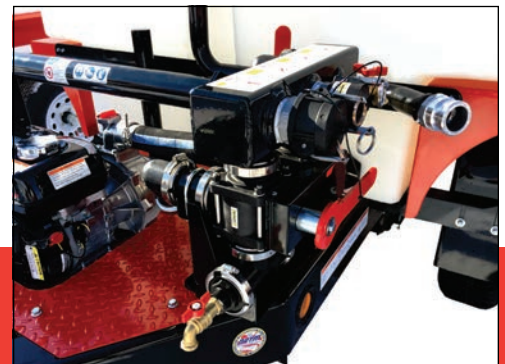

**Single lever control of suction and discharge functions** — multiple ports provide flexible water delivery options and convenient tank filling



**Multiquip High Pressure Water Trailers are best suited for fire control, irrigation applications and applications requiring high discharge pressures.**



**Hose reel assembly** — standard on high pressure water trailers; features 1" x 50', 200 PSI rated hose with fog fire nozzle for variable spray options

**Reel is supported** by industrial bearing for easy deployment and wind up

**Reliable performance assured** by a Multiquip high pressure centrifugal pump


## High Pressure Water Trailers

**WT5HP** — Includes QP205SH centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with hydraulic brakes, 2-5/16" ball hitch, 4-pin wiring connector

**WTE5HP** — Includes QP205SH centrifugal pump, 2" suction hose, reel assembly with 1" discharge hose; trailer equipped with electric brakes, 2-5/16" ball hitch, 7-pin wiring connector



Rear spray bar is capable of producing a cone of water from 8' (gravity flow) to 36' (pressurized flow)

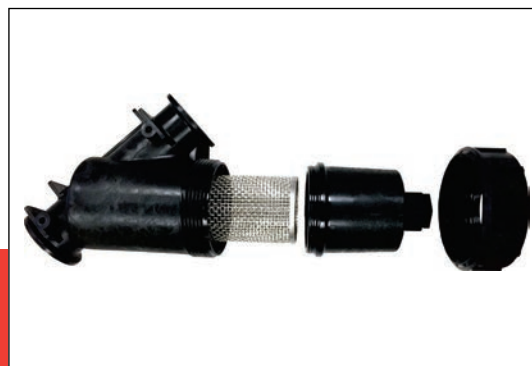

In-line, easy maintenance screen filter system prevents clogging of high pressure pump

# Specifications

	WT5C/WTE5C*	WT5HP/WTE5HP**
<b>Engine</b>		
<b>Model</b>	Honda GX120	Honda GX160
<b>Power - Net Prime HP</b>	3.5	4.8
<b>Fuel Tank Gal.</b>	0.66	0.9
<b>Fuel Consumption GPH</b>	0.18	0.46
<b>Operating Speed RPM</b>	3,600	3,600
<b>Pump</b>		
<b>Make</b>	Multiquip	Multiquip
<b>Model</b>	QP2H (modified)	QP205SH (modified)
<b>Type</b>	2" Centrifugal	2" Centrifugal High Pressure
<b>Max Flow GPM</b>	158	106
<b>Max Head Ft.</b>	115	230
<b>Water Tank</b>		
<b>Type</b>	Industrial Grade — Repairable	
<b>Style</b>	Rotomolded with 6 baffles	
<b>Fill Port</b>	12" vented port	
<b>Material</b>	Polypropylene — 1/4"	
<b>Fill Rate</b>	Five minutes full fill @ full throttle	
<b>Capacity Gal.</b>	525	
<b>Water Operations</b>		
<b>Delivery Methods</b>	Pressurized 1.5" and 2" left / 2" right; Pressurized rear spray nozzles; Three standard garden hose adapters	
<b>Fill Methods</b>	Municipal fire hydrant — QD; 1.5" and 2" Q/D cam and groove; Two standard garden hose adapters	
<b>Trailer and Frame</b>		
<b>Material</b>	Formed steel channel frame	
<b>Number of Axles</b>	2	
<b>Capacity — Axle Rating lb.</b>	3,500	
<b>Tires</b>	ST205/75D 14"	
<b>Certification</b>	DOT	
<b>Brakes</b>	*Hydraulic actuated drum brakes (WT5C); Electric brakes (WTE5C)	**Hydraulic actuated drum brakes (WT5HP); Electric brakes (WTE5HP)
<b>Hitch</b>	2-5/16" Ball Standard	
<b>Jack Ratings lb.</b>	2,000	
<b>Hose Bin</b>	Formed steel enclosure	
<b>Hose Kit</b>	2" x 20 ft. Suction (HSQ220) 2" x 50 ft. Discharge (HDQ250)	2" x 20 ft. Suction (HSQ220) 1" x 50 ft. 200 psi Hose Reel (WT5HR)
<b>Size and Weight</b>		
<b>Dimensions LxWxH in.</b>	146 x 68 x 80	146 x 68 x 80
<b>Trailer Weight DRY lb.</b>	1,530	1,630
<b>Trailer Weight WET lb.</b>	5,835	6,020

## Accessories

### Suction Hose (reinforced PVC) — (Male/Female NPT Thread Couplers)

HS1520	1.5"	20 ft.	90 psi
HS1525	1.5"	25 ft.	90 psi
HS220	2"	20 ft.	75 psi
HS225	2"	25 ft.	75 psi

### Suction Hose (reinforced PVC) — (Male & Female Cam & Groove Lock Couplers)

HSQ1520	1.5"	20 ft.	90 psi
HSQ220	2"	20 ft.	75 psi
HSQ225	2"	25 ft.	75 psi

### Discharge Hose (flat PVC) — NPT thread

HD1550	1.5"	50 ft.	75 psi
HD250	2"	50 ft.	75 psi

### Discharge Hose (flat PVC) — (Male & Female Cam & Groove Lock Couplers)

HDQ1550	1.5"	50 ft.	75 psi
HDQ250	2"	50 ft.	75 psi

### Discharge Hose — 2.5" Female Fire hydrant thread coupler, 2" x 25' Mill Hose and 2" Female Cam & Groove Lock Coupler

HDFNST	25 ft.	200 psi
--------	--------	---------

### Male Cam & Groove Lock Couplers — Male quick-disconnect (Q/D) coupler, Female NPT Thread

A150A	1.5"	Male Q/D to 1.5" Female NPT thread
A200A	2"	Male Q/D to 2" Female NPT thread

### Fire Fog Nozzle — 1.5" diameter, Female NPT thread

FIRENOZ15	1.5"	Adjustable fog nozzle
-----------	------	-----------------------

### Hose Reel Assembly

WT5HR	Includes industrial Reel Assembly, 1" x 50' 200 psi discharge hose, fire fog nozzle, all couplers and hardware to mate with the main manifold water control system
-------	--

### Hitches

29228	2" ball, adjustable
29369	2" pintle, adjustable
EE57033	Bulldog, 2" ball, adjustable
EE56638	Bulldog, 2-5/16" ball, adjustable

Your Multiquip dealer is:



[www.Discount-Equipment.com](http://www.Discount-Equipment.com)

