MULTIQUIP

SlabSaver Concrete Saws





The compact, lightweight, multi-purpose saw... Ideal for commercial green and decorative concrete cutting

- Cuts control joints in green concrete
- Cuts decorative lines in cured concrete
- Powerful gasoline engine permits light slab demolition
- Center blade mount design for straight line cutting
- Saws completely to the edge of walls and columns
- Infinitely adjustable locking depth control with gauge
- Adjustable handle height for operator comfort
- Standard 5/8" blade arbor
- Includes 10" Green Concrete Blade

Features

- Light and portable one-man operation
- 10" blade capacity for a 3½" depth of cut
- Cuts control joints in green concrete and decorative lines in cured concrete
- Ideal for light demolition operations in cured concrete and asphalt
- Center cut accurate straight line sawing
- Saws right to the edge of walls and columns
- Rear pointer drops into cut to ensure straight cutting
- Infinitely adjustable PosiLok blade depth control
- Adjustable handle height for operator comfort
- Tough polyurethane wheels equipped with permanently sealed ball bearings — rides smoothly on all surfaces
- ¾" blade shaft assembly
- Standard 5/8" blade arbor
- 10 ga. jig-welded steel frame will not flex or bend
- Single premium 3VX belt drive
- Vacuum nozzle hook-up on blade guard


Dry Cutting Diamond Blades specially formulated for the SlabSaver Saw

Green Concrete


- 10SWG2 10" x .110" x 5%" Side Winder Premium
- SS10G 10" x .110 x 5%" Segmented Pro Grade


Cured Concrete

- 10SW2 10" x .110 x 5%" Side Winder Premium
- SS10C 10" x .110" x 5%" Segmented Pro Grade



* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

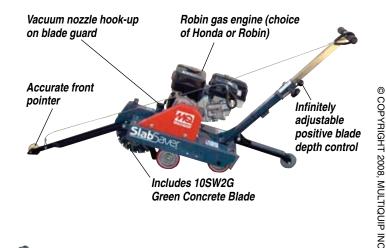

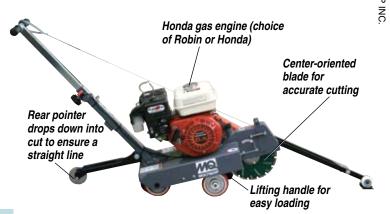

Specifications

FCG1-6H — Slab Saver with 5.5 HP Honda Engine* **FCG1-7R** — Slab Saver with 7.0 HP Robin Engine*

Blade size

Up to 10" diameter with 5%" round arbor Also accepts 5", 7" and 9" V-groove (crack chaser) blades

Engine

7.0HP Robin EX21 with Cyclone pre-cleaner air cleaner; 5.5HP Honda GX200 with Cyclone pre-cleaner air cleaner

Weight

106 lb. (48 kg)

Depth of cut

Up to 31/4" maximum with 10" blade

Dimensions (H x L x W)

Handle retracted: 34" x 41" x 13" Handle extended: 40" x 45" x 13"



MULTIQUIP INC. POST OFFICE BOX 6254 CARSON, CA 90749 310-537-3700 • 800-421-1244

FAX: 310-537-3927 E-MAIL: mq@multiquip.com www.multiquip.com