



TM
BIG
LO
D


High quality
lighting solutions.



www.Discount-Equipment.com

The GB3LED Series is the ideal solution for high quality, diffused lighting with minimal power requirements. GloBug™ LED lighting is utilized for security, emergency response, construction and special event applications.

- **Superior lighting properties** — Color consistency is near perfect, with better color rendering and overall quality
- **Impact resistant LED assembly** — Protects the lamps and is water resistant
- **Long life, low maintenance** — Up to 40,000 hours of operating life per bulb
- **Cooler lamp temperatures** obtained with LED (158 °F) allows for easier handling vs. metal halide (442 °F)
- **3-stage dimming controls** (100W, 200W and 300W)
- **Convenient operation** — Instant start and restarting; no lighting delays
- **Environmentally, economically smart** — LED reduces operating costs and CO2 emissions up to 85%
- **Flexible set-up options** — Choose either tripod or cart-mounted assembly.
- **Self-inflating balloons** — Full inflation in less than 20 seconds
- **Easy transport and storage** — vinyl carrying cases included

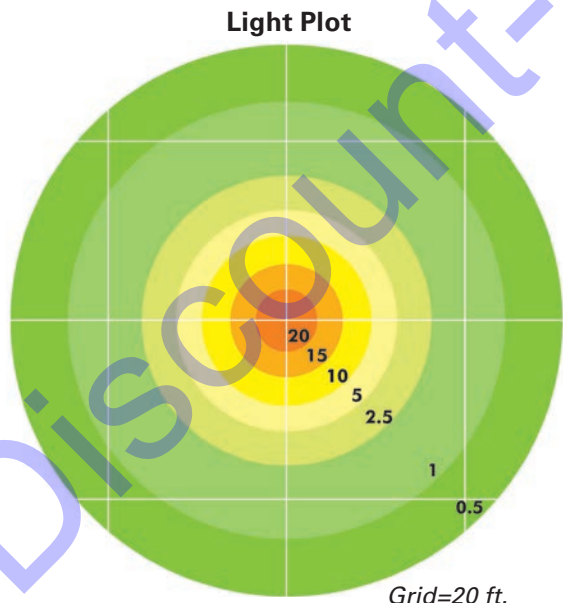

Grid=20 ft.

Footcandle	20	15	10	5	2.5	1.0	0.5
Diameter (ft.)	7	13	19	25	33	49	62

Model	GB3LED	GB3LEDC
Mount Type	Tripod, aluminum, 2-stage air-assisted mast	Cart, zinc plated steel w/ 3-stage air-assisted mast
Max. Height	10'	
Total Weight	27 lb.	82 lb.
Wind Limits	25 MPH	
Lamp Assembly		
Balloon	33.5" x 21"	
Lamp (W)	300W LED	
Lumens	38,000 (High)	
Voltage (V)	115	
Current (A)	2.7A @115V	
Hertz (Hz)	50-60	
Dimmer Switch	100/200/300W	
Min. Generator	350 W	

Also available: **GB3LEDB** — 300W LED Balloon lamp assembly (Total weight: 17.5 lb.)

The GB8LED Series is the ideal lighting solution for high quality, diffused lighting where minimal power requirements are desired. This LED GloBug series best supports applications such as security, emergency response, road and indoor, and equipment mount lighting.

- **Superior lighting properties** — Color consistency is near perfect, with better color rendering and overall quality
- **Impact resistant LED assembly** — Protects the lamps and is water resistant
- **Long life, low maintenance** — Up to 40,000 hours of operating life per bulb
- **Cooler lamp temperatures** obtained with LED (158 °F) allows for easier handling vs. metal halide (442 °F)
- **Optional illuminance settings** — 3-stage dimming controls (400W, 600W and 800W)
- **Convenient operation** — Instant start and restarting; no lighting delays
- **Environmentally, economically smart** — LED reduces operating costs and CO2 emissions up to 85%
- **Flexible set-up options** — Two position tripod stand, two stage (gas assist) vertical mast assembly
- **Self-inflating balloons** — Full inflation in less than 20 seconds
- **Easy transport and storage** — vinyl carrying cases included




GB8LED



GBC8LED
Shown with optional generator

Light Plot

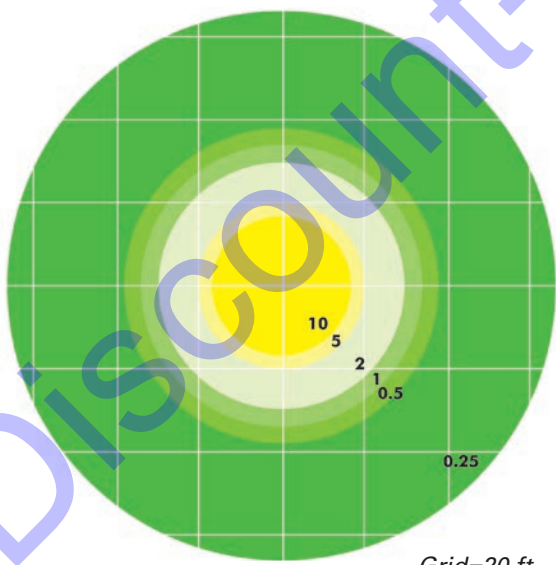

Grid=20 ft.

Footcandle	10	5	2	1.0	0.5	0.25
Diameter (ft.)	34	40	60	68	76	132

Model	GB8LED	GBC8LED
Mount Type	Tripod, aluminum, 3-stage air-assisted mast	Cart, zinc plated steel w/ 3-stage air-assisted mast
Max. Height	13.2'	10.6'
Total Weight	48 lb.	127 lb.
Wind Limits	25 MPH	
Lamp Assembly		
Balloon	47" x 28"	
Lamp (W)	800W LED	
Lumens	110,000 (High)	
Voltage (V)	115	
Current (A)	6.9A @115V	
Hertz (Hz)	50-60	
Dimmer Switch	400/600/800W	
Min. Generator	1200 W	

Also available: **GB8LEDB** — 800W LED Balloon lamp assembly (Total weight: 25 lb.)


The GB12 Series combines high quality, diffused lighting with the value of 400W metal halide lamps. This GloBug series supports security, emergency response, road work, construction, and special events.

- **Metal halide lamp** — single 400 watt lamp for excellent illumination. 3400°K pure white light
- **Minimal power** — only 4 Amps of 115V power
- **Expansive light coverage** — up to 79 feet
- **360° glare-free illumination** with standard fire retardant (UL94 VTM Standard Test) balloon
- **Universally adaptable to all AC power supplies** — accepts 50/60Hz, 100-240V
- **Reflective balloon top** — redirects light towards work area
- **Self-inflating balloons** are easy to install and inflate in less than 20 seconds
- **Three-stage mast** — extends up to 10' 5"
- **Aluminum tripod stand model** provides three outriggers for solid stabilization
- **Optional message strip** available
- **Easy transport and storage** — vinyl carrying cases included



GB12BW

Light Plot

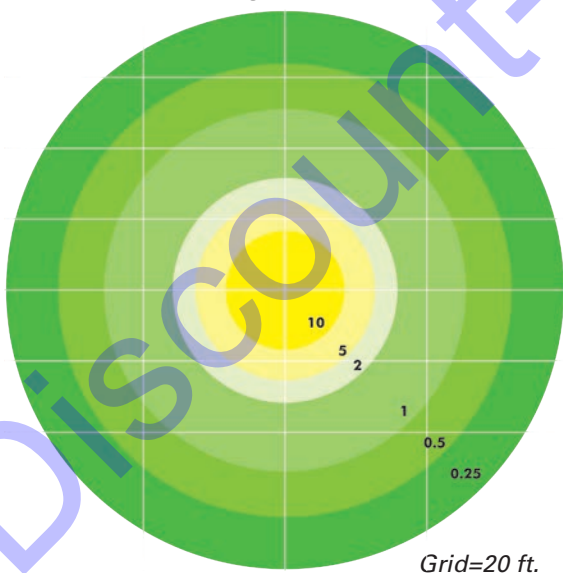

Grid=20 ft.

Footcandle	10	5	2	1	0.5	0.25
Diameter (ft.)	17.1	25.6	34.8	51.2	63.6	78.7

Model GB12BW	
Mount Type	Tripod, aluminum, 2-stage air-assisted mast
Max. Height	10.5'
Total Weight	35 lb.
Wind Limits	25 MPH
Lamp Assembly	
Balloon	33.5" x 21"
Lamp (W)	400W
	Metal Halide
Lumens	34,000
Voltage (V)	115
Current (A)	4A @115V
Hertz (Hz)	50-60
Min. Generator	3450 W


Also available: **GB12BP** — 400W Metal Halide Balloon lamp assembly (Total weight: 17 lb.)

The **GBW Series** is a trusted solution for superior diffused lighting where high lumen output requirements and metal halide value are required. This GloBug series is ideal for security, emergency response, road and indoor, and equipment mount lighting.

- **Metal Halide lamp** — single 1000 watt lamp for excellent illumination. 3400°K pure white light
- **Low power requirements** — only 9.3 Amps of 115V power
- **Excellent coverage up to 150 feet**
- **360° glare-free illumination** with standard fire retardant (UL94 VTM Standard Test) balloon
- **Universally adaptable to all AC power supplies** — accepts 50/60Hz, 100-240V
- **Reflective balloon top** — redirects light towards work area
- **Self-inflating balloons** are easy to install and inflate in less than 20 seconds
- **Three-stage mast** - extends up to 13' 2"
- **Pentapod stand model** provides five outriggers for solid stabilization
- **Optional message strip** available
- **Easy transport and storage** — vinyl carrying cases included



Light Plot

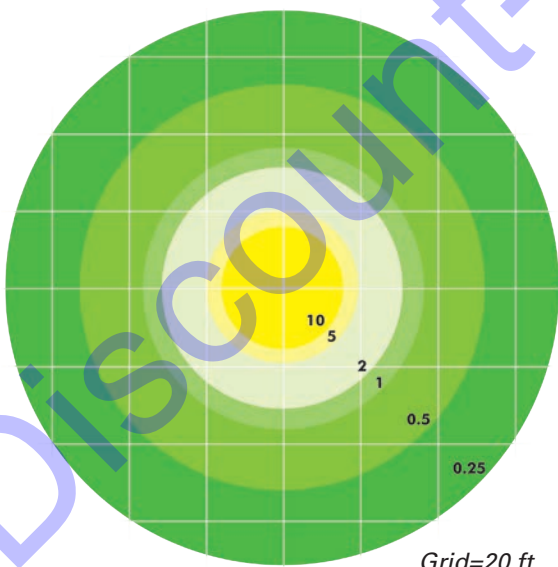

Footcandle	10	5	2	1	0.5	0.25
Diameter (ft.)	32	40	64	74	106	146

Model	GBW	GBC
Mount Type	Tripod, aluminum, 3-stage air-assisted mast	Cart, zinc plated steel w/ 3-stage air-assisted mast
Max. Height	13.2'	10.6'
Total Weight	52 lb.	127 lb.
Wind Limits	25 MPH	
Lamp Assembly		
Balloon	47" x 28"	
Lamp (W)	1000W Metal Halide	
Lumens	107,000	
Voltage (V)	115	
Current (A)	9.3A @115V	
Hertz (Hz)	50-60	
Min. Generator	1200 W	

Also available: **GBP** — 1000W Metal Halide Balloon lamp assembly (Total weight: 23 lb.)

The GB2000 easily connects to the electrical and ballast systems of most conventional light towers to provide exceptional glare-free lighting.

- **2000 Watt 360° glare-free** diffused lighting system
- **Seamlessly works** with the existing light tower electrical systems*
- **Integrated fan** inside lamp housing instantly inflates balloon
- **Quick disconnect** electrical fittings
- **Excellent light coverage** of over 240 feet
- **Quick, easy set-up** and transportation
- **Meets DOT diffused lighting specifications**
- **Comes with T-Bar mounting bracket** and all necessary hardware
- **Balloon is washable and repairable**




Two conventional lamps may still be operated with the GB2000.



GB2000
Shown on traditional light tower

Light Plot

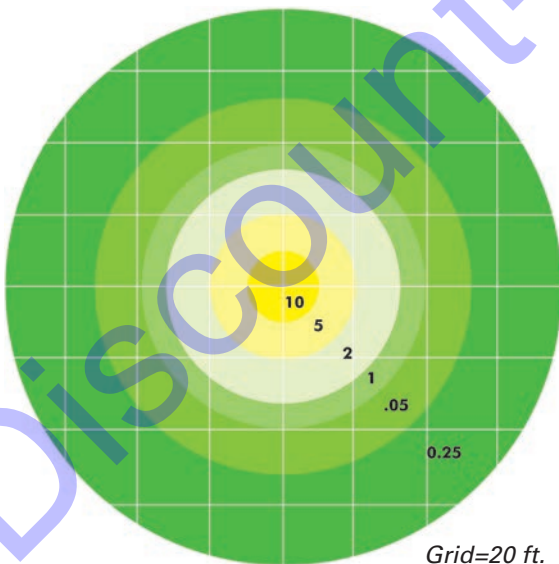

Grid=20 ft.

Footcandle	10	5	2	1	0.5	0.25
Diameter (ft.)	20	62	93	120	154	232

Model GB2000	
Assembly includes:	
(1) 2000W Balloon Lamp Assembly	
(1) Universal Bracket Assembly	
(1) Electrical Junction Box and connection hardware	
Total Weight	31 lb.
Wind Limits	40 MPH
Lamp Assembly	
Balloon (inflated)	34.5" x 35.5" x 40.5"
Lamp (W)	2 x 1000W Metal Halide
Lumens	220,000
Voltage (V)	238-268
Current (A)	8.2A @ 240V
Hertz (Hz)	50-60
Min. Generator	3200 W

**Designed for Multiquip Light Towers. Contact technical support for assistance with other brands.*

The GB4000 provides powerful glare-free lighting. The system provides diffused illuminance that eliminates shadows, improves operator job awareness, and curtails light glare to on-coming automotive traffic.

- **4000 Watt 360° glare-free** diffused lighting system
- **Seamlessly works** with the existing light tower electrical systems*
- **Integrated balloon fan** inside lamp housing instantly inflates balloon
- **Quick disconnect** electrical fittings
- **Excellent light coverage** of over 300 feet
- **Quick, easy set-up** and transportation
- **Meets DOT diffused lighting specifications**
- **Includes T-Bar mounting bracket** and all necessary hardware
- **Balloon is washable and repairable**




The GB4000 easily connects to the electrical and ballast systems of the light tower for seamless operation.



GB4000
Shown on generator

Light Plot

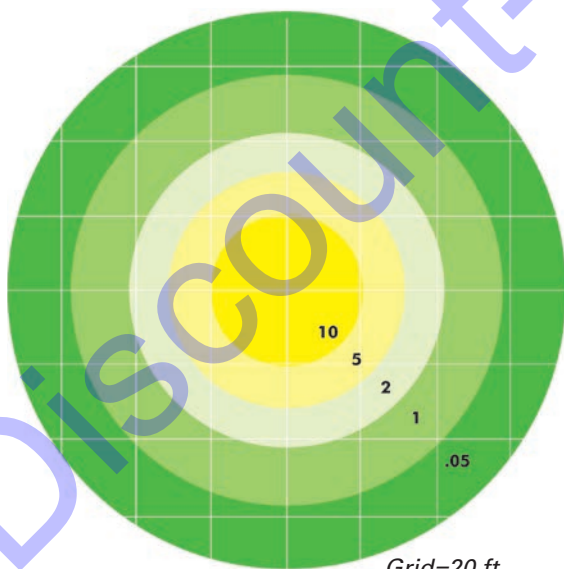

Grid=20 ft.

Footcandle	10	5	2	1	0.5
Diameter (ft.)	60	93	122	165	230

Model GB4000	
Assembly includes: (1) 4000W Balloon Lamp Assembly (1) Universal Bracket Assembly (1) Electrical Junction Box and connection hardware	
Total Weight	41 lb.
Wind Limits	40 MPH
Lamp Assembly	
Balloon (inflated)	55.1" x 47.2"
Lamp (W)	4 x 1000W Metal Halide
Lumens	428,000
Voltage (V)	50-60
Current (A)	37.2A @ 240V
Hertz (Hz)	50-60
Min. Generator	4200 W

**Designed for Multiquip Light Towers. Contact technical support for assistance with other brands.*



GloBug

4-Spot Metal Halide 1600W

The original GloBug 4-Spot with a three-stage mast and four 400 watt lamps produces 1600 watts of illumination. Its rugged construction and power lighting will provide years of performance.


Each lamp can be independently oriented to best illuminate the work areas. The compact, mobile design provides flexibility for deployment in applications as varied as construction areas, industrial sites, special events and first response teams.

- **Powerful metal halide lamps** and small footprint make it ideal for use in confined or busy areas
- **Durable lamp housings** feature aluminum construction for longevity
- **Flexible power options** permit connection to local 120 volt power or a portable generator
- **Mechanically assisted 3-stage mast** extends to a maximum height of 13.7 feet
- **Rugged steerable cart** utilizes zinc-plated steel to prevent corrosion and large pneumatic tires permit easy on-site mobility
- **Versatile platform** allows secure mounting of most pipe-frame generators and includes center mount lifting bale
- **Stability assured** through mechanical foot brake and dual locking outriggers
- **Folds to tight 3.5" x 3' x 5.6' footprint** for transport and storage



GB43SC
Shown with optional generator

Light Plot

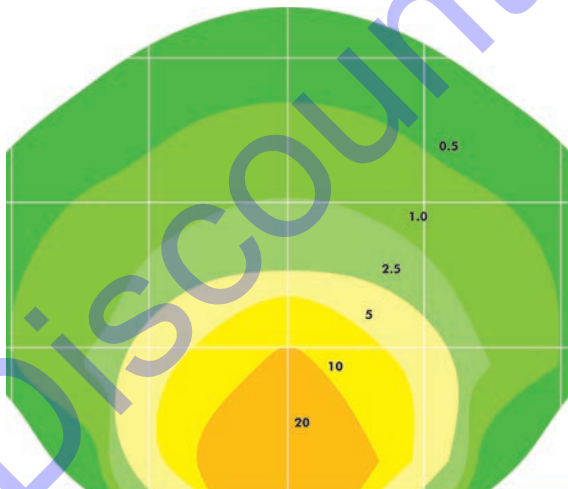


Grid=30 ft.

Footcandle	20	10	5	2	1	0.5
Distance (ft.)	30.2	40.7	45.9	60.9	80.6	100.2


Model GB43SC	
Mount Type	Cart, zinc plated steel w/ 3-stage air-assisted mast
Max. Height	13.7"
Total Weight	364 lbs
Wind Limits	40 MPH
Lamp Assembly	
Lamp Type	Metal Spot Light
Lamp	4 x 400W Metal Halide
Lumens	136,000
Voltage (V)	120
Current (A)	16 @120V
Hertz (Hz)	60
Plug Type	NEMA 5-20P
Min. Generator	2,500 Watts

This ultimate GloBug 4-Spot — with a four-stage mast and four 300 watt LED lamps — produces 1,200 watts of illumination. It combines powerful and efficient lighting with a quick and easy deployment. It's ideal for many applications.

- **Highly efficient LED lamps** produce clean, clear light and deliver 40,000 hour service life
- **Immediate lighting** as lamps strike instantly with no waiting required at start-up or during re-strike
- **Durable lamp housings** feature aluminum and poly construction along with shatter-resistant lenses
- **Flexible power options** permit connection to local 120 volt power or portable generator
- **Mechanically assisted 4-stage mast** extends to a maximum height of 17 feet
- **Rugged steerable cart** utilizes zinc-plated steel to prevent corrosion and large puncture-proof tires permit easy on-site mobility
- **Versatile platform** allows secure mounting of most pipe-frame generators and includes center mount lifting bale
- **Stability assured** through mechanical foot brake and dual locking outriggers
- **Folds to tight 3.6' x 3.5' x 6.8' footprint** for transport and storage

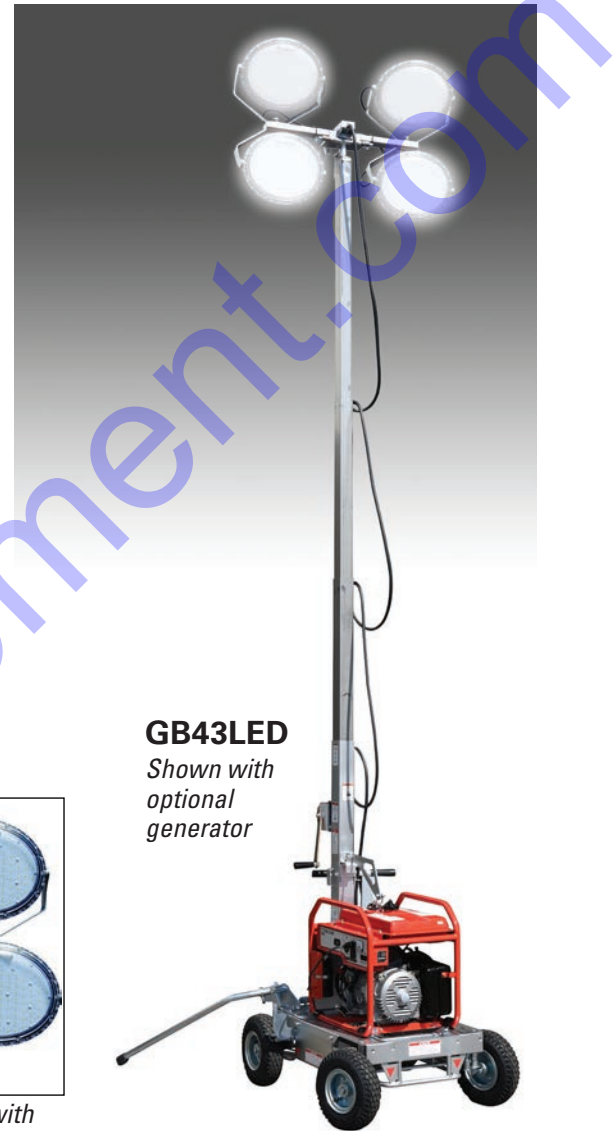


GB43LED
Shown with optional generator

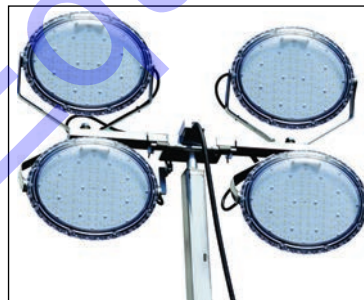

Each lamp is designed with 96 industrial LED chips.

Light Plot

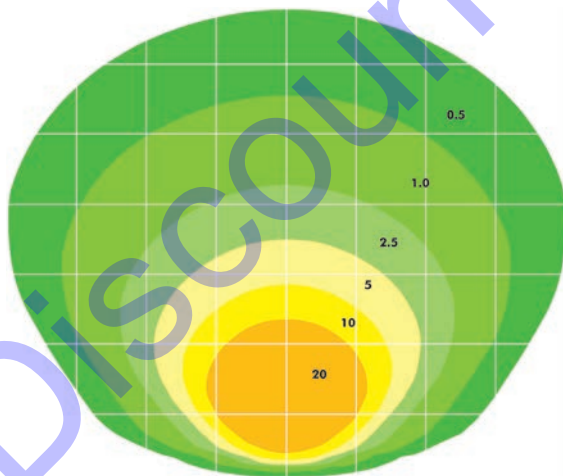

Grid=30 ft.

Footcandle	20	10	5	2	1	0.5
Distance (ft.)	31.6	41.7	53.6	68.4	93.1	117.4

Model GB43LED	
Mount Type	Cart, zinc plated steel w/ 3-stage air-assisted mast
Max. Height	17"
Total Weight	316 lbs
Wind Limits	40 MPH
Lamp Assembly	
Lamp Type	Metal Spot Light
Lamp	4 x 300W LED
Lumens	152,000
Voltage (V)	120
Current (A)	11 @120V
Hertz (Hz)	60
Plug Type	NEMA 5-15P
Min. Generator	2,500 Watts

GBX8B




Unit draws 7.2A @ 120V

Model: GBX8B	
Engine	
Engine	K80i
EPA/Tier	Tier 4 Final
Horsepower	3.5 HP
Rated Speed-RPM	4,500
Engine Protection	Low Oil
Sound Level dB @ 23 ft	63.3 db(A)
Fuel Tank	
Fuel Capacity	3 gal.
Running time/HR full load	18 hrs.
Cart Data	
Material Construction	Steel (Zinc Coating)
Foot Brake	Yes
Generator	
Wattage KW Continuous	1.6 kW
Voltage / Amp	120V / 13.3A
Regulation ±	5%
Mast Assembly	
Mast Height (MAX)	3 Sections - 91"
Construction	Aluminum (Anodized)
Air Assist Shock System	Yes
Lights - Projection	
Lamps	LED - 800W
Type Lighting	Balloon
Lumens	110,000
Kelvin Rating	5,700
Dimmer Switch	Yes
Number of LED Chips	402
Dimensions	
L x W x H (deployed)	45.2" x 21.6" x 124"
L x W x H (stowed)	32.2" x 21.6" x 71.6"
Weight DRY (lbs)	174 lb.
Wind Limits	45 MPH

The GBX8B is a compact, self-powered diffused 800W LED Balloon Bag lighting system. This highly mobile unit is the perfect choice for residential, industrial, and commercial jobsite applications where glare-free lighting is desired.

- 1.6kW Inverter Generator
- Powerful 4-cycle, 3.5HP gas engine (EPA/CARB)
- 3 Gallon fuel tank — 18 HRS run time (full load)
- ECO Mode for fuel conservation and noise abatement
- 120V 13.3A external DUPLEX receptacle
- 800W No-Glare LED Balloon Lamp w/dimmer
- Lamps provide 3-stage dimmer control
- Overall compact design: 32" X 22" footprint

Light Plot

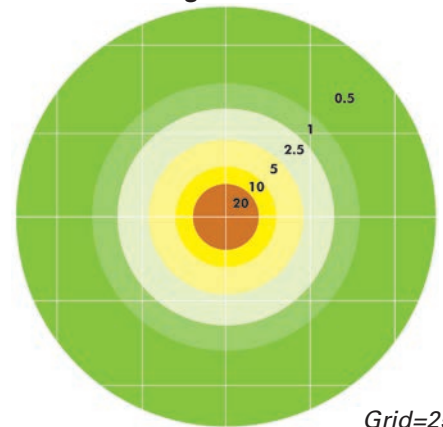

Grid=25 ft.

Footcandle	20	10	5	2.5	1	0.5
Distance (ft.)	20	30	46	64	79	125


Model: GBX4S	
Engine	
Engine	K80i
EPA/Tier	Tier 4 Final
Horsepower	3.5 HP
Rated Speed-RPM	4,500
Engine Protection	Low Oil
Sound Level dB @ 23 ft	63.3 db(A)
Fuel Tank	
Fuel Capacity	3 gal.
Running time/HR full load	25.5 hrs.
Cart Data	
Material Construction	Steel (Zinc Coating)
Foot Brake	Yes
Generator	
Wattage KW Continuous	1.6 kW
Voltage / Amp	120V / 13.3A
Regulation ±	5%
Mast Assembly	
Mast Height (MAX)	3 Sections - 114" - 360° Rotation
Construction	Aluminum (Anodized)
Air Assist Shock System	Yes
Lights - Projection	
Lamps	(2) LED - 200W
Dimmer Switch	3 Position
Lumens	56,000 @ 400W
Kelvin Rating	5,700
Number of LED Chips	106 x (2)
Dimensions	
L x W x H (deployed)	47" x 21.6" x 128.3"
L x W x H (stowed)	32.4" x 21.6" x 64.3"
Weight DRY (lbs)	164.5 lb.
Wind Limits	45 MPH



GBX4S

Unit draws
3.4A @ 120V

Light Plot

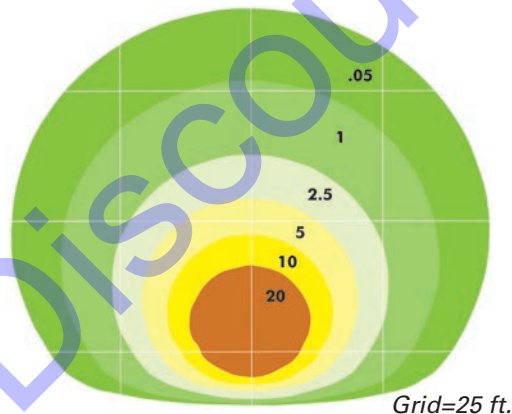


Footcandle	20	10	5	2.5	1	0.5
Distance (ft.)	20	29	37	46	61	75

The GBX4S is a compact, self-powered, 2-Spot 400W LED cart-mounted lighting solution. The unit supports a multitude of residential, industrial, and commercial job site applications by providing exceptional low-glare illumination.

- **1.6kW Inverter Generator**
- **Powerful 4-cycle, 3.5HP (2.6kW) gasoline engine** EPA/CARB Certified
- **3 Gallon fuel tank** — 25.5 HRS run time (full load)
- **ECO Mode** for fuel conservation and noise abatement
- **120V 13.3A** external DUPLEX receptacle
- **(2) X 200W Low Glare LED Lamps**
- **Lamps provide 3-stage dimmer control**
- **Overall compact design:** 32" X 22" footprint


Superior mobile lighting - mounted on a compact mobile trailer, the **GBX12SK** provides brilliant LED lighting and offers over 200 HRS of operating time on a tank of fuel.

- **Trusted KUBOTA diesel engine** - EPA/CARB certified.
- **High efficiency LED lamps** - produce bright, clear 168,000 lumen projection lighting.
- **LED longevity and safety** - lamps provide 40,000 hours of operational life and permit immediate strike/re-strike capability.
- **Aerospace mast design** - Anodized aluminum 5-section telescopic mast provides strength and aggressive corrosion resistance.
- **Industrial trailer assembly** - rugged, compact layout that meets all DOT/NHSTA trailer and cabinet requirements.

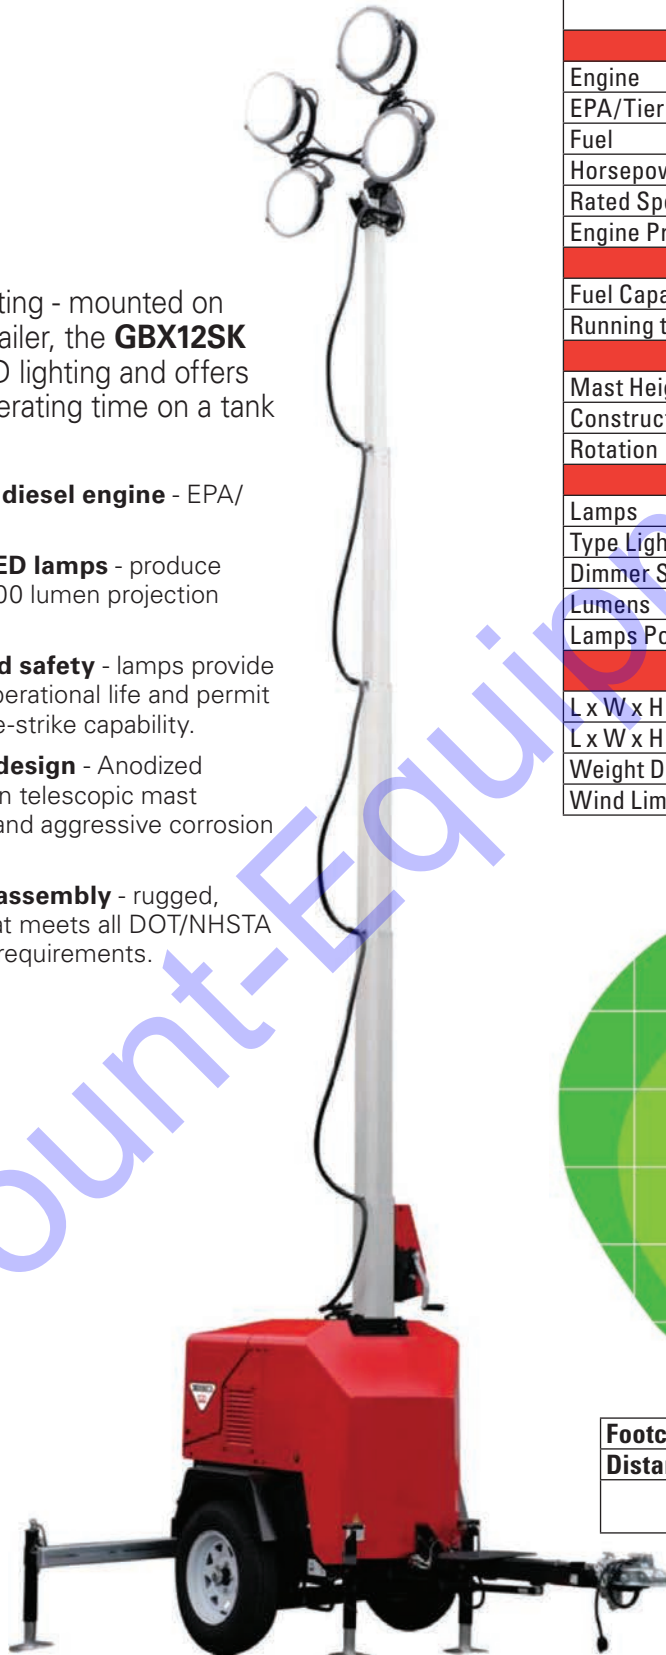

Model: GBX12SK	
Engine	
Engine	KUBOTA - Diesel
EPA/Tier	Tier 4 Final
Fuel	Diesel
Horsepower	6.1 HP
Rated Speed-RPM	1,800
Engine Protection	High Temp/Low Oil
Fuel Tank	
Fuel Capacity	45 gal.
Running time/Lamp only	200 hrs.
Mast Assembly	
Mast Height (MAX)	23 ft.
Construction	Anodized Aluminum
Rotation	359°
Lights - Diffused	
Lamps	4 x 300W lamps
Type Lighting	Projection
Dimmer Switch	No
Lumens	168,000
Lamps Power Rating	1,200W/11A
Dimensions	
L x W x H (deployed)	93.3" x 96.5" x 309"
L x W x H (stowed)	58.3" x 47.2" x 90.5"
Weight DRY (lbs)	1,288
Wind Limits	45 MPH

Light Plot

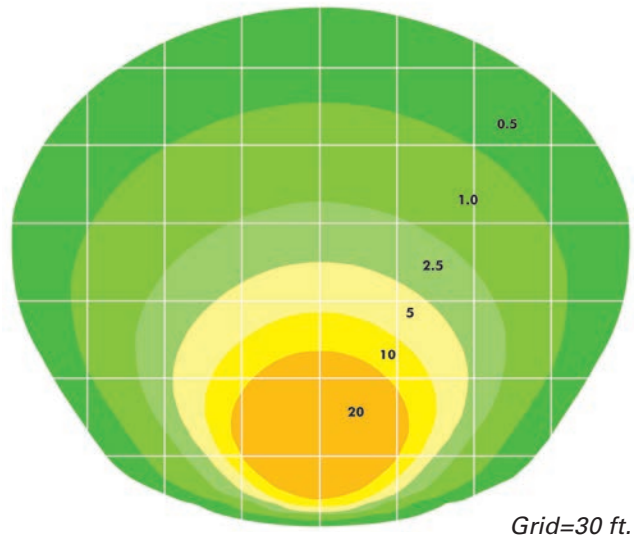

Grid=30 ft.

Footcandle	20	10	5	2.5	1	0.5
Distance (ft.)	31.6	41.7	53.6	68.4	93.1	117.4


GBX24BK LED Light Tower — An industry first - powerful 2400W LED diffused balloon bag lighting system mounted on a mobile trailer that delivers 399,000 lumen of light over a 225' circle.

- **Trusted KUBOTA diesel engine** - EPA/ CARB certified.
- **Powerful Diffused LED Balloon** - produces brilliant, shadow-free 399,000 lumen projection lighting.
- **LED longevity and safety** - lamps provide 40,000 hours of operational life and permit immediate strike/re-strike capability.
- **Aerospace mast design** - Anodized aluminum 5-section telescopic mast provides strength and aggressive corrosion resistance.
- **Industrial trailer assembly** - rugged, compact layout that meets all DOT/NHSTA trailer and cabinet requirements.







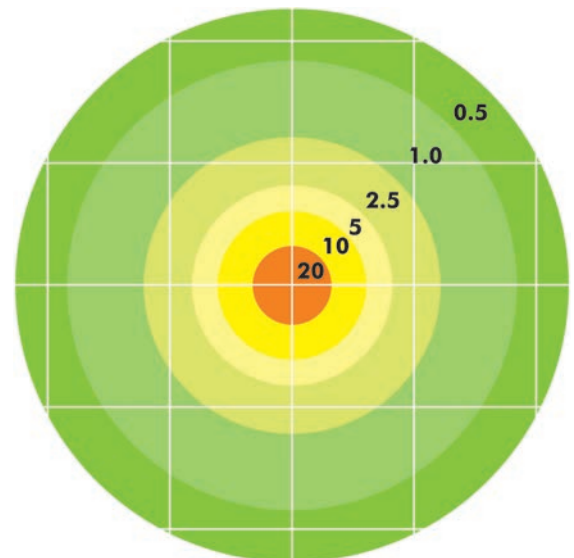

Model: GBX24BK	
Engine	
Engine	KUBOTA - Diesel
EPA/Tier	Tier 4 Final
Fuel	Diesel
Horsepower	6.1 HP
Rated Speed-RPM	1,800
Engine Protection	High Temp/Low Oil
Fuel Tank	
Fuel Capacity	45 gal.
Running time/Lamp only	140 hrs.
Mast Assembly	
Mast Height (MAX)	23 ft.
Construction	Anodized Aluminum
Rotation	359°
Lights - Diffused	
Lamps	LED Balloon
Type Lighting	Diffused Balloon
Dimmer Switch	Yes
Lumens	399,000
Lamps Power Rating	2,400W/22A
Dimensions	
L x W x H (deployed)	93.3" x 96.5" x 329"
L x W x H (stowed)	63.6" x 47.2" x 90.5"
Weight DRY (lbs)	1,278
Wind Limits	45 MPH

Light Plot



Grid=50 ft.

Footcandle	20	10	5	2.5	1	0.5
Distance (ft.)	32	61	82	121	184	226
						



GB12BS

Glare-free lighting provides safety benefits for work crews and vehicle traffic. Complies with DOT requirements for proper job site illumination.

Model	GB12BS	GBS
Lamp	400W Metal Halide	1000W Metal Halide
Lumens	34,000	107,000
Voltage (V)	120	120
Current (A)	4A @ 120V	9.3A @ 120V
Hertz (Hz)	50-60	50-60
Balloon	33.5" x 21"	47" x 28"
Mast	(1) Straight pole; (1) 90° offset pole; (2) universal mounting clamps	(1) Straight pole; (1) 90° offset pole; (2) universal mounting clamps
Total height	6.1'	6.5'
Total weight	35 lbs.	40 lbs.
Wind Limits	25 MPH	26 MPH
Min. Generator	450 Watts	1,200 Watts




GBS

GloBug equipment mount models provide versatile and complete lighting solutions. Each model includes the balloon light assembly, universal mounting clamps and mounting hardware.



The Mounting Plate accessory attaches to flat surfaces and is ideal for installation on construction equipment and trailers. The GBMP supports all E-ballast GloBug balloon lighting units.



GBMP attaches to the sides of equipment and supports all E-ballast GloBug balloon lighting units.



The Hitch Mount bolts over 2" x 2" draw bars (Draw bar length must accommodate 5" of length). This attachment is perfect for utility and job-site vehicles. The GBHM supports all E-ballast GloBug balloon lighting units.



GBHM Hitch Mount

Model	GBMP	GBHM
Description	Mounting Plate Kit: Includes plate, 2 poles and hardware	Hitch Mount Kit: Includes adapter, 2 poles and hardware

Note: Supports all current production LED and Metal Halide GloBug balloon units

Multiquip offers a wide selection of balloon bags to support your GloBug applications. A multiple array of colored and reflective design options are available for the various metal halide and LED models.

Replacement Balloon Bags		
GloBug Model	Balloon Part No.	Description
GB3LED GB3LEDB GB3LEDC	GBB85D	Standard Replacement, no reflector
	GBB85DR	With reflector top
	A100136600	With 180° side reflector
	GBBAL400B	Blue material, no reflector
	GBBAL400R	Red material, no reflector
GB8LED GB8LEDB GBC8LED	A100108400	Standard Replacement, no reflector
	GBBAL115D	With reflector top
	A100136700	With 180° side reflector
	GBBAL800B	Blue material, no reflector
	GBBAL800R	Red material, no reflector
	GBBAL800Y	Yellow material, no reflector
	GB36	36" cylindrical DOT design
	GB48	48" cylindrical DOT design
GB12BW GB12BP GB12BS	GBB85DR	Standard Replacement, w/reflector top
	GBB85D	No reflector
	A100136600	With 180° side reflector
	GBBAL400B	Blue material, no reflector
	GBBAL400R	Red material, no reflector
GBW GBP GBC GBS	GBBAL115D	Standard Replacement, w/reflector top
	GBBAL120	No reflector
	A100136700	With 180° side reflector
	GBBAL120B	Blue material, no reflector
	GBBAL120R	Red material, no reflector
	GBBAL120Y	Yellow material, no reflector
	GBBALYR	Yellow material, with reflector top
	GBBAL120P	Pink material, no reflector
	GB36	36" cylindrical DOT design
	GB48	48" cylindrical DOT design
GB2000	A100085103	Standard Replacement, w/reflector top
GB4000	A100098700	Standard Replacement, w/reflector top
	A100107800	No reflector
GBX8B	A100152300	Standard Replacement, no reflector

Model	Lamp Type	Style	Power	Lumens	Voltage	Amps	Stand Type	Min. Gen (W)	Max. Wind Speed
GB12BW	Metal Halide	Balloon	400W	34,000	115	4	Tripod	1000	25
GB12BP	Metal Halide	Balloon	400W	34,000	115	4	N/A	1000	25
GB12BS	Metal Halide	Balloon	400W	34,000	115	4	90° Mount	1000	25
GBW	Metal Halide	Balloon	1000W	107,000	115	9.3	Pentapod	1200	25
GBP	Metal Halide	Balloon	1000W	107,000	115	9.3	N/A	1200	25
GBC	Metal Halide	Balloon	1000W	107,000	115	9.3	Cart	1200	25
GBS	Metal Halide	Balloon	1000W	107,000	115	9.3	90° Mount	1200	25
GB3LED	LED	Balloon	300W	38,000	115	2.7	Tripod	350	25
GB3LEDB	LED	Balloon	300W	38,000	115	2.7	N/A	350	25
GB3LEDC	LED	Balloon	300W	38,000	115	2.7	Cart	350	25
GB8LED	LED	Balloon	800W	110,000	115	6.9	Pentapod	1200	25
GB8LEDB	LED	Balloon	800W	110,000	115	6.9	N/A	1200	25
GBC8LED	LED	Balloon	800W	110,000	115	6.9	Cart	1200	25
GB2000	Metal Halide	Balloon	2000W	220,000	240	8.2	Note 1	3200	40
GB4000	Metal Halide	Balloon	4000W	428,000	240	37.2	Note 1	4200	40
GB43SC	Metal Halide	Projection	1600W	136,000	120	16	Cart	2500	40
GB43LED	LED	Projection	1200W	152,000	120	11	Cart	2500	40
GBX4S	LED	Projection	400W	56,000	120	3.4	Cart	N/A	45
GBX8B	LED	Balloon	800W	110,000	120	7.2	Cart	N/A	45
GBX12SK	LED	Projection	1200W	168,000	120	25	Trailer	3000	45
GBX24BK	LED	Balloon	2400W	399,000	120	22	Trailer	3000	45

Note 1: Unit attaches to selected mobile light towers.

Your Multiquip dealer is:



www.Discount-Equipment.com

