

Standard Configurations

- Overload Sensor and Alarm
- Tilt/Slope Sensors and Alarm
- Self-closing/Self-catching Gate
- Higher Platform Rails (Foldable)
- Solid Non-marking Tires
- Swing-out Component Trays
- Descent Protection and Alarm
- Flashing Beacons (Both Sides)
- Pothole Protectors
- Universal Control Box
- Quick Disconnect for Control Box
- Foot Pedal Extended Platform
- Proportional Control
- Lanyard Points
- Manual Brake Release
- Emergency Descent
- Horn and Hour Meter
- Full Height Drive
- Intelligent Diagnostic System
- AC Platform Power (GFCI)
- Charging Protection System
- Wind Rating Stickers
- LED Battery Charging Indicator

ANSI A92.20 Slab Scissor Lifts

LGMG

LGMG North America Inc.

ELECTRIC MOTOR DRIVE


AS1932E Scissor Lift (Indoor/Outdoor)

- Optimized to deliver longer-lasting performance for jobs that are inside and outside
- Battery-powered with zero emissions means it is environmentally friendly and great for indoor use
- A superior electronic control system that allows for better braking abilities on long downhills
- Improved steering mechanism reduces tire wear during turning



Product Specifications AS1932E

Platform Capacity	510 lbs
Platform Occupants (Indoor/Outdoor)	2/1
Platform Height	19'
Machine Length	6' 1"
Machine Width	2' 8"
Machine Height (Rails Up)	7'
Machine Height (Rails Down)	6'
Platform Extension	3'
Deck Extension Capacity	265 lbs
Drive Speed (Lowered)	2.5 Mph
Drive Speed (Elevated)	0.5 Mph
Lift Time	16 Secs
Lower Time	28 Secs
Gradeability	25%
Max Slope/Tilt	1.5°/3°
Amp Hours	(4) 6V x 225Ah
Maximum Ground Bearing Pressure	150 PSI
Tire Size	13" x 4"
Ground Clearance - Center	2.25"
Machine Weight	3,571 lbs

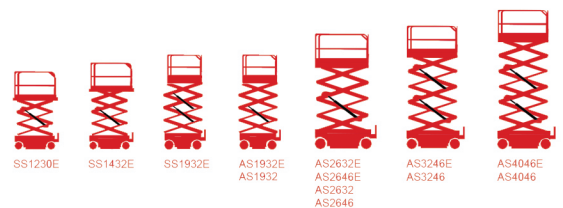

ANSI A92.20 Compliant



LGMG North America Inc.

Address: 1445 Sheffler Drive, Chambersburg PA 17201

Email: sales@lmgna.com

Local Sales Contact: