



## Standard Configurations

- Overload Sensor and Alarm
- Tilt/Slope Sensors and Alarm
- Self-closing/Self-catching Gate
- Higher Platform Rails (Foldable)
- Solid Non-marking Tires
- Swing-out Component Trays
- Descent Protection and Alarm
- Flashing Beacons (Both Sides)
- Pothole Protectors
- Indoor/Outdoor Mode Control Box
- Quick Disconnect for Control Box
- Foot Pedal Extended Platform
- Proportional Control
- Lanyard Points
- Manual Brake Release
- Emergency Descent
- Horn and Hour Meter
- Full Height Drive
- Intelligent Diagnostic System
- AC Platform Power (GFCI)
- Charging Protection System
- Wind Rating Stickers
- LED Battery Charging Indicator

# ANSI A92.20 Slab Scissor Lifts

**Discount  
Equipment**

[www.Discount-Equipment.com](http://www.Discount-Equipment.com)

**LGME**  
LGMG North America Inc.

# ELECTRIC A/C DRIVE

## AS4650E Scissor Lift (Indoor/Outdoor)

- Optimized to deliver longer-lasting performance for jobs that are inside and outside
- Battery-powered with zero emissions means it is environmentally friendly and great for indoor use
- A superior electronic control system that allows for better braking abilities on long downhill
- Improved steering mechanism reduces tire wear during turning




### Product Specifications AS4650E

Platform Capacity	705 lbs
Platform Occupants (Indoor/Outdoor)	2/1
Platform Height(Indoor/Outdoor)	45' 4"/26' 2"
Machine Length	9' 3"
Machine Width	4' 4"
Machine Height (Rails Up)	9'
Machine Height (Rails Down)	7'
Platform Extension	3'
Deck Extension Capacity	265 lbs
Drive Speed (Lowered)	1.9 Mph
Drive Speed (Elevated)	0.5 Mph
Lift Time	85 Secs
Lower Time	65 Secs
Gradeability	25%
Max Slope/Tilt	1.5°/3°
Amp Hours	24V DC 300Ah
Drive Mode	4x2
Tire Size	15" x 5"
Ground Clearance - Center	4"
Machine Weight	7,870 lbs

ANSI A92.20/EN280 Compliant

Specifications subject to change without notice. Photos used are for promotional purposes only. 2020 V1.

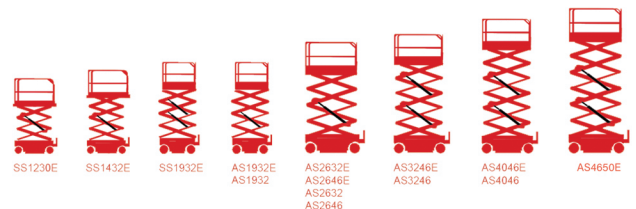

LGMG North America Inc.



[www.Discount-Equipment.com](http://www.Discount-Equipment.com)