

**Genie**<sup>®</sup>  
A TEREX COMPANY



# SELF-PROPELLED SCISSORS

## CUSTOMERS FIRST. ALWAYS.

### PARTNERING FOR SUCCESS

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships founded on the idea of partnership. Because you, our customer, are at the center of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

### PROVIDING SUPERIOR VALUE

Our commitment doesn't end with the sale. Our dedicated service teams are available 24 hours a day, 365 days a year to provide support when you need it most. Our extensive parts network ships most parts within 24 hours, too. Simply put, we're always working to help maximize your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



**Genie**  
A TEREX COMPANY

### SETTING THE STANDARD

Genie manufactures some of the most advanced, highest-valued lift equipment in the industry. Genie distinctive blue lifts set the standard for performance and durability — not to mention support from people who understand your business.



# ELEVATED EFFICIENCY

## WITH INDUSTRY-LEADING DESIGN

The ever-expanding line of Genie® electric and rough terrain scissor lifts offers you unmatched performance and versatility — boosting work site productivity. Genie® electric scissor lifts are exceptionally mobile, letting you maneuver in tight worksites. Plus, they're productive and efficient, allowing maximum workspace for larger loads and more workers. Genie® rough terrain scissor lifts also enhance productivity by providing exceptional traction, speed and gradeability. They're the perfect machines for big outdoor jobs where platform workspace is critical.

**Genie® scissor lifts provide productivity-enhancing speed and gradeability to help you make the most of the equipment on your jobsite.**



# MAXIMIZE YOUR PRODUCTIVITY

Genie® self-propelled electric scissor lifts are the industry solution for increasing worksite productivity. Ideal for maneuvering in tight spaces, they're excellent for indoor and outdoor construction, maintenance and installation applications with firm, level surfaces. Characterized by low noise levels, these lifts provide excellent capacity and maximum platform workspace.

## EASY SERVICE

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Swing-out battery box and power module trays allow easy access to engine components for convenient service.



## SIMPLE ACCESS

These compact units easily pass through standard single or double doors. Solid non-marking tires are standard (except GS-2668 DC and GS-3268 DC models).



**The Genie® slab scissors family has been completely updated with features that enhance reliability, serviceability and performance.**

## SELF-PROPELLED SCISSORS | ELECTRIC



### CONVENIENT OPERATION

Low-emission electric scissors deliver a quiet, convenient method for operation in sound-sensitive environments like office buildings, shopping malls, hotels, schools and more. Gain access to even loftier jobs with the GS™-3232, which provides working heights up to 38 ft (11.75 m) while fitting into spaces as narrow as 32 in (81 cm) wide.



### OUTDOOR FUNCTIONALITY

Electric self-propelled scissors offer outdoor functionality on firm, level surfaces, providing accessibility for a wide variety of applications.



### COMPACT MANEUVERABILITY

All models have front-wheel drive and most models feature zero inside turning radius for excellent maneuverability in tight spaces like congested construction sites, elevators and narrow aisles.

### ELECTRIC MODELS AVAILABLE

SINGLE-DOOR ACCESS	<a href="#">GS™-1530</a>	<a href="#">GS™-1930</a>	<a href="#">GS™-2032</a>	<a href="#">GS™-2632</a>	<a href="#">GS™-3232</a>
DOUBLE-DOOR ACCESS	<a href="#">GS™-2046</a>	<a href="#">GS™-2646</a>	<a href="#">GS™-3246</a>	<a href="#">GS™-2668 DC</a>	<a href="#">GS™-3268 DC</a>

# OPTIONS

## FOR ELECTRIC SELF-PROPELLED SCISSORS

GS™-1530

GS™-1930

GS™-2032

GS™-2632

GS™-3232

GS™-2046

GS™-2646

GS™-3246

GS™-2668 DC

GS™-3268 DC

PLATFORM										
PLATFORM SWING GATE HALF HEIGHT	○	○	○		○					
FOLDING GUARDRAILS WITH PLATFORM HALF HEIGHT SWING GATE (STANDARD CE)	○	○	○	S	S					
FOLDING GUARDRAILS WITH PLATFORM FULL HEIGHT SWING GATE (STANDARD CE)						S	S	S	S	S
AIR LINE TO PLATFORM	○	○	○	○	○	○	○	○	○	○
PIPE CRADLE PAIR						○	○	○	○	○
PLATFORM WORK LIGHT(S)	○	○	○	○	○	○	○	○	○	○
WARNING										
DUAL FLASHING BEACONS	○	○	○	○	○	○	○	○	○	○
MOTION ALARM	○	○	○	○	○	○	○	○	○	○
AUTOMOTIVE-STYLE HORN	○	○	○	○	○	○	○	○	S	S
ELECTRONIC HORN	S	S	S	S	S	S	S	S		
STABILITY										
AUTOMATIC LEVELING HYDRAULIC OUTRIGGERS					S					
POWER										
POWER INVERTER (110 V/60 HZ/800 W)	○	○	○	○	○	○	○	○	○	○
POWER INVERTER (230 V/50 HZ/800 W)	○		○	○	○	○	○	○	○	○
MAINTENANCE-FREE BATTERY	○	○	○	○	○	○	○	○		
EE RATING	○	○	○	○	○	○	○	○		
TIRES										
SOLID NON-MARKING TIRES	S	S	S	S	S	S	S	S	S	○

○ = OPTION

S = STANDARD



### FOLDING GUARDRAILS

Neatly folding guardrails make it easy to maneuver through doorways, into elevators and throughout other height-restricted areas.



**DUAL FLASHING BEACONS**

Orange flashing lights warn workers when lift is moving or in operation.

**NON-MARKING TIRES**

These hard rubber non-marking tires prevent scuffing floors or picking up debris that could otherwise damage a floor.



**SELF-LEVELING  
OUTRIGGERS**

The Genie GS™-3232 slab scissers model helps maximize uptime with a compact, maneuverable design and automatic hydraulic, non-marking, self-leveling outriggers that level the lift on uneven ground — up to 5° side to side — before elevating the platform.

# BOOST YOUR PERFORMANCE AND POWER

Genie® rough terrain scissor lifts are tough, construction-oriented four-wheel drive machines with positive traction control — ideal for increasing productivity in demanding outdoor worksites. Competitive lift speed and large platforms maximize efficiency with the handling and capacity to get to the jobsite and finish working faster.



## SPEED AND TRACTION

Genie® RT scissor lifts are able to traverse through uneven or rough terrain environments more efficiently. They are equipped with four-wheel drive and positive traction control for traction when you need it most. They offer up to 50% gradeability when driving on slopes.


## FOLD-DOWN CONVENIENCE

Heavy duty fold-down guardrails and a removable rear platform railing allow increased accessibility for loading and unloading the machine in trucks, containers and other situations with limited overhead space. These features also allow easy access through doorways.



**Genie® RT models are built for the rental industry and built to last. They're designed to stand up to the rigors of frequent use in diverse worksite conditions.**



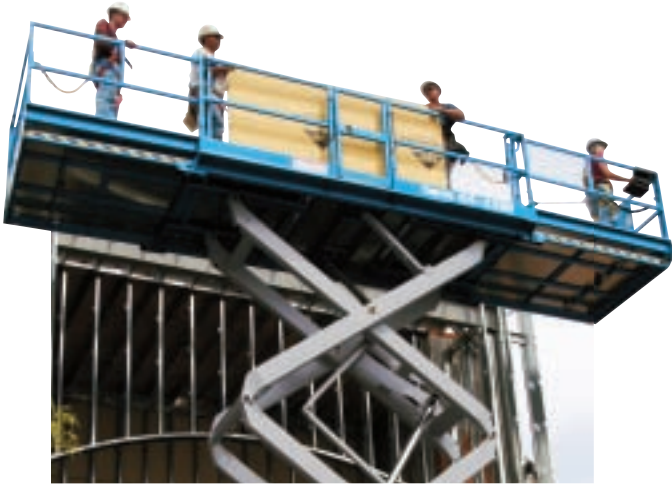

### MORE ROOM TO WORK

These units are ideal for jobs that require greater capacity for more workers, materials and tools. For added workspace, all RT models come standard with a multi-position slide-out extension deck on the front of the platform. A rear slide-out extension deck can be added to models GS™-3384 and up. In addition, power to the platform allows workers to use electrically powered tools.



### EASY SERVICE

On-board diagnostics help operators troubleshoot on the fly and make adjustments in the field to maximize uptime. Plus, slide- or pull-out engine trays allow easy access to components — no need to reach around obstacles inside the machine. Many parts and service procedures are common across the entire Genie® scissors line for cost-effective parts stocking and maintenance efficiencies.



### ROUGH TERRAIN MODELS AVAILABLE

GS™-2668 RT

GS™-3268 RT

GS™-3384 RT

GS™-3390 RT

GS™-4390 RT

GS™-5390 RT

# OPTIONS

## FOR ROUGH TERRAIN SELF-PROPELLED SCISSORS

GS™-2668 RT  
GS™-3268 RT  
GS™-3384 RT  
GS™-3390 RT  
GS™-4390 RT  
GS™-5390 RT

PLATFORM						
DUAL SLIDE-OUT EXTENSION DECK PACKAGE (FRONT & REAR)			○	○	○	○
AIR LINE TO PLATFORM	○	○	○	○	○	○
PIPE CRADLE PAIR	○	○	○	○	○	○
PLATFORM WORK LIGHT(S)	○	○	○	○	○	○
WARNING						
DUAL FLASHING BEACONS	○	○	○	○	○	○
MOTION ALARM	○	○	○	○	○	○
STABILITY						
AUTOMATIC LEVELING HYDRAULIC OUTRIGGERS	○	○	○	○	○	S
OSCILLATING AXLE	○	○		S	○	○
POWER						
2,000 AC WATT GENERATOR (120V/60Hz)	○	○	○	○	○	○
ENGINE						
HYDRAULIC OIL COOLER	○	○	○	○	○	○
DIESEL SCRUBBER/ SPARK ARRESTOR	○	○	○	○	○	○
COLD START PACKAGES (BY ENGINE TYPE)	○	○	○	○	○	○
TANKS						
SPARE PROPANE TANK	○	○	○	○	○	○
DUAL PROPANE TANK KIT	○	○	○	○	○	○
TIRES						
NON-MARKING RT TIRE	○	○	○	○	○	○
HIGH FLOTATION AIR-FILLED TIRES			○	○	○	○
HIGH FLOTATION FOAM-FILLED TIRES			○	○	○	○

○ = OPTION      S = STANDARD



### OSCILLATING AXLE

Genie's oscillating axle automatically senses the terrain and adjusts the axle position based on ground conditions for maximum stability.



### GENERATOR

This built-in hydraulically driven 120 V AC generator is available to supply power to the platform for operating tools.



### SELF-LEVELING HYDRAULIC OUTRIGGERS

Save time with Genie's automatic leveling hydraulic outriggers. All four outriggers automatically deploy simultaneously to ensure the lift is level on uneven ground before elevating the platform.


# SPECIFICATIONS

## SELF-PROPELLED SCISSORS

MODEL	WORKING HEIGHT		WIDTH		TURNING RADIUS*		LIFT CAPACITY		GRADEABILITY**
	US	Metric	US	Metric	US	Metric	US	Metric	
<b>ELECTRIC SCISSOR LIFTS</b>									
GS™-1530	21 ft	6.57 m	2 ft 6 in	.76 m	5 ft 1 in	1.55 m	600 lbs	272 kg	30%
GS™-1930	25 ft	7.79 m	2 ft 6 in	.76 m	5 ft 1 in	1.55 m	500 lbs	227 kg	30%
GS™-2032	26 ft	8.10 m	2 ft 8 in	.81 m	7 ft	2.13 m	800 lbs	363 kg	30%
GS™-2632	32 ft	9.92 m	2 ft 8 in	.81 m	7 ft	2.13 m	500 lbs	227 kg	25%
GS™-3232	38 ft	11.75 m	2 ft 8 in	.81 m	7 ft	2.13 m	500 lbs	227 kg	25%
GS™-2046	26 ft	8.10 m	3 ft 10 in	1.17 m	7 ft 6 in	2.29 m	1,200 lbs	544 kg	30%
GS™-2646	32 ft	9.92 m	3 ft 10 in	1.17 m	7 ft 6 in	2.29 m	1,000 lbs	454 kg	30%
GS™-3246	38 ft	11.75 m	3 ft 10 in	1.17 m	7 ft 6 in	2.29 m	700 lbs	318 kg	25%
GS™-2668 DC	32 ft	9.92 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,250 lbs	567 kg	30%
GS™-3268 DC	38 ft	11.75 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,000 lbs	454 kg	25%
<b>ROUGH TERRAIN SCISSOR LIFTS</b>									
GS™-2668 RT	32 ft	9.92 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,250 lbs	567 kg	35%
GS™-3268 RT	38 ft	11.75 m	5 ft 8 in	1.73 m	12 ft 1 in	3.68 m	1,000 lbs	454 kg	30%
GS™-3384 RT	39 ft	12.06 m	7 ft	2.13 m	19 ft 6 in	5.94 m	2,500 lbs	1,134 kg	50%
GS™-3390 RT	39 ft	12.06 m	7 ft 6 in	2.29 m	17 ft 6 in	5.33 m	2,500 lbs	1,134 kg	50%
GS™-4390 RT	49 ft	15.11 m	7 ft 6 in	2.29 m	17 ft 6 in	5.33 m	1,500 lbs	680 kg	50%
GS™-5390 RT	59 ft	18.15 m	7 ft 6 in	2.29 m	17 ft 6 in	5.33 m	1,500 lbs	680 kg	40%

\*Outside

\*\*Gradeability applies to driving on slopes, see operator's manual for details regarding slope ratings. Gradeability may vary depending on options installed on machine.

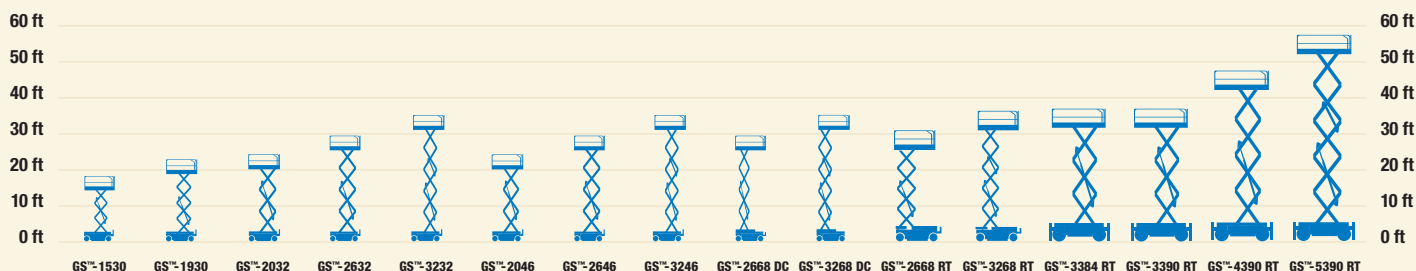



**GENIE HAS YOU COVERED**



[www.genieindustries.com](http://www.genieindustries.com)

#### **GENIE CORPORATE HEADQUARTERS**

18340 NE 76th Street, P.O. Box 97030, Redmond, Washington 98073-9730  
Telephone **+1 (425) 881-1800** • Toll Free in USA/Canada **+1 (800) 536-1800** • Fax +1 (425) 883-3475

#### **WORLDWIDE MANUFACTURING AND DISTRIBUTION**

Australia • Brazil • Caribbean • Central America • China • France • Germany • Italy • Japan • Korea • Mexico  
Southeast Asia • Spain • Sweden • United Arab Emirates • United Kingdom • United States

Effective Date: July, 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries. All rights are reserved. Terex® is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2008 Terex Corporation. Scissor Family 5K 0708J. Part No. 109305.