



# SAFETY WORK PLATFORMS

*“Star Attachments Turn a Forklift into a Whole Fleet of Equipment”*



**NEW** Safety Yellow powder-coated guardrails.

Quick-Tach & Slip-on-Forks  
Models Available

**SAFETY WORK PLATFORMS  
TURN YOUR FORKLIFT  
INTO AN  
AERIAL WORK PLATFORM**

Meets / Exceeds  
OSHA  
Requirements

- ▶ GOES WHERE SCISSOR-LIFTS CAN'T
- ▶ FASTER THAN SCAFFOLD
- ▶ PROVIDES A WIDER PLATFORM THAN BOOM LIFTS
- ▶ REACHES OVER OBSTRUCTIONS
- ▶ SIMPLE AND INEXPENSIVE



**Goes Where Scissor-Lifts Can't**




**Faster Than Scaffold**

# Safety Work Platforms for forklifts

## CHOOSE FROM 2 STYLES

Both are Quick & Easy to Install




"Slip-On-Forks"

...or



"Quick-Tach"

Forklift must be equipped with a "quick-tach".

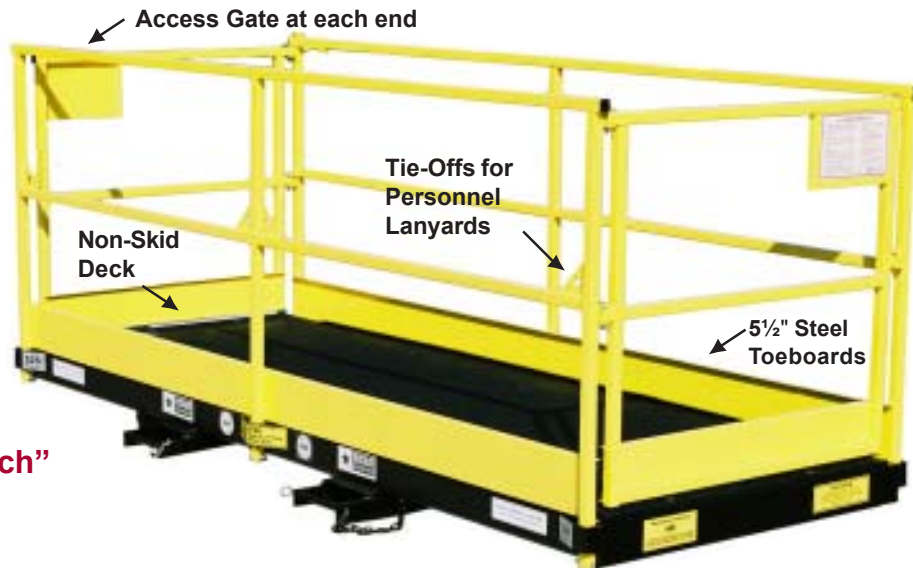

## Specifications

- ▶ **Full Perimeter Guard Rail System** constructed of 1 1/4" square steel tubing & consisting of a 42" high top rail, a mid rail, and 5 1/2" high toeboards. Access gates with drop pin latches are provided at each end. Entire Guard Rail System can be easily removed and laid flat on platform for transportation.
- ▶ **Deck** consists of a strong but lightweight engineered steel frame and replaceable plywood deck with a non-skid coating.
- ▶ The **"Universal Fit" Slip-On-the-Forks** design can be used with both Extendible Reach and Straight Mast forklifts. Forks slide into steel fork pockets and are secured with two heavy duty steel pins behind the heel of the forks. They are designed for use with a 48" or wider carriage and 48" long forks up to 7" wide and 2 3/4" thick. Forks longer than 48" can be used, however, they will extend out past the front of the platform.
- ▶ The **Quick-Tach** models are built to fit specific makes & models of forklifts that are equipped with a quick-tach. The forks and carriage are removed and the Platform attaches to the boom.
- ▶ **All Models are rated at 1,000 lbs. load capacity.** Rating applies to platform only and does not reflect capacity of forklift.
- ▶ **Optional Mast Protection Screen (Model 1250)** protects personnel from moving parts of forklift mast. Constructed of square steel tubing and expanded metal, the screen measures 42" wide x 84" tall. It attaches to the back guardrail with u-bolts. A mast protection screen should be used with all straight mast forklifts and with any others where a mast poses a safety hazard.



### UNIVERSAL FIT "Slip-on-Forks" MODELS

Model	Size	Weight
1204	4' x 4'	315 lbs.
1206	4' x 6'	400 lbs.
1208	4' x 8'	455 lbs.
1210	4' x 10'	526 lbs.
1212	4' x 12'	630 lbs.
1216	4' x 16'	750 lbs.

### "QUICK-TACH" MODELS

Model	Size	Weight
1204QT	4' x 4'	± 475 lbs.
1206QT	4' x 6'	± 525 lbs.
1208QT	4' x 8'	± 575 lbs.
1210QT	4' x 10'	± 630 lbs.

Specify forklift make & model when ordering QT platforms.

### SPECIAL SAFETY NOTE:

A.S.M.E. Standard B56.6 for Rough Terrain Forklift Trucks states that ... the platform floor dimension shall not exceed the overall width of the truck (measured across the load bearing tires) plus 10" on either side. Star Industries recommends that all users of Star Safety Work Platforms conform to this requirement as well as the other requirements of B56.6. Furthermore, users should conform to all applicable local, state, and federal safety standards. Star Industries recommends you contact the respective forklift manufacturer for any additional safety requirements or limitations.

Platforms are shipped crated with guardrails laid flat.



4101 Garland Dr., Fort Worth, TX 76117  
 Ph 817-485-6073 Fax 817-428-6008  
 USA & Canada Toll Free 800-541-1797  
[www.starindustries.com](http://www.starindustries.com)

Dealer: