



Portable rebar benders
& cutters



Rebar EQUIPMENT

TO PURCHASE THIS PRODUCT PLEASE CONTACT US



**Equipment Financing and
Extended Warranties Available**



**Discount-Equipment.com is your online resource for
commercial and industrial quality parts and equipment sales.**

561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar

From residential to commercial applications **Multiquip** provides the ideal portable rebar cutting solutions that work faster, safer and are more economical options to torches or saws.

- **Easily move around any job site** with HBC series compact and portable handheld cutters.
- **Maintains a safe working environment** by preventing rebar fragments from projecting in to the air with the rebar protective cover.
- **Complete commercial and residential rebar applications** with cutting capacity options of 3/4" or 1".
- **Reliability is guaranteed** thanks to actual load testing prior to delivery.
- **Easily cut different diameters of rebar** by adjusting the space between the blades with the spacing bolt and nut.
- **Protect and easily store your rebar cutter** with the carrying box as a standard feature.
- **Easily return the cutter blade to its starting position** in the event of a jam with the return valve.
- **Cut through up to grade 60 rebar** with an electrohydraulic design coupling a powerful electric motor with a compact hydraulic pump.
- **Canadian models (HBC19BCSA and HBC25BCSA)** meet Canadian electrical requirements.



HBC19B

Maximum Cutting Diameter In (mm) 3/4 (19)

#6 rebar grade 60

Voltage/Amperage 115V 60Hz 11 amps

Maximum Cutting Speed 2.5 sec.

Operating Weight Lb (Kg) 28.2 (12.8)



HBC25B

Maximum Cutting Diameter In (mm) 1 (25) #8 rebar grade 60

Voltage/Amperage 115V 60Hz 13 amps


Maximum Cutting Speed 3.5 sec.

Operating Weight Lb (Kg) 48.5 (22)



Hydraulic Pump

allows for maximum performance in a light, small, quiet and smooth operating package.

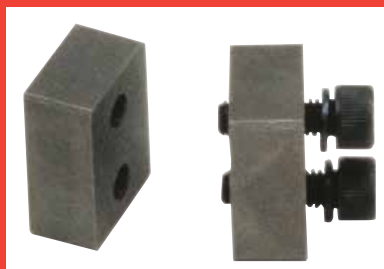

Blades

rotatable block provides 4 cutting edges to maximize service life.



Speed up production with the Multiquip MB25A Rebar Bender. This portable, operator-friendly machine bends up to 1" diameter rebar in seconds.



MB25A

Maximum Bending Diameter In (mm) 1" (25) #8 rebar grade 60

Range of Bends 0 to 180 degrees

Voltage/Amperage 115V 60Hz 13 amps

Maximum Bending Speed 5 sec. for 180 degree angle

Operating Weight Lb (Kg) 227 (103)

- **Versatility on the job site or in the shop** thanks to a compact and portable design.
- **Control the bending process** with user friendly push-button start and stop design.
- **Fine tune your bending angle from 0 to 180 degrees** with an easy to use angle select dial.
- **Enjoy fast, smooth and quiet operation** thanks to the electromagnetic clutch.
- **Energy efficient and less noise creation** because motor engages only during bending actuation.
- **No maintenance required and reduced contamination** due to the electromechanical design and sealed gear case.
- **Enhanced portability** with two integrated lifting handles.
- **Readily switch between rollers and collars** to match the diameter of rebar to be bent with a tool kit included as a standard feature.
- **Protection from internal contamination** with a waterproof cover.
- **Enjoy hands free bending** with a foot pedal control switch included as a standard feature.



Angle adjustment knob allows fine tuning of bending angle.



Enclosed clean-out slot prevents rebar shavings from falling into the housing.


Rebar Bending Capacity

Grade 40 Intermediate Grade — 70,000 psi	3/8" to 1" (9 to 25.4 mm)
Grade 50 High Grade — 80,000 psi	3/8" to 1" (9 to 25.4 mm)
Grade 60 High Strength Grade — 90,000 psi	3/8" to 1" (9 to 25.4 mm)



Foot Switch (included)

Frees operator's hands for high-production work.

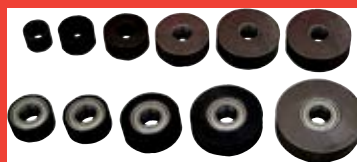

Attachments (included)

5 rollers and 6 collars to accurately bend rebar up to 1" in diameter.



Specifications

REBAR CUTTERS

Model	HBC19B	HBC25B
Canadian Model [‡]	HBC19BCSA	HBC25BCSA
Cutting Capacity Grade 40		
Bar Size	No. 6	No. 8
in. (mm)	3/4 (19)	1 (25)
Cutting Capacity Grade 50		
Bar Size	No. 6	No. 8
in. (mm)	3/4 (19)	1 (25)
Cutting Capacity Grade 60		
Bar Size	No. 6	No. 8
in. (mm)	3/4 (19)	1 (25)
Max. Cutting Speed	2.5 sec.	3.5 sec.
Rated Power	1330 watts	1430 watts
Electric Motor	115 volt, 60 Hz, single-phase AC	
Dimensions and Weight		
Length in. (cm)	15.6 (39.6)	18.9 (48)
Width in. (cm)	4.4 (11)	5.4 (13.7)
Height in. (cm)	8.7 (23)	10.6 (26.9)
Operating Weight lb. (kg)	28.2 (12.8)	48.5 (22)
Shipping Weight lb. (kg)	39 (17.7)	67 (30.3)

Always wear approved safety equipment and clothing when operating these machines.

For your safety, these products should not be used with ungraded rebar.

WARRANTY: Rebar Cutters & Benders

1 year parts and labor.

*Use graded rebar only.

[‡]Canadian models meet Canadian electrical requirements.

REBAR BENDER

Model	MB25A
Maximum Bending Capacity in. (mm)	
1 (25.4)	
Range of Bends	
0° to 180°	
Standard Bending Radius	
Rebar No. in. (mm)	Radius in. (mm)
No. 3 — 3/8 (9.5)	1.125 (29)
No. 4 — 1/2 (12.7)	1.5 (38)
No. 5 — 5/8 (15.9)	1.875 (48)
No. 6 — 3/4 (19)	2.25 (57)
No. 7 — 7/8 (22.2)	2.625 (67)
No. 8 — 1 (25.4)	3 (76)
Maximum Bending Speed	
Approximately 5 seconds for 180° angle	
Motor Specifications	
Electric Motor*	115V, 60 Hz, Single Phase, AC
Rated Power (amps)	13
Dimensions and Weight	
Dimensions LxWxH in. (cm)	21x19.5x17 (53x50x43)
Operating Weight lbs. (kg)	227 (103)
Shipping Weight lbs. (kg)	331 (150)
Standard Equipment	
Foot Switch	
Rollers (5 sizes)	
Collars (6 sizes)	
Tool Kit	
Waterproof Cover	

* International Standard Voltage and Hz Electric Motor models available upon request. Specify Voltage and Hz with order.



TO PURCHASE THIS PRODUCT PLEASE CONTACT US



**Equipment Financing and
Extended Warranties Available**



**Discount-Equipment.com is your online resource for
commercial and industrial quality parts and equipment sales.**

561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar