



See the light.



LED GLOBUG

GloBug lighting is available in LED and conventional metal halide configurations. The industry's finest glare-free lighting systems - exclusively from Multiquip.

GB3LED - 300W LED



Vlodel	GB3LED	
/oltage (V)	115	
Current (A)	2.7A @ 115V	
Hertz (Hz)	50-60	
_amp (W)	300W LED	
umens	38,000 (High)	
Dimmer Switch	Low/Med/High	
Balloon	33.5″ x 21″	
Vlast (Tripod)	2-Stage	
lotal Height	12.5′	
lotal Weight	27 lbs.	
Vin. Generator	350 Watts	
Wind Limits	25 MPH	
/lodel	GB3LEDB	
his unit is the full balloon lamp assembly nly (no Tripod stand) that can be placed onto ny GloBug mast.		
otal Weight	17.5 lbs.	

- 40,000 hour LED life
- 3 dimmer stages to control light output Exceptional color rendering light prope


LED **Advantages**


- Shock resistant LED assembly
- Immediate strike / restrike operations
- 63% less heat emission than metal halide



	Model	GB8LED	
	Voltage (V)	115	
-	Current (A)	6.9A @ 115V	
	Hertz (Hz)	50-60	
	Lamp (W)	800W LED	
	Lumens	110,000 (High)	
	Dimmer Switch	Low/Med/High	
	Balloon	47" x 28"	
	Mast (Pentapod)	3-Stage	
	Total Height	13.2′	
	Total Weight	48 lbs.	
	Min. Generator	850 Watts	
S S	Wind Limits	25 MPH	
C		-	
	Model	GB8LEDB	
		oon lamp assembly	
	Model This unit is the full ballo only (no Pentapod stand	oon lamp assembly	
	Model This unit is the full ballo only (no Pentapod stand onto any GloBug mast.	oon lamp assembly d) that can be placed	
ıt	Model This unit is the full ball only (no Pentapod stam onto any GloBug mast. Total Weight	25 lbs. GBC8LED III GB8LED8 Balloon o Pentapod stand), mpact mobile cart with	
ut erties	Model This unit is the full ball only (no Pentapod stam onto any GloBug mast. Total Weight Model This unit includes: (1) ft Lamp assembly only (n (2) Steel, zinc plated co two-stage air assisted n	25 lbs. GBC8LED III GB8LED8 Balloon o Pentapod stand), mpact mobile cart with	

25 MPH

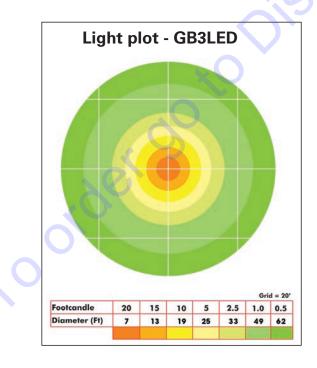

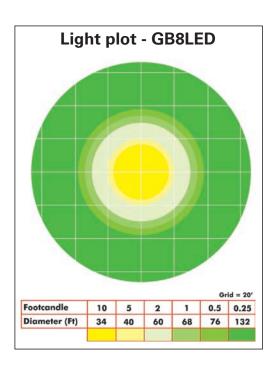

Wind Limits



events, municipality and industrial applications. GBW and GBC - 1000W **GB12BW - 400W**

GloBug applications include construction sites, emergency response, law enforcement, special

- Model GB12BW Voltage (V) 120 Current (A) 4A @ 120V Hertz (Hz) 50-60 400W Metal Lamp (1) Halide 34,000 Lumens 33.5" x 21" Balloon Mast (Tripod) 2-Stage **Total Height** 10.5′ **Total Weight** 35 lbs. Min. Generator 450 Watts Wind Limits 25 MPH Model GB12BP This unit is the full balloon lamp assembly only (no tripod stand) that can be placed onto any GloBug mast. **Total Weight** 17 lbs.
- 360° glare-free diffused lighting
- Integrated electric ballast inside lamp housing
- Perfect elliptical balloon shape
- Balloon is washable and repairable
- Quick, and easy set-up and transportation
- Rugged roll cage supports and protects lamps
- High quality collapsible air-shock masts
- GBC steel cart with (3) outriggers and brakes
- GloBug units easily store in ready-carry vinyl cases
- Units operate in inclement weather conditions
- Meets DOT diffused lighting specifications






Model	GBW
Voltage (V)	120
Current (A)	9.3A @ 120V
Hertz (Hz)	50-60
Lamp (1)	1kW Metal Halide
Lumens	107,000
Balloon	47″ x 28″
Mast (Pentapod)	3-Stage
Total Height	13.2′
Total Weight	52 lbs.
Min. Generator	1,200 Watts
Wind Limits	25 MPH
Model	GBP
This unit is the full balloon lamp assembly (no pentapod stand) that can be placed onto any GloBug mast.	
Total Weight	23 lbs.



Model	GBC
Voltage (V)	120
Current (A)	9.3A @ 120V
Hertz (Hz)	50-60
Lamp (1)	1kW Metal Halide
Lumens	107,000
Balloon	47″ x 28″
Mast	3-Stage
Cart	Steel, zinc plated with (3) outriggers and brake
Total Height	10.6′
Total Weight	127 lbs.
Min. Generator	1,200 Watts
Wind Limits	25 MPH

Light plot - GBC & GBW





Equipment mount models easily affix to a wide range of vehicles, machinery and equipment to provide mobile glare-free lighting to enhance work site illumination and safety.

U	-
7	
U	
Ζ	
	1
U	
Σ	
	3
Z	~
	G
<u> </u>	f
	tı
5	ti re si
	S
$\overline{\mathbf{O}}$	
Ш	

GB12BS - 400W



Glare-free lighting provides safety benefits for work crews and vehicle traffic. Complies with DOT requirements for proper job site illumination.

Model	GB12BS	Model	GBS
Voltage (V)	120	Voltage (V)	120
Current (A)	4A @ 120V	Current (A)	9.3A @ 120V
Hertz (Hz)	50-60	Hertz (Hz)	50-60
Lamp	400W Metal Halide	Lamp	1 kW Metal Halide
Lumens	34,000	Lumens	107,000
Balloon	33.5″ x 21″	Balloon	47" x 28"
Mast	(1) Straight pole; (1) 90° offset pole	Mast	(1) Straight pole; (1) 90° offset pole
Total height	6.1′	Total height	6.5′
Total weight	35 lbs.	Total weight	40 lbs.
Min. Generator	450 Watts	Min. Generator	1,200 Watts
Wind Limits	25 MPH	Wind Limits	26 MPH
(1) GB12BP (400W) (1) G (1) Straight pole (1) S (1) 90° off-set pole (1) 9		Mount Assembly (1) GBP (1000W) (1) Straight pole (1) 90° off-set po (2) Universal cla	



GloBug equipment mount models provide versatile and complete lighting solutions. Each model includes the balloon light assembly, universal mounting clamps and mounting hardware.

GBMP - MOUNTING PLATE



GBMP Model GBHM Model type Mount Poles & Plate Hitch Mount Mount plate Tow hitch mount **Items Included** 2 poles 2 poles Hardware Hardware Supports GB12BP, GBP, GB12BP, GBP, Globug **GB3LEDB GB3LEDB** models

GBHM - HITCH MOUNT

GBS - 1000W



The Hitch Mount slides over 2" x 2" draw bars. This attachment is perfect for utility and job-site vehicles. The GBHM supports all E-ballast GloBug balloon lighting units.



The Mounting Plate accessory attaches to flat surfaces and is ideal for installation on construction equipment and trailers. The GBMP supports all E-ballast GloBug balloon lighting units.



GBMP attaches to the sides of equipment and supports all E-ballast GloBug balloon lighting units.



GBHM slides over and secures to the most tow bar hitches. Draw bar length must accommodate 5" of length to affix the GBHM.

The 4-Spot 1,600 Watt Light Tower is a very compact, mobile lighting solution for residential, industrial, and commercial job site applications.




GB43SC - 1,600W METAL HALIDE

- Powerful light source in a small footprint
- Solid aluminum lamp housing can be individually oriented to best support the lighting requirements
- Operates on hard electrical connections as well as most portable generators
- Cart handle bar for easy steering and transportation
- Counterweights lock safety outriggers into position
- Lifting bale for safe tower handling
- 5 Footcandle power out to 90'
- Folds to tight 3.5' x 3' x 5.6' package for transportation and storage



Model	GB43SC	
Voltage (V)	120	
Current (A)	16 @ 120V	
Hertz (Hz)	60	
Lamp (4)	400W Metal Halide	
Lamp Type	Metal Spot Light	
Lumens	136,000	
Plug Type	NEMA 5-20P	
Mast (Cart)	3-Stage	
Mast (Raise)	Manual Winch	
Cart	Steel, Zinc Plated	
Outriggers	2	
Wheels (4)	8" Pneumatic	
Total Height	13.7′	
Storage Height	41" x 36" x 67"	
Turning Radius	7.7′	
Total Weight	364 lbs	
Min. Generator	2,500 Watts	
Wind Limits	40 MPH	





The GB2000 easily connects to the electrical and ballast systems of most conventional light towers to provide exceptional glare-free lighting.



GB2000 - 2,000W METAL HALIDE

- 2,000 Watt 360° glare-free diffused lighting system
- Seamlessly works with the existing light tower electrical systems
- Integrated balloon fan inside lamp housing
- Perfect cylindrical balloon shape
- Balloon is washable and repairable
- Quick disconnect electrical fittings
- Excellent light coverage of over 240 feet
- Quick, and easy set-up and transportation
- Meets DOT diffused lighting specifications
- Comes with all T-Bar mounting bracket and all necessary hardware

Model	GB2000


Assembly includes: (1) GB2000 balloon lamp assembly (1) Universal bracket assembly (1) Electrical Junction box and connection hardware		
Voltage (V)	238-268	
Current (A)	8.2A @ 240V	
Hertz (Hz) 50-60		
Lamp (2) 1kW Metal Halide		
Lumens 220,000		
Balloon (Inflated)	34.5" x 35.5"	
Total Height	39″	
Total Weight 31 lbs		
Min. Generator 3,200 Watts		
Wind Limits 40 MPH		



Balloon lamp assembly folds into a convenient carrying case


The GB2000 easily connects to the electrical and ballast systems of the light tower for seamless operations. Two conventional lamps may still be operated with the GB2000.



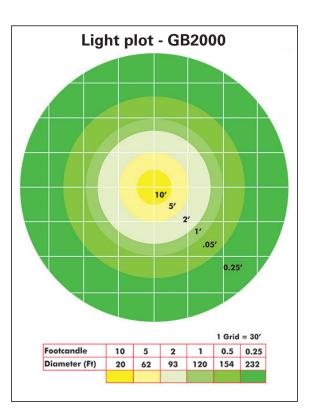



The **GB4000** provides powerful glare-free lighting for Multiquip light towers users. This GloBug meets regulatory requirements, allows for diffused illuminance that eliminates shadows, improves operator job site awareness, and curtails caustic light glare to on-coming automotive traffic.

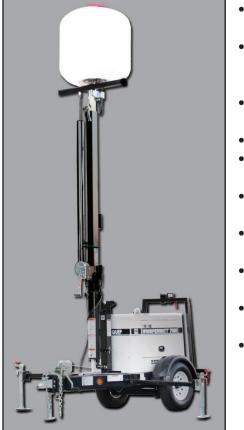

GB4000 - 4,000W METAL HALIDE

Total Weight

Wind Limits

Min. Generator

- 4,000 Watt 360° glare-free diffused lighting system
- · Seamlessly works with the existing light tower electrical systems
- Integrated balloon fan inside housing
- Perfect cylindrical balloon shape
- Balloon is washable and repairable
- Quick disconnect electrical fittings
- Excellent light coverage of over 300 feet
- Quick, and easy set-up and transportation
- Meets DOT diffused lighting specifications
- Comes with all T-Bar mounting bracket and all necessary hardware

Model	GB4000
Assembly includes: (1) GB4000 balloon lar (1) Universal bracket a (1) Electrical Junction hardware	ssembly
Voltage (V)	120
Current (A)	37.2A @ 240V
Hertz (Hz)	50-60
Lamp (4)	1kW Metal Halide
Lumens	428,000
Balloon (Inflated)	55.1" x 47.2"

41 lbs

40 MPH

4,200 Watts




Balloon lamp assembly folds into a convenient carrying case




The GB4000 easily connects to the electrical and ballast systems of the light tower for seamless operation.



Diffused, glare-free light coverage of up to 300'

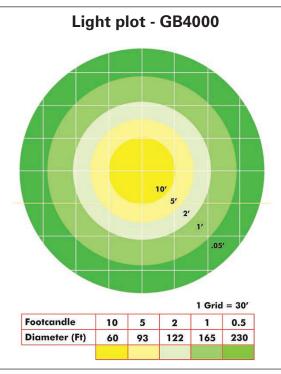



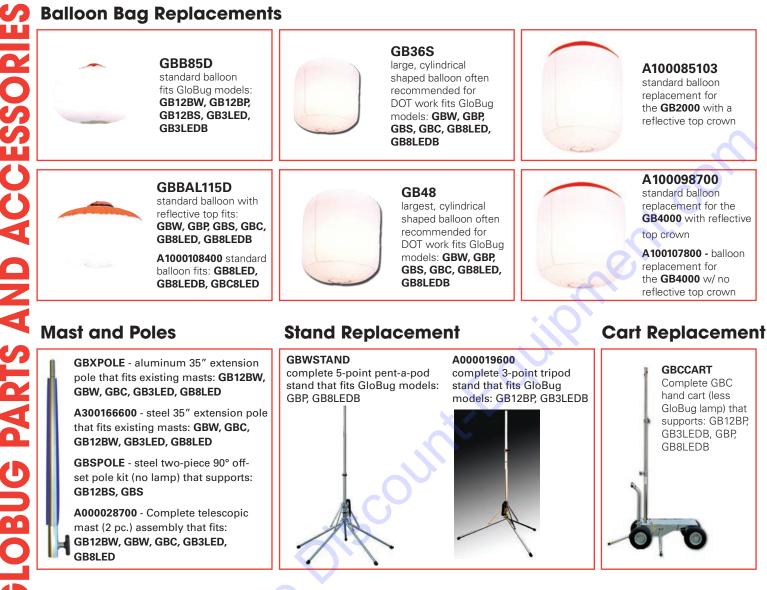

Hanging Kit



Provides the balloon and hardware to orient the GloBug lamp to be suspended from above. Fits: GBW, GBC, GBS, GBP, GB12BW, GB12BP, GB12BS, GB3LED, GB3LEDB, GB8LED, GB8LEDB

A000034400 - Hanging Kit hardware and fasteners

A100086400 - Hanging Kit balloon bag

Balloon Message Strips



Personalized Message Strips are available at your request. They can highlight the particular application, support the job site, or enhance your business's exposure. **Contact** Discount-Equipment for information on standard or personalized value added message strips that can include company logos, event definition, or special occasion.

Message Strips easily velcro to fit balloons: GB12BW, GB3LED, GB12BP – 9" x 31" strip GBW, GBP, GBC, GBS, GB8LED – 12" x 43" strip GB36S – 36" x 36" strip GB48 – 48" x 48" strip GB2000 – 24" x 43" GB4000 – 26" x 54"



TO PURCHASE THIS PRODUCT PLEASE CONTACT US



Equipment Financing and Extended Warranties Available



Discount-Equipment.com is your online resource for commercial and industrial quality parts and equipment sales. 561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment ,Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep,Small Line, Wanco, Yanmar