




SEV-50X

Outstanding Features

- Impellers and Volutes are Constructed of Cast Iron for Durability and Long Operating Life (Engine Pumps Larger than 1" NPT)
- Pump Housings are Made of Die Cast Aluminum for Strength, Weight Reduction and Portability
- Strong Transport Protection Powder Coated Steel Roll Cages (Engine Pumps 2" or Larger)
- Reliable **KOSHIN** Engines with Low Oil Shut Off (Engine Pumps 2" or Larger)
- Self Priming Up to 26', and a Maximum Head up to 105'
- Two-Year Limited Warranty on Engines and Pumps

Performance Curves

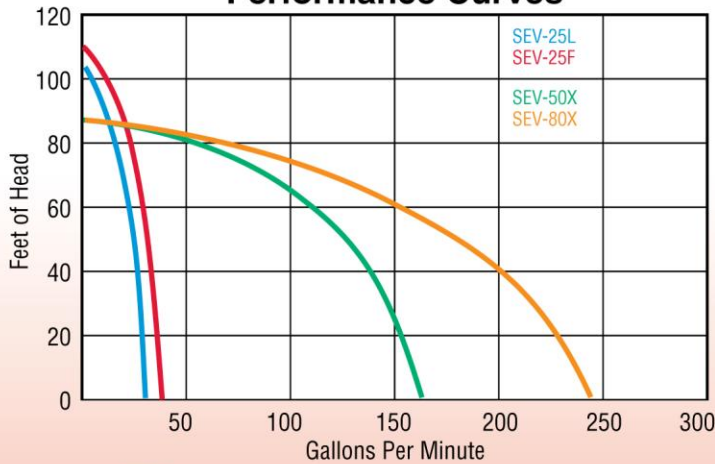

SEV-80X



SEV-25L



SEV-25F

NEW!
2015

	SEV-25L	SEV-25F	SEV-50X	SEV-80X
Suction Discharge Size	1" NPT	1" NPT	2" NPT	3" NPT
Maximum Output	29 GPM	35 GPM	163 GPM	246 GPM
Maximum Discharge Head	105'	115'	90'	90'
Maximum Suction Lift	26'	26'	26'	26'
Maximum Pressure	45.5 PSI	49.7 PSI	39 PSI	39 PSI
Engine Model	KC26	K35	K180	K180
Engine Displacement	26 cc	35 cc	179 cc	179 cc
Engine Horsepower	0.93 HP	1.1 HP	4.7 HP	4.7 HP
Fuel Tank Capacity	0.12 Gal	0.19 Gal	0.95 Gal	0.95 Gal
Fuel Load Run Time	0.83 Hrs	1 Hr	2 Hrs	2 Hrs
Fuel Type	2 Stroke 50:1	Unleaded Automotive Gasoline		
Packaged Weight	16 Lbs	22 Lbs	56 Lbs	70 Lbs
Packaged Dimensions (LxWxH)	15x10"x13"	16"x11"x15"	18"x14"x15"	20"x15"x18"