

See the light.



GloBug lighting is available in LED and conventional metal halide configurations. The industry's finest glare-free lighting systems — exclusively from Multiquip.

GB3LED - 300W LED



Model	GB3LED
Voltage (V)	115
Current (A)	2.7A @ 115V
Hertz (Hz)	50-60
Lamp (W)	300W LED
Lumens	38,000 (High)
Dimmer Switch	Low/Med/High
Balloon	33.5" x 21"
Mast (Tripod)	2-Stage
Total Height	12.5′
Total Weight	27 lbs.
Min. Generator	350 Watts
Wind Limits	25 MPH
Model	GB3LEDB
This unit is the full balloon lamp assembly only (no Tripod stand) that can be placed onto any GloBug mast.	

Madal	CDOLED
Model	GB8LED
Voltage (V)	115
Current (A)	6.9A @ 115V
Hertz (Hz)	50-60
Lamp (W)	800W LED
Lumens	110,000 (High)
Dimmer Switch	Low/Med/High
Balloon	47" x 28"
Mast (Pentapod)	3-Stage
Total Height	13.2′
Total Weight	48 lbs.
Min. Generator	850 Watts
Wind Limits	25 MPH
Model	GB8LEDB

GB8LED - 800W LED

This unit is the full balloon lamp assembly only (no Pentapod stand) that can be placed onto any GloBug mast.

Total Weight 25 lbs.

Model GBC8LED

This unit includes: (1) full GB8LED8 Balloon Lamp assembly only (no Pentapod stand),

Lamp assembly only (no Pentapod stand), (2) Steel, zinc plated compact mobile cart with two-stage air assisted mast, (3) cart outriggers and brake.

Total Weight	127 lbs.
Wind Limits	25 MPH

LED Advantages


• 40,000 hour LED life


Total Weight

- 3 dimmer stages to control light output
- Exceptional color rendering light properties
- Shock resistant LED assembly

17.5 lbs.

- Immediate strike / restrike operations
- 63% less heat emission than metal halide

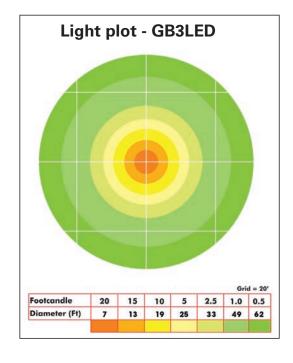

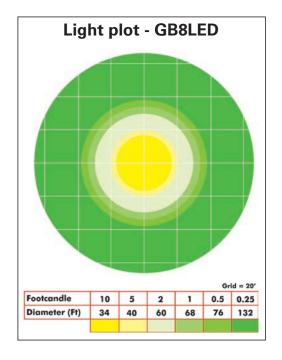



GloBug applications include construction sites, emergency response, law enforcement, special events, municipality and industrial applications.

GB12BW - 400W



Model	GB12BW
Voltage (V)	120
Current (A)	4A @ 120V
Hertz (Hz)	50-60
Lamp (1)	400W Metal Halide
Lumens	34,000
Balloon	33.5" x 21"
Mast (Tripod)	2-Stage
Total Height	10.5′
Total Weight	35 lbs.
Min. Generator	450 Watts
Wind Limits	25 MPH

Model GB12BP This unit is the full balloon lamp assembly

This unit is the full balloon lamp assembly only (no tripod stand) that can be placed onto any GloBug mast.

Total Weight 17 lbs.

- 360° glare-free diffused lighting
- Integrated electric ballast inside lamp housing
- Perfect elliptical balloon shape
- Balloon is washable and repairable
- Quick, and easy set-up and transportation
- Rugged roll cage supports and protects lamps
- High quality collapsible air-shock masts
- GBC steel cart with (3) outriggers and brakes
- GloBug units easily store in ready-carry vinyl cases
- Units operate in inclement weather conditions
- Meets DOT diffused lighting specifications

GBW and GBC - 1000W




Model	GBW
Voltage (V)	120
Current (A)	9.3A @ 120V
Hertz (Hz)	50-60
Lamp (1)	1kW Metal Halide
Lumens	107,000
Balloon	47" x 28"
Mast (Pentapod)	3-Stage
Total Height	13.2′
Total Weight	52 lbs.
Min. Generator	1,200 Watts
Wind Limits	25 MPH
	ODD


another.		
This unit is the full balloon lamp assembly (r		
pentapod stand) that can be placed onto any		
GloBug mast.		

Total Weight 23 lbs.



GBC	
120	
9.3A @ 120V	
50-60	
1kW Metal Halide	
107,000	
47" x 28"	
3-Stage	
Steel, zinc plated with (3) outriggers and brake	
10.6′	
127 lbs.	
1,200 Watts	
25 MPH	







Equipment mount models easily affix to a wide range of vehicles, machinery and equipment to provide mobile glare-free lighting to enhance work site illumination and safety.

GB12BS - 400W

GBS - 1000W



Glare-free lighting provides safety benefits for work crews and vehicle traffic. Complies with DOT requirements for proper job site illumination.

Model	GB12BS	Model	GBS
Voltage (V)	120	Voltage (V)	120
Current (A)	4A @ 120V	Current (A)	9.3A @ 120V
Hertz (Hz)	50-60	Hertz (Hz)	50-60
Lamp	400W Metal Halide	Lamp	1 kW Metal Halide
Lumens	34,000	Lumens	107,000
Balloon	33.5" x 21"	Balloon	47" x 28"
Mast	(1) Straight pole; (1) 90° offset pole	Mast	(1) Straight pole; (1) 90° offset pole
Total height	6.1′	Total height	6.5′
Total weight	35 lbs.	Total weight	40 lbs.
Min. Generator	450 Watts	Min. Generator	1,200 Watts
Wind Limits	25 MPH	Wind Limits	26 MPH
Mount Assembly	, includes:	Mount Assambly	, includes:

Mount Assembly includes:

- (1) GB12BP (400W)
- (1) Straight pole
- (1) 90° off-set pole
- (2) Universal clamps, and hardware

Mount Assembly includes:

- (1) GBP (1000W)
- (1) Straight pole
- (1) 90° off-set pole
- (2) Universal clamps, and hardware



GloBug equipment mount models provide versatile and complete lighting solutions. Each model includes the balloon light assembly, universal mounting clamps and mounting hardware.

GBMP - MOUNTING PLATE

GBHM - HITCH MOUNT



The Mounting Plate accessory attaches to flat surfaces and is ideal for installation on construction equipment and trailers. The GBMP supports all E-ballast GloBug balloon lighting units.





GBMP attaches to the sides of equipment and supports all E-ballast GloBug balloon lighting units.



GBHM slides over and secures to the most tow bar hitches. Draw bar length must accommodate 5" of length to affix the GBHM.



The Hitch Mount slides over 2" x 2" draw bars. This attachment is perfect for utility and job-site vehicles. The **GBHM** supports all E-ballast GloBug balloon lighting units.



The 4-Spot 1,600 Watt Light Tower is a very compact, mobile lighting solution for residential, industrial, and commercial job site applications.




GB43SC - 1,600W METAL HALIDE

- Powerful light source in a small footprint
- Solid aluminum lamp housing can be individually oriented to best support the lighting requirements
- Operates on hard electrical connections as well as most portable generators
- Cart handle bar for easy steering and transportation
- Counterweights lock safety outriggers into position
- Lifting bale for safe tower handling
- 5 Footcandle power out to 90'
- Folds to tight 3.5' x 3' x 5.6' package for transportation and storage





Model	GB43SC
Voltage (V)	120
Current (A)	16 @ 120V
Hertz (Hz)	60
Lamp (4)	400W Metal Halide
Lamp Type	Metal Spot Light
Lumens	136,000
Plug Type	NEMA 5-20P
Mast (Cart)	3-Stage
Mast (Raise)	Manual Winch
Cart	Steel, Zinc Plated
Outriggers	2
Wheels (4)	8" Pneumatic
Total Height	13.7′
Storage Height	41" x 36" x 67"
Turning Radius	7.7'
Total Weight	364 lbs
Min. Generator	2,500 Watts
Wind Limits	40 MPH





The GB2000 easily connects to the electrical and ballast systems of most conventional light towers to provide exceptional glare-free lighting.



GB2000 - 2,000W METAL HALIDE

- 2,000 Watt 360° glare-free diffused lighting system
- Seamlessly works with the existing light tower electrical systems
- Integrated balloon fan inside lamp housing
- Perfect cylindrical balloon shape
- Balloon is washable and repairable
- Quick disconnect electrical fittings
- Excellent light coverage of over 240 feet
- Quick, and easy set-up and transportation
- Meets DOT diffused lighting specifications
- Comes with all T-Bar mounting bracket and all necessary hardware

Model	GB2000	
Assembly includes: (1) GB2000 balloon lamp assembly (1) Universal bracket assembly (1) Electrical Junction box and connection hardware		
Voltage (V)	238-268	
Current (A)	8.2A @ 240V	
Hertz (Hz)	50-60	
Lamp (2)	1kW Metal Halide	
Lumens	220,000	
Balloon (Inflated)	34.5" x 35.5"	
Total Height	39"	
Total Weight	31 lbs	
Min. Generator	3,200 Watts	
Wind Limits	40 MPH	




Balloon lamp assembly folds into a convenient carrying case



The GB2000 easily connects to the electrical and ballast systems of the light tower for seamless operations. Two conventional lamps may still be operated with the GB2000.



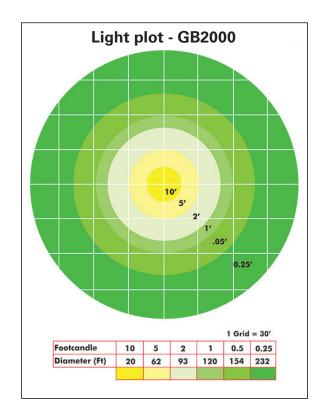



The **GB4000** provides powerful glare-free lighting for Multiquip light towers users. This GloBug meets regulatory requirements, allows for diffused illuminance that eliminates shadows, improves operator job site awareness, and curtails caustic light glare to on-coming automotive traffic.

GB4000 - 4,000W METAL HALIDE



- 4,000 Watt 360° glare-free diffused lighting system
- Seamlessly works with the existing light tower electrical systems
- Integrated balloon fan inside housing
- Perfect cylindrical balloon shape
- Balloon is washable and repairable
- Quick disconnect electrical fittings
- Excellent light coverage of over 300 feet
- Quick, and easy set-up and transportation
- Meets DOT diffused lighting specifications
- Comes with all T-Bar mounting bracket and all necessary hardware

Model	GB4000
Assembly includes: (1) GB4000 balloon lamp assembly (1) Universal bracket assembly (1) Electrical Junction box and connection hardware	
Voltage (V)	120
Current (A)	37.2A @ 240V
Hertz (Hz)	50-60
Lamp (4)	1kW Metal Halide
Lumens	428,000
Balloon (Inflated)	55.1" x 47.2"
Total Weight	41 lbs
Min. Generator	4,200 Watts
Wind Limits	40 MPH




Balloon lamp assembly folds into a convenient carrying case



The GB4000 easily connects to the electrical and ballast systems of the light tower for seamless operation.



Diffused, glare-free light coverage of up to 300'

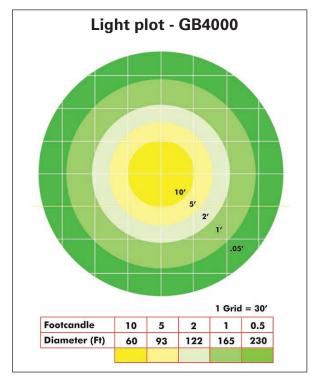



Balloon Bag Replacements



GBB85D

standard balloon fits GloBug models: GB12BW, GB12BP, GB12BS, GB3LED, GB3LEDB



GB36S

large, cylindrical shaped balloon often recommended for DOT work fits GloBug models: GBW, GBP, GBS, GBC, GB8LED, GB8LEDB



A100085103

standard balloon replacement for the **GB2000** with a reflective top crown



GBBAL115D

standard balloon with reflective top fits: GBW, GBP, GBS, GBC, GB8LED, GB8LEDB

A1000108400 standard balloon fits: GB8LED, GB8LEDB, GBC8LED



GB48

largest, cylindrical shaped balloon often recommended for DOT work fits GloBug models: GBW, GBP, GBS, GBC, GB8LED, GB8LEDB



A100098700

standard balloon replacement for the **GB4000** with reflective top crown

A100107800 - balloon replacement for the **GB4000** w/ no reflective top crown

Mast and Poles

GBXPOLE - aluminum 35" extension pole that fits existing masts: **GB12BW**, **GBW**, **GBC**, **GB3LED**, **GB8LED**

A300166600 - steel 35" extension pole that fits existing masts: GBW, GBC, GB12BW, GB3LED, GB8LED

GBSPOLE - steel two-piece 90° offset pole kit (no lamp) that supports: **GB12BS, GBS**

A000028700 - Complete telescopic mast (2 pc.) assembly that fits: GB12BW, GBW, GBC, GB3LED, GB8LED

Stand Replacement

GBWSTAND

complete 5-point pent-a-pod stand that fits GloBug models: GBP, GB8LEDB



A000019600

complete 3-point tripod stand that fits GloBug models: GB12BP, GB3LEDB



Cart Replacement



Hanging Kit



Provides the balloon and hardware to orient the GloBug lamp to be suspended from above. Fits: GBW, GBC, GBS, GBP, GB12BW, GB12BP, GB12BS, GB3LED, GB3LEDB, GB8LED, GB8LEDB

A000034400 - Hanging Kit hardware and fasteners

A100086400 - Hanging Kit balloon bag

Balloon Message Strips



Personalized Message Strips are available at your request. They can highlight the particular application, support the job site, or enhance your business's exposure. **Contact Multiquip Sales** for information on standard or personalized value added message strips that can include company logos, event definition, or special occasion.

Message Strips easily velcro to fit balloons: GB12BW, GB3LED, GB12BP – $9" \times 31"$ strip GBW, GBP, GBC, GBS, GB8LED – $12" \times 43"$ strip GB36S – $36" \times 36"$ strip GB48 – $48" \times 48"$ strip GB2000 – $24" \times 43"$ GB4000 – $26" \times 54"$

Your Multiquip dealer is:

Connect with us on









