




SEV-50X

PERFORMANCE CURVES

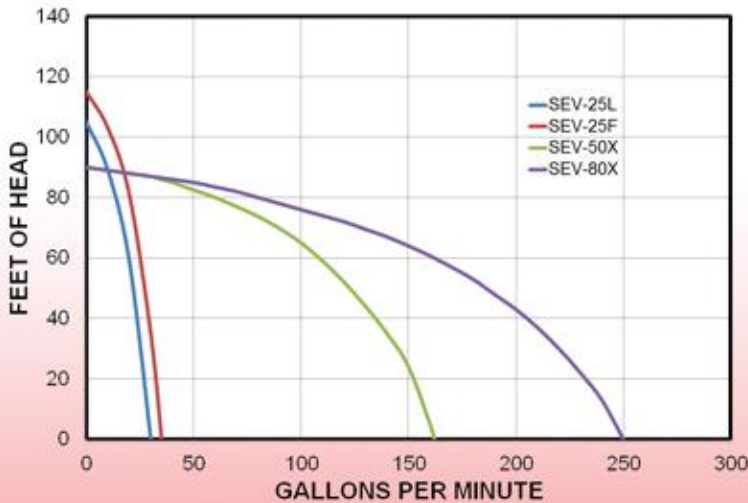

Outstanding Features

- Impellers and Volutes are Constructed of Cast Iron for Durability, and Long Operating Life (Engine Pumps Larger than 1" NPT)
- Pump Housings are Made of Die Cast Aluminum for Strength, Weight Reduction, and Portability
- Strong Transport Protection Powder Coated Steel Roll Cages (Engine Pumps 2" or Larger)
- Reliable **KOSHIN** Engines with Low Oil Shut Off (Engine Pumps 2" or Larger)
- Self Priming up to 26', and a Maximum Head up to 105'
- Two Year Limited Warranty Engines and Pumps



SEV-80X



SEV-25F

SEV-25L

	SEV-25L	SEV-25F	SEV-50X	SEV-80X
Suction, Discharge Size	1" NPT	1" NPT	2" NPT	3" NPT
Maximum Output (GPM)	29	35	163	246
Maximum Discharge Head (ft)	105	115	90	90
Maximum Suction Lift (ft)	26	26	26	26
Maximum Pressure (Psi)	46	50	39	39
Engine Model	KC26	K35	K180	K180
Engine Displacement (cc)	26	35	179	179
Engine Horse Power	0.93	1.1	4.7	4.7
Fuel Tank Capacity (Gal)	0.12	0.19	0.95	0.95
Full Load Run Time (hrs)	0.83	1	2	2
Fuel Type	2 Cycle 50:1	Unleaded Automotive Gasoline		
Packaged Weight (Lbs)	16	22	56	70
Packaged Dimensions (LxWxH)	15"x10"x13"	16"x11"x15"	20"x17"x19"	21"x17"x19"