

APR 58/75

REVERSIBLE VIBRATORY PLATE

APPLICATIONS

- Earthwork and paving applications
- Road and rail track construction
- Compaction work in narrow trenches, confined areas
- Landscape and gardening
- Foundation work
- Sensitive surfaces (with optional rubber mats for stone protection)



A PERFORMER ON STEEP GRADES

The APR 58/75 features good manoeuvrability and optimum power to help with climbing and, ultimately, compaction. The machine performs at grades up to 30 %. Working widths of 450 mm (17.7 in) can be broadened with extensions of 75 mm (3 in) and 150 mm (5.9 in). Engine unit is protected by a robust frame that offers wide openings for great accessibility when servicing the machine.

INNOVATIVE HANDLE

- The low vibration handle reduce stress on the operator.
- Round handle for optimized grip for all individual operator.

MAKES THE GRADE

- Overcomes grades of 30 %.
- Remains fastest machine on the market.

READY TO RENT

- Low-cost upkeep.
- Good match for many applications.
- Easy for new users to operate.

TWIN-SHAFT EXCITER UNIT

- Shaft positioning enables the operator to easily change directions.
- Smooth variable hydrostatic unit allows machine to move easily in forward and reverse.
- "On-the-spot" vibration can be utilised in particularly challenging areas.

DURABLE

- Well-protected, robust centrifugal clutch with wear-resistant V belt.
- Service-friendly exciter unit with long lifetime.
- Fresh air suction behind the machine leads to longer lifetime.

OPTIONAL TECHNOLOGY

- ACE continuously measures and monitors the compaction level.


STANDARD EQUIPMENT

- Sturdy protection frame with central lifting point
- Powerful and reliable petrol or diesel engine
- 2-shaft exciter with long service intervals
- Well protected, sturdy centrifugal clutch with wear resistant V-Belt
- 3 year extended warranty program
- E-start (Diesel engine)

OPTIONAL EQUIPMENT

- Bolted paving pad for applications on paving stones
- Hour meter
- Extension plates
- ACE

TECHNICAL SPECIFICATIONS
APR 58/75 REVERSIBLE VIBRATORY PLATE

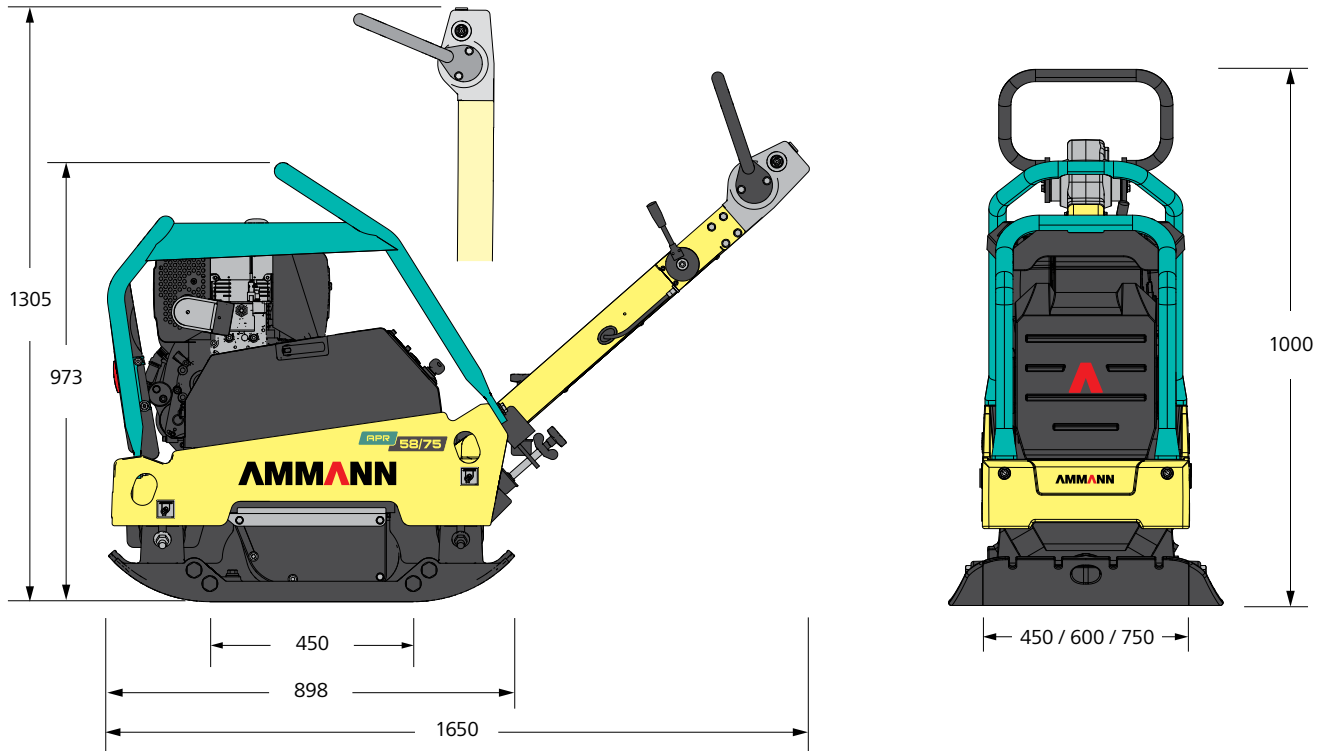

Measurements in mm

WEIGHTS & DIMENSIONS

	HONDA	HATZ E-Start	HATZ E-Start EPA	HATZ (DPF) E-Start EPA
MACHINE WEIGHT	417.6 kg (921 lb)	450 kg (992 lb)	453 kg (998 lb)	457 kg (1007 lb)
WITH EXTENSION PLATES 75 MM (3 IN) + OPTIONS	446.6 kg (985 lb)	480 kg (1058 lb)	482.8 kg (1064 lb)	486.8 kg (1073 lb)
WITH EXTENSION PLATES 150 MM (5.9 IN) + OPTIONS	466.6 kg (1029 lb)	500 kg (1102 lb)	502.8 kg (1108 lb)	506.8 kg (1117 lb)
BASE PLATE LENGTH	450 mm (17.7 in)			
MACHINE LENGTH	898 mm (35.4 in)			
WITH HANDLE	1650 mm (65 in)			
MACHINE HEIGHT	973 mm (38.3 in)			
HANDLE HEIGHT (WORK)	1000 mm (39.4 in)			
HANDLE HEIGHT (TRANSPORT)	1305 mm (51.4 in)			
MACHINE WIDTH	450 / 600 / 750 mm (17.7 / 23.6 / 29.5 in)			

ENGINE

	HONDA	HATZ E-Start	HATZ E-Start EPA	HATZ (DPF) E-Start EPA
ENGINE	GX390	1B40	1B50E	1B50E (DPF)
FUEL	Petrol	Diesel	Diesel	Diesel
ENGINE OUTPUT	8.2 kW (11 HP)	6.8 kW (9.1 HP)	7.6 kW (10.2 HP)	7.6 kW (10.2 HP)
AT RPM	3000	2900	3000	3000
FUEL CONSUMPTION	3 l/h (0.8 gal/h)	1.6 l/h (0.4 gal/h)	1.6 l/h (0.4 gal/h)	1.6 l/h (0.4 gal/h)

COMPACTION FORCES

MAX. VIBRATION FREQUENCY	65 Hz (3900 rpm)
MAX. CENTRIFUGAL FORCE	58 kN (13039 lbf)
MAX. WORKING SURFACE	1305 m ² /h (14047 ft ² /h)
SPECIFIC SURFACE PRESSURE	28.6 N/cm ² (41.5 psi)

MISCELLANEOUS

SPEED	29 m/min (1.1 mph)
GRADEABILITY	30%
FUEL CAPACITY	6.1 l (1.6 gal) 5 l (1.3 gal) 5 l (1.3 gal) 5 l (1.3 gal)
MAX. INCLINE	25°



www.discount-equipment.com



Materials and specification data are subject to change without notice.
MSS-3250-00-EN | © Ammann Group

TO PURCHASE THIS PRODUCT PLEASE CONTACT US



**Equipment Financing and
Extended Warranties Available**



**Discount-Equipment.com is your online resource for
commercial and industrial quality parts and equipment sales.**

561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar