

The APF 10/33 is the lightest and smallest of all Ammann Vibratory Plate Compactors. Its size makes it ideally suited to small jobsites and confined areas. This forward-moving plate compactor is often utilised by landscape contractors to reach hard-to-access spots. Homeowners also use the APF 10/33 because of its manageable size. The standard guide handle and its vibration isolation improve operator comfort. When the job is finished, the compactor is small enough to fit in the trunk of a car.

EFFECTIVE

COMPACTION TOOL

- Powerful petrol engine.
- Engine power transmitted to the exciter system through a centrifugal clutch and V belt.
- Optional water sprinkler system for work on bituminous surfaces.

LIMITED MAINTENANCE

- Well-protected, robust centrifugal clutch with wear-resistant V belt.
- Service-friendly exciter unit with long lifetime.
- Wear-resistant, self-cleaning base plate.

READY TO RENT

- · Low-cost upkeep.
- Good match for many applications.
- Easy for new users to operate.


INNOVATIVE HANDLE

- Vibration-isolated to reduce stress on the operator
- Foldable and removable, crucial attributes when working in confined areas or during transport.

APPLICATIONS

- Compaction in confined areas
- Earthwork
- Asphalt and paving applications
- Light to medium patchwork
- Pipeline and trench construction
- Landscaping and gardening



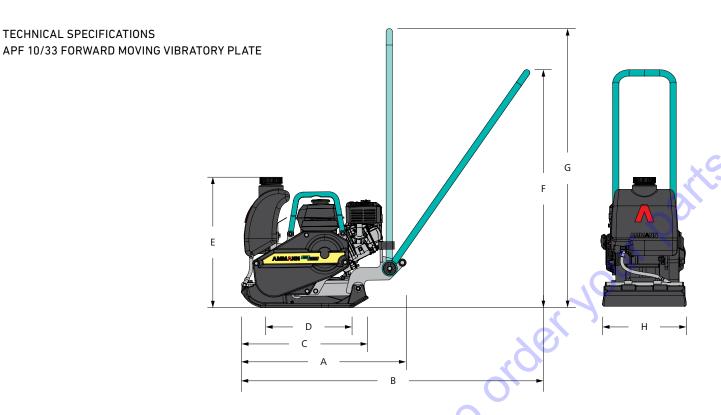

DIMENSIONS & WEIGHTS

MACHINE WEIGHT		55 kg (121 lb)
MACHINE WEIGHT (INCL. OPTIONAL SPRINKLER & WHEELS)		58 kg (128 lb)
Α	MACHINE LENGTH	655 mm (25.8 in)
В	MACHINE LENGHT WITH HANDLE	1130 mm (44.5 in)
С	BASE PLATE LENGTH	495 mm (19.5 in)
D	GROUND CONTACT LENGTH	341 mm (13.4 in)
Е	MACHINE HEIGHT	507 mm (20 in)
F	WITH HANDLE (WORK)	932 mm (36.7 in)
G	WITH HANDLE (TRANSPORT)	1100 mm (43.3 in)
Н	MACHINE WIDTH	330 mm (13.0 in)

ENGINE

ENGINE		B&S XR 550
FUEL		Petrol
ENGINE OUTPUT AT RPM	CO	2.6 kW (3.5 HP) 3600



www.discount-equipment.com

COMPACTION FORCES

MAX. VIBRATION FREQUENCY	100 Hz (6000 vpm)
MAX. CENTRIFUGAL FORCE	10.5 kN (2360 lbf)
WORKING SURFACE	435.6 m ² /h (4689 ft ² /h)
SPEC SURFACE PRESSURE	9.3 N/cm² (13.5 nsi)

MISCELLANEOUS

SPEED	0-22 m/min (0-72.2 ft/min)
GRADEABILITY	30%
MAX INCLINE TO ALL SIDES	20°

STANDARD

- Standard vibration isolated guide handle
- Central lifting point
- Powerful and reliable petrol engine
- Service friendly exciter unit with expanded life expectancy
- Well protected, sturdy certrifugal clutch and V-Belt

OPTIONAL EQUIPMENT

- Corrosion free water tank (5 litres / 1,3 gallon) and sprinkler system for application on bituminous surfaces
- 3 year extended Warranty Program



TO PURCHASE THIS PRODUCT PLEASE CONTACT US



Equipment Financing and Extended Warranties Available



Discount-Equipment.com is your online resource for commercial and industrial quality parts and equipment sales. 561-964-4949
visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar