

THE
BARRETO**MODEL 1025TKL TRACK LOADER**
HYDRAULIC TRACK LOADER
OPERATOR'S MANUAL – ORIGINAL INSTRUCTIONS**MACHINE INTENDED USE**

This Track Loader is designed to attach to industry-standard tools and implements for light and medium duty construction and landscaping work.

TABLE OF CONTENTS

UNIT OVERVIEW SPECS AND DIMENSIONS	2
KEY COMPONENTS	5
GREASE POINTS	5
HYDRAULIC SCHEMATIC	6
SAFETY MESSAGES	7
SAFETY INSTRUCTIONS OVERVIEW	8
BATTERY & ELECTRIC STARTER SAFETY INSTRUCTIONS	10
MACHINE OPERATING INSTRUCTIONS	11
CONTROLS	11
ENGINE START UP PROCEDURE	12
SHUT DOWN PROCEDURE	12
DRIVING PROCEDURE	13
ATTACHMENTS	14
TOOL OPERATION	15
JUMP STARTING ENGINE WITH ELECTRIC STARTER	16
EMERGENCY TOWING	17
DISABLE BRAKE DRAWING	18
BYPASS SCREWS DRAWING	19
ROAD TRANSPORT	20
OPERATOR PREPARATION	21
DETERMINE LOCATION OF UNDERGROUND UTILITIES	22
WORK SITE ASSESSMENT	23
CONTACT WITH UNDERGROUND UTILITIES	24

PARTS FINDER

**Search Website
by Part Number**



**Search Manual
Library For Parts
Manual & Lookup Part
Numbers – Purchase
or Request Quote**

Search Manuals

Enter your information to help us find the right parts manual for your machine.

* Brand:

* Model:

* Serial:

* Part Number:

SEARCH

**Can't Find Part or
Manual? Request Help
by Manufacturer,
Model & Description**

Parts Order Form

Please fill in the following information to help us find the right part for your machine.

MANUFACTURER:

MODEL:

DESCRIPTION:

SEARCH

Discount-Equipment.com is your online resource for quality parts & equipment.

Florida: **561-964-4949** Outside Florida TOLL FREE: **877-690-3101**

Need parts?

Click on this link: <http://www.discount-equipment.com/category/5443-parts/> and choose one of the options to help get the right parts and equipment you are looking for. Please have the machine model and serial number available in order to help us get you the correct parts. If you don't find the part on the website or on one of the online manuals, please fill out the request form and one of our experienced staff members will get back to you with a quote for the right part that your machine needs.

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar

UNIT OVERVIEW: SPECS & DIMENSIONS 1025TKL ORIENTATION

	US	METRIC
DIMENSIONS		
Operating height, max, std. bucket	105.75"	2.68 m
Overall Length, std. bucket	106.5"	2.7 m
Overall length of loader, no attachment	80.12"	2.04 m
Weight (no attachment, fluids full)	3,294 lbs.	1,494.1 kg
Hinge pin height, max	80"	2.03 m
Track Length – Idler Centers	39.12"	1 m
Outside Track Width		
7" tracks (180 mm)	34.6"	.88 m
9" tracks (230 mm)	36.6"	.93 m
Ground clearance	7.25 in	184 mm
Tipping capacity	2,790 lbs.	1,265.5 kg
Rated operating capacity		
35% of tipping capacity	976.5 lbs.	442.93 kg
Angle of departure	28°	28°
POWER		
Engine	Kubota D1105	Kubota D1105
Fuel	Diesel	Diesel
Net power rating	25 hp	25 hp
Emission compliance	EPA Tier 4	EPA Tier 4
Number of cylinders	3	3
Displacement	68.5 ci	1123 cc
Bore	3.07"	78 mm
Stroke	3.09 in	78.4 mm
Rated Speed	3000 rpm	3000 rpm

UNIT OVERVIEW: SPECS & DIMENSIONS


1025TKL ORIENTATION (continued)

	US	METRIC
HYDRAULIC SYSTEM		
Auxiliary circuit		
Tandem gear pump		
Flow rate (Pump #1)	13 gpm	49 lpm
Flow rate (Pump #2)	6.5 gpm	24.6 lpm
Pressure relief (Pump #1)	3000 psi	207 bar
Pressure relief (Pump #2)	1750 psi	120 bar
Tandem Hydrostatic ground drive pumps		
Flow rate	14 gpm	54 lpm
Pressure relief	3045 psi	210 bar
FLUID CAPACITIES		
Fuel	9 gal	34 ltr
Engine oil with filter	5 qt	4.7 ltr
Hydraulic reservoir	10.8 gal	40.9 ltr
OPERATION		
Ground drive speed		
Forward	5.1 mph	7.2 kmh
Reverse	3.6 mph	5.8 kmh
Ground pressure*	3,294 lbs.	1,494.1 kg
7" tracks (180 mm)	6.0 psi	41.4 kPa
9" tracks (230 mm)	4.7 psi	32.4 kPa
<p><i>*Includes machine weight, 175 lb. bucket (30 kg) and 165 lb. operator (75 kg).</i></p> <p><i>Specifications are subject to change without notice. If exact measurements are required, equipment should be weighed and measured. Due to selected options delivered, equipment may not necessarily match that shown.</i></p>		

FRONT

LEFT
SIDE


RIGHT
SIDE

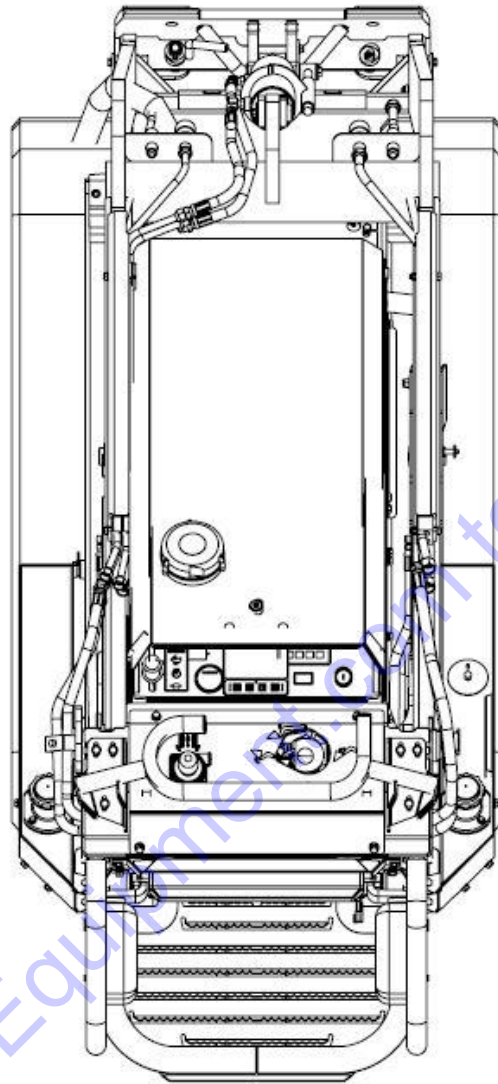

BACK


Go to Discount-Equipment.com to order your parts

KEY COMPONENTS

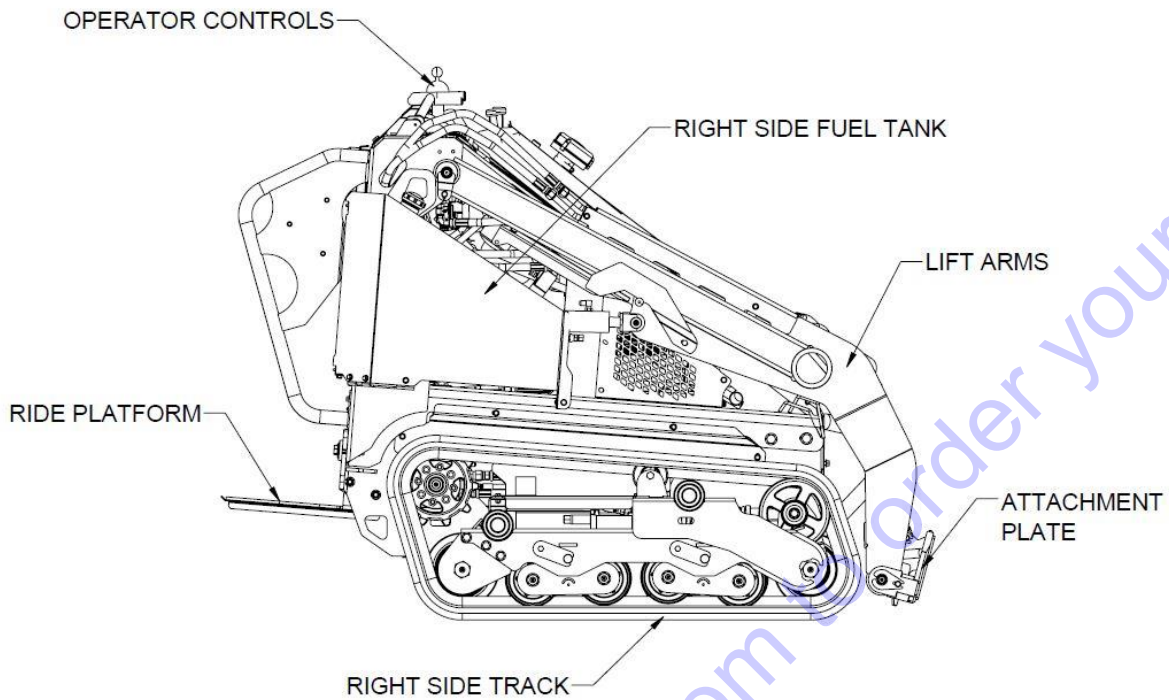


GREASE POINTS

GREASE POINTS, EVERY 10 HOURS OPERATION

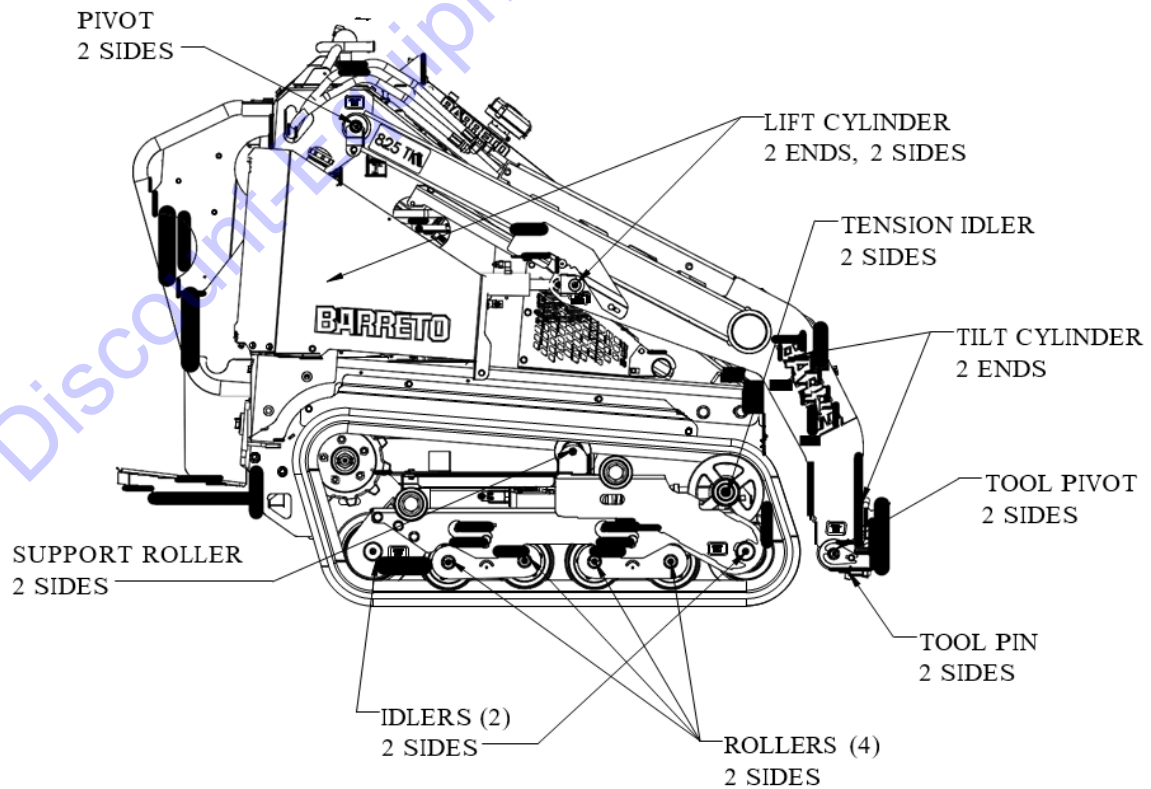

HYDRAULIC SCHEMATIC

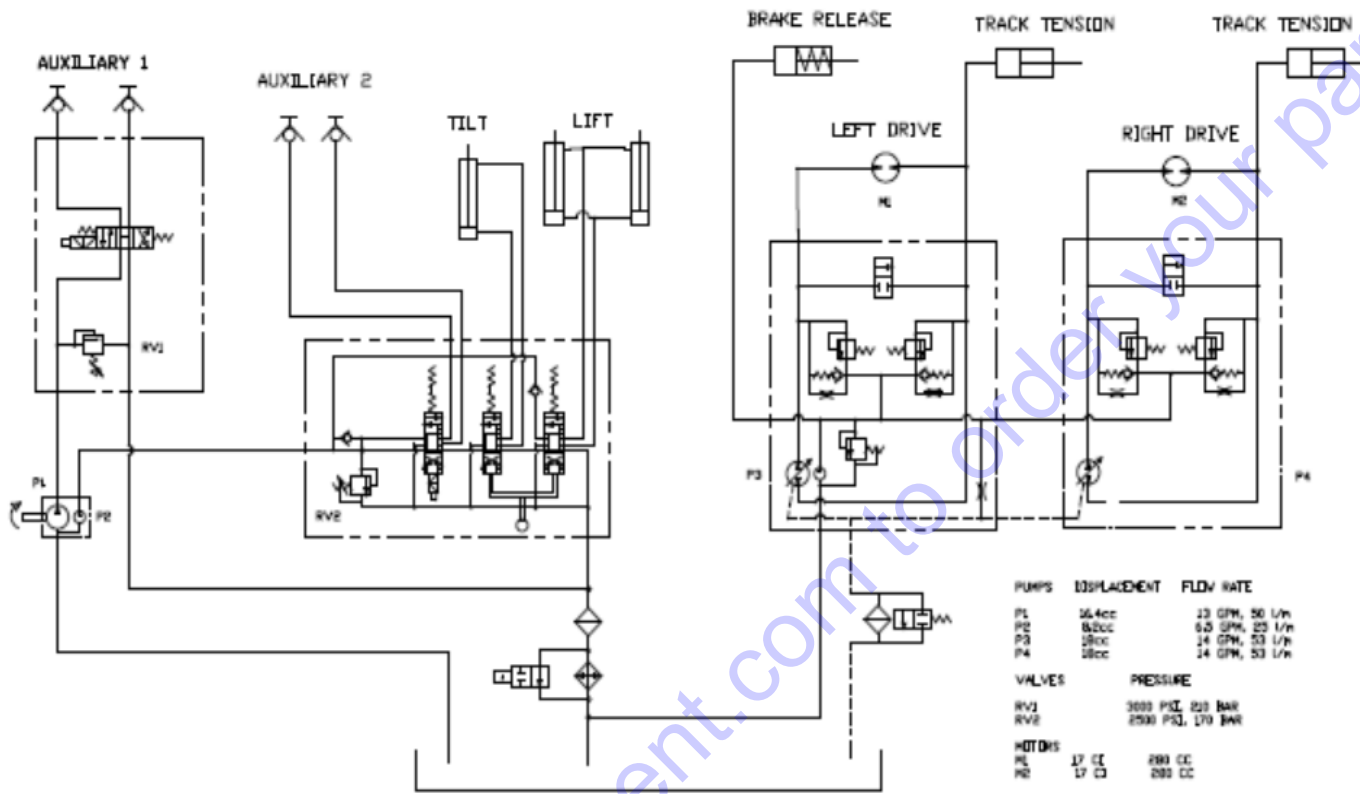

SAFETY MESSAGES

General safety messages are listed in this Safety Messages section. Specific safety messages appear as appropriate in this manual where a potential hazard may occur if procedures or instructions are not followed correctly and completely.

SAFETY SYMBOL



This is the international safety alert symbol. This symbol is used in combination with a signal word and written message to warn you of a potential for bodily injury or death.

A signal word "DANGER", "WARNING", or "CAUTION" is used with the safety alert symbol.



DANGER: Imminent hazards, that if not avoided, will result in serious personal injury or death.



WARNING: Potential hazards or unsafe practices, that if not avoided, could result in serious personal injury or death:



CAUTION: Potential hazards or unsafe practices, that if not avoided, could result in minor personal injury, product damage, or property damage.

Safety decals with a signal word "DANGER", "WARNING", or "CAUTION" are affixed to the 1025TKL near specific hazards.

This machine is intended for the operator to stand on. If at any time it becomes unsafe, the operator must step off immediately.

Read this manual and study ALL decals on the machine before operating the 1025TKL.



SAFETY INSTRUCTIONS OVERVIEW

READ SAFETY AND OPERATING INSTRUCTIONS BEFORE OPERATING!

USE COMMON SENSE AND PLENTY OF IT!

Call before you dig. If you do not call, you may cause an accident; suffer injuries or death; cause interruption of services; damage the environment; and/or incur project delays. Expect to be held liable for any damages caused, if you fail to call.



DANGER: Buried electric cables or gas lines can cause severe injury or death if struck with trenching attachments. Always determine location of utilities before trenching.



WARNING: Fiber optic cables convey laser light that can injure your eyesight.

STAY CLEAR of moving parts on the machine.



DANGER: Track Loader attachments and other moving parts can cut off arms, legs, or fingers. Contact with attachments while in operation will cause severe injury or even death.



Wear safety goggles and a hard hat while operating or observing!

Wear adequate hearing protection while operating or observing.



WARNING: Exposure to loud noise is cumulative and may permanently damage your hearing.



Wear safety boots and gloves. Wear close-fitting clothing. Contain long hair. Do not wear jewelry. Wear reflective clothing if working near traffic.

Only operate outdoors and avoid breathing engine exhaust and fumes.




WARNING: Engine exhaust contains carbon monoxide gas that is toxic. Breathing it can cause unconsciousness and death.

Adequate lighting is required, daylight or artificial, for the safe operation of the 1025TKL.

Allow adequate side and overhead clearances between the 1025TKL and buildings, fences, and trees.


SAFETY INSTRUCTIONS OVERVIEW (continued)

Avoid inclines, if at all possible.


 **WARNING:** Navigating on any incline increases the danger of the 1025TKL losing traction or rolling over, especially if the surface is wet. If you lose control, step off immediately to avoid personal injury. Navigation on inclines should be especially slow and turns very gradual. Refer to the incline diagram in the section, “GROUND TRANSPORT.”

Avoid operating adjacent to drop-offs or embankments.

Keep away from tracks to avoid getting crushed.


 **WARNING:** Getting run over by the Track Loader will cause injury.

Always leave the 1025TKL parked on a level surface.


 **WARNING:** Do not park on an incline. Move the 1025TKL to a level surface and set the parking brake located behind the left-hand track motor. Move the handle down to engage the brake.

Do not leave 1025TKL unattended with the engine running.


Do not operate the 1025TKL near any source of flammable dust or vapors.

 **WARNING:** Sparks from the engine exhaust can cause an explosion or fire in a flammable or explosive atmosphere. Fuel fumes can catch fire or explode.


Do not operate the 1025TKL near flames or sparks.

 **WARNING:** Fuel fumes can catch fire or explode.

Shut off engine and allow it to cool before refueling.

 **WARNING:** Fuel fumes can catch fire or explode. Do not smoke when refueling. Do not refuel near a source flames or sparks.

Do not touch the engine, muffler, or any of the hydraulic components until cool.

 **WARNING:** Muffler and engine get hot enough to cause serious burns. For the safety of yourself and others, allow enough time for the engine, muffler, and the hydraulic fluid to cool completely before performing any cleaning or maintenance.

SAFETY INSTRUCTIONS OVERVIEW (continued)

Avoid contact with hydraulic fluid.



WARNING: When the machine is operating, hydraulic fluid is under extreme pressure and can get under skin and burn or poison.

Keep others away. If the job site is near a road or pedestrian path, warn and divert both motorized traffic and pedestrians. As appropriate, use traffic flag personnel, signs, cones, and lighting devices to ensure safety.

Only the operator is allowed to stand on the 1025TKL.

Never lift the 1025TKL over any person at any time.



WARNING: If unit should fall it would crush anybody under it.

We recommend having a fire extinguisher suitable for petrol fires in the operating area.

Attachments can change the center of mass and machine operations.

BATTERY & ELECTRIC STARTER SAFETY INSTRUCTIONS

Shield your entire face, especially your eyes, and wear rubber gloves to avoid acid burns whenever doing anything with the battery. Battery caps must be tightly in place if the battery has removable caps.



WARNING: The battery contains sulfuric acid that can cause blindness and severe burns. Avoid contact with eyes, skin, and clothing. If acid contacts eyes, call 911 immediately and flush eyes with water for 15 minutes or until emergency medical help arrives. If acid contacts skin, flush area with plenty of water. If acid is ingested, drink large quantities of water or milk then follow with milk of magnesia, beaten egg, or vegetable oil, and get medical attention immediately.

Avoid contact with battery components. Wear rubber gloves and wash hands after handling any battery components.



WARNING: Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to cause cancer and reproductive harm. Acid can cause blindness and severe burns if leaked from the battery.

Do not charge or jump-start the battery near flames or sparks, or while smoking.



WARNING: Battery fumes are flammable and explosive. Avoid explosion hazard that could blind and burn. Tools and jumper cable clamps can make sparks, so use them with care. Shield eyes and face, and wear rubber gloves.

BATTERY MAINTENANCE is in the OWNER'S MANUAL.


1025TKL OPERATING INSTRUCTIONS

READ SAFETY INSTRUCTIONS BEFORE OPERATING! Both the SAFETY INSTRUCTIONS and OPERATING INSTRUCTIONS are in this manual.

Be sure that the engine oil and fuel, and the machine hydraulic fluid are all at proper levels before starting the engine.

STUDY AND UNDERSTAND CONTROLS BEFORE BEGINNING OPERATION.

CONTROLS

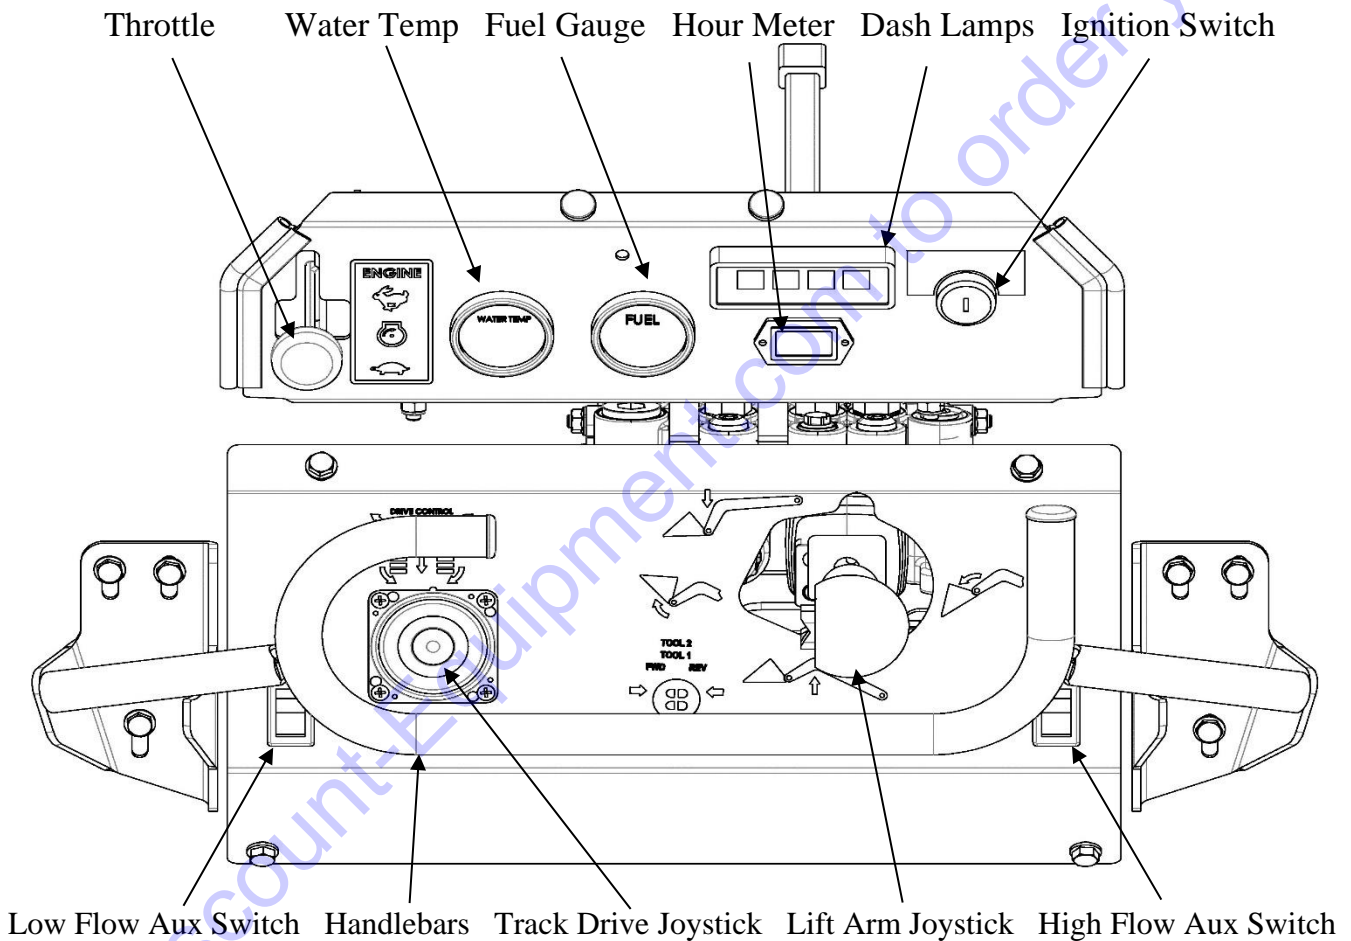

ENGINE START UP PROCEDURE

1. Insert key into ignition.
2. Set throttle at low idle.
3. Turn key to the glow setting, this will activate the glow light. The glow plugs will warm for six seconds and then the glow light will shut off.
4. Turn key to “START” position to engage starter. Engine should fire within a few seconds. Do not run the starter more than 20 seconds at a time. This may damage the starter motor.
5. Warm up the engine at a medium idle without load

Check to make sure the oil pressure light goes off. If the oil pressure light remains on, turn the engine off immediately and determine the cause.

ENGINE SHUT DOWN PROCEDURE

1. Return the speed control lever to idle.
2. Turn the key off.

Allow engine to cool before refueling.



WARNING: Fuel fumes can catch fire or explode. Do not smoke or allow flames or sparks in the area.

Do not touch the engine, muffler, or any of the hydraulic components until cool.



WARNING: Muffler and engine get hot enough to cause serious burns. For the safety of yourself and others, allow enough time for the engine, muffler, and the hydraulic fluid to cool completely before performing any cleaning or maintenance.



See the Engine Manual from Kubota included with the machine for more engine instructions.

Only operate the 1025TKL outdoors and avoid breathing engine exhaust and fumes.

COLD WEATHER OPERATIONS: Before operating in cold weather, refer to the Engine Owner’s Manual for recommended engine oil. Do not spray starting fluid into the air cleaner as engine damage could result. If the machine is operated at temperatures below +32°F (0°C) then changing the hydraulic fluid to ISO 46 is recommended. If you do not want to change the hydraulic fluid but want to operate the machine at temperatures below +32°F (0°C), then do the following:

- Warm up engine at a low speed.
 - Gradually increase engine speed, allowing **30 minutes for the hydraulic fluid to warm up.**
- Reduce the engine speed if the hydraulic pump whines. Pump noise may indicate a lack of hydraulic fluid flow that could damage the pump.

For frequent starts below 18°F consult your Barreto Manufacturing, Inc. dealer.


DRIVING PROCEDURE

1. Follow engine start up procedure.
2. Securely grasp the handle surrounding the control levers.
3. The left-hand lever controls the track system and speed. Increasing the lever movement forward or backwards will increase the speed of the unit.
4. Moving the left-hand lever left or right will drive the tracks in that direction.
5. The right lever controls the lift arms and tilt of the attachment plate. Pulling the lever back will raise the arms, pushing forward will lower the arms. Moving the lever left will tilt the attachment plate upward, moving it to the right will tilt the attachment plate downward or away from the operator.
6. Pushing the right-hand lever fully forward will enable the float action of the lift arms, allowing the attachment to follow the contour of the ground.

NOTE: The 1025TKL ride platform contains an Operator Presence Switch which will disable the tool function and the drive function if the operator steps off the platform. The operator must be standing on the platform for all driving and tool functions to operate.

OPERATIONAL INCLINES


Do not operate the 1025TKL on a side hill greater than 20°. Doing so may cause the unit to tip over and cause damage to the operator and machine.

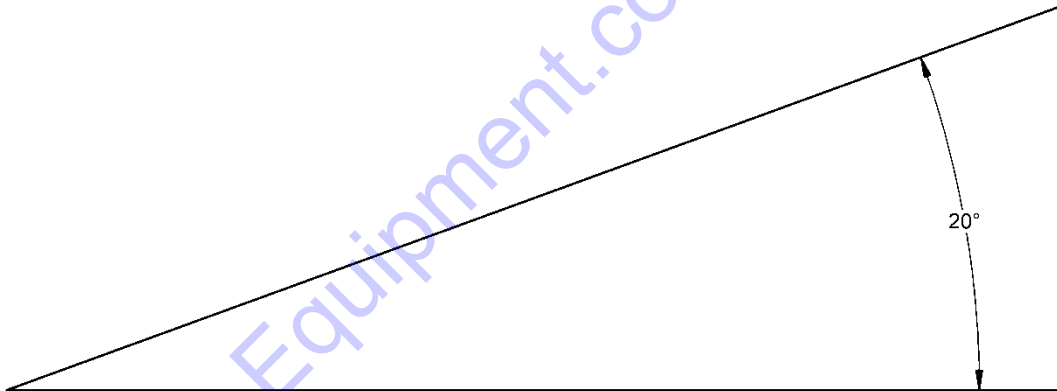


ATTACHMENTS

The 1025TKL is designed to use a wide variety of industry-standard attachments from multiple manufacturers. The attachment system consists of a mount plate connected to the lift arms at the front of the machine. This plate also contains two lock pins to prevent the attachment from disconnecting while in use.


ROTATE PINS TOWARD MACHINE
TO UNLOCK ATTACHMENT

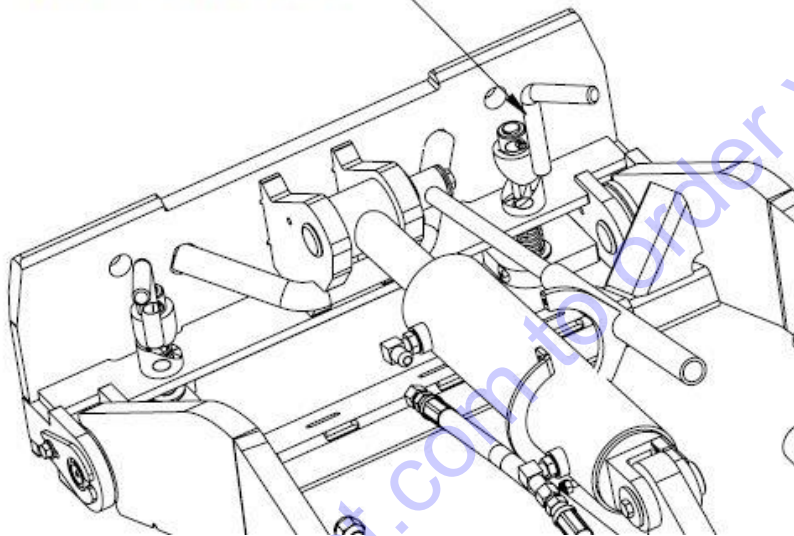

To connect to an attachment, tilt the attachment plate down toward the desired tool and drive the attachment plate into the pocket on the attachment. Once the attachment plate is fitted to the pocket, tilt the attachment plate upward until the plate fully rests against the tool. Lock the two lock pins in place using the levers attached to the lock pins. Once the attachment is fully secured, return to the ride platform.

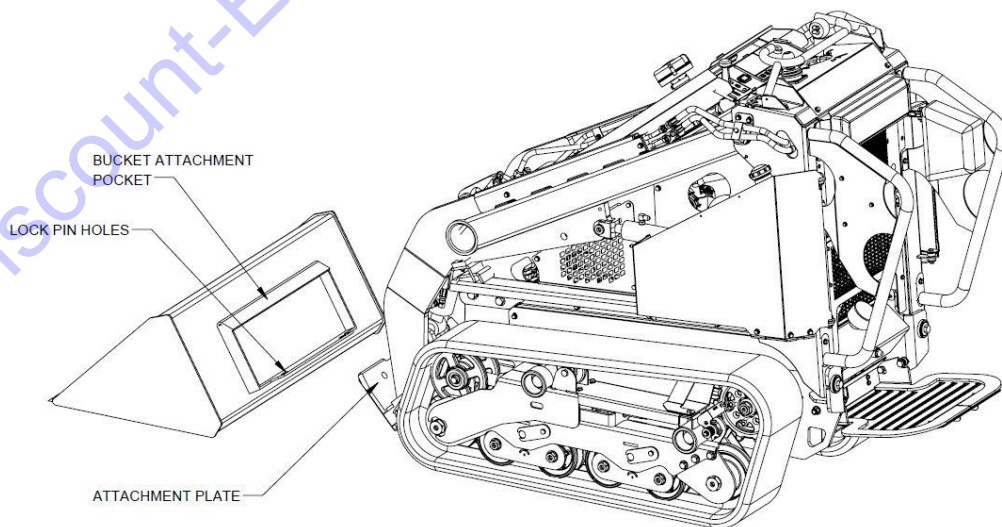

TOOL HOSE ATTACHMENT

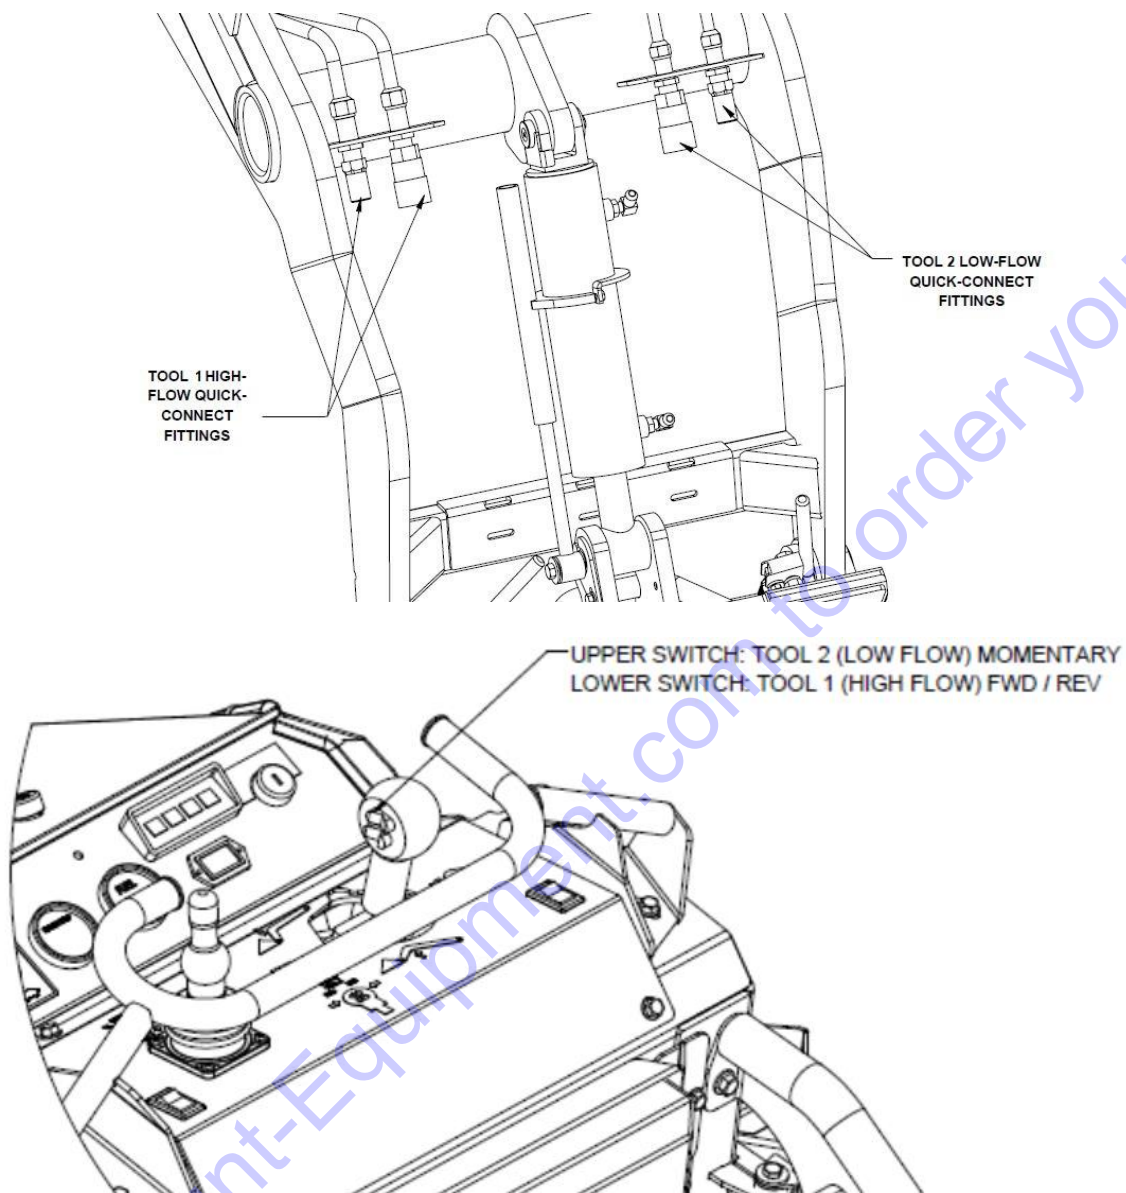

LOW FLOW ATTACHMENTS (LF Tool, Tool 2)- Attachments with Grapples or smaller, secondary cylinders will use the Low-Flow Auxiliary quick-connect fittings.

To enable, press the “**LF Tool**” button on the left side of the display panel. This will allow the operator to use the Low-Flow Auxiliary lines. The lift arm joystick has two buttons controlled by the operator’s right thumb. The upper button controls TOOL 2. The operator can then switch the tool flow forward or reverse. The TOOL 2 switch can be pressed FWD or REV but will spring to OFF when not pressed.


NOTE: If the operator steps off the ride platform, the operator must press the “**LF Tool**” button again to enable the tool. The presence switch on the ride platform will disable the tool function if the operator steps off the platform.

HIGH-FLOW ATTACHMENTS (HF Tool, Tool 1)- Tools such as Augers, Mowers and similar attachments will have a hydraulic motor. These attachments will need to be attached to the High-Flow auxiliary quick-connect fittings on the right side of the lift arms.

To enable **TOOL 1**, press the “**HF Tool**” button on the right side of the display panel. This will allow the operator to use the High-Flow Auxiliary lines. The lift arm joystick has two buttons controlled by the operator’s right thumb. The lower button controls TOOL 2. The operator can then switch the tool flow forward or reverse. The TOOL 1 switch will stay locked in FWD, REV or OFF when not pressed.

NOTE: If the operator steps off the ride platform, the operator must press the “**HF Tool**” button again to enable the tool. The presence switch on the ride platform will disable the tool function if operator steps off the platform.

JUMP STARTING ENGINE WITH ELECTRIC STARTER

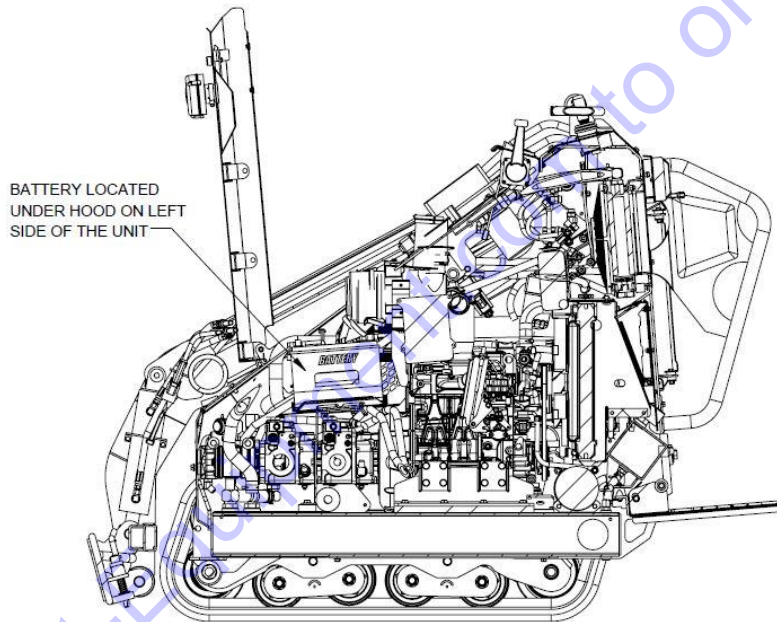

Shield your entire face, especially your eyes, and wear rubber gloves to avoid acid burns whenever doing anything with the battery. Battery caps must be tightly in place if the battery has removable caps.

⚠️ WARNING: The battery contains sulfuric acid that can cause blindness and severe burns. Avoid contact with eyes, skin, and clothing. If acid contacts eyes, call 911 immediately and flush eyes with water for 15 minutes or until emergency medical help arrives. If acid contacts skin, flush area with plenty of water. If acid is ingested, drink large quantities of water or milk then follow with milk of magnesia, beaten egg, or vegetable oil, and get medical attention immediately.

Avoid contact with battery components. Wear rubber gloves and wash hands after handling any battery components.

⚠️ WARNING: Battery posts, terminals, and related accessories contain lead and lead compounds, chemicals known to cause cancer and reproductive harm. Acid can cause blindness and severe burns if leaked from the battery.

Do not jump start the battery near flames or sparks, or while smoking.



WARNING: Battery fumes are flammable and explosive. Avoid explosion hazard that could blind and burn. Tools and jumper cable clamps can make sparks, so use them with care. Shield eyes and face, and wear rubber gloves.

Do not jump-start or charge a battery that is frozen or low on electrolyte.

IMPORTANT: Use only a 12-volt system for jump-starting. Never allow the vehicle used to jump-start to contact the disabled machine. If the vehicles contact, a spark may occur when the positive jumper cable is connected or disconnected. If equipped with battery caps, they must be in place and tight to reduce the risk of battery explosion.

JUMP STARTING PROCEDURE:

1. Turn ignition switch to OFF. Open engine hood to expose battery location.
2. Connect jumper cables in the following order:
 - a) Clamp one RED cable end to the discharged battery POSITIVE (+) terminal.
 - b) Clamp the other end of the RED cable to the booster battery POSITIVE (+) terminal.
 - c) Clamp one BLACK cable end to the booster battery NEGATIVE (-) terminal.
 - d) Clamp the other end of the BLACK cable to the frame of machine with the discharged battery, away from battery.
3. Start the engine.
4. Disconnect the cables in reverse order of connection and cover each jumper cable terminal. To avoid sparks near the battery, never disconnect the red jumper cable without first disconnecting the black jumper.

EMERGENCY TOWING

In case of engine failure there is a provision that allows the 1025TKL to be towed a short distance.

The 1025TKL tracks are driven by a set of tandem hydrostatic pumps. The front pump drives right track, and the other pump drives left track. The drive pump bypass valves may be opened to allow the machine to be towed.

- If on a slope, chock the tracks to prevent rolling.




WARNING: Navigating on any slope increases the danger of the 1025TKL losing traction or rolling over, especially if the surface is wet. Stay out of the way to avoid personal injury.

- Disable parking lock on left drive sprocket (see illustration pg. 21).
- Loosen bypass screws 2 turns (do not remove) (see illustration pg. 22).
- The machine may be towed a short distance (1/8-mile, 1/4 km max) at slow speed, 2 mph or 200 feet per minute max (3 kph or 60 meters per minute)
- Use a trailer or truck for transport.
- After towing, tighten both bypass screws 10 ft-lb (13 Nm)


RELEASE DATE	XXXXXXXXXX
REVISED DATE	NEW
REVISION #	0

COVER REMOVED TO SHOW
PARKING LOCK

REMOVE CLEVIS PIN
SECURE HOOK AWAY FROM
SPROCKET TEETH

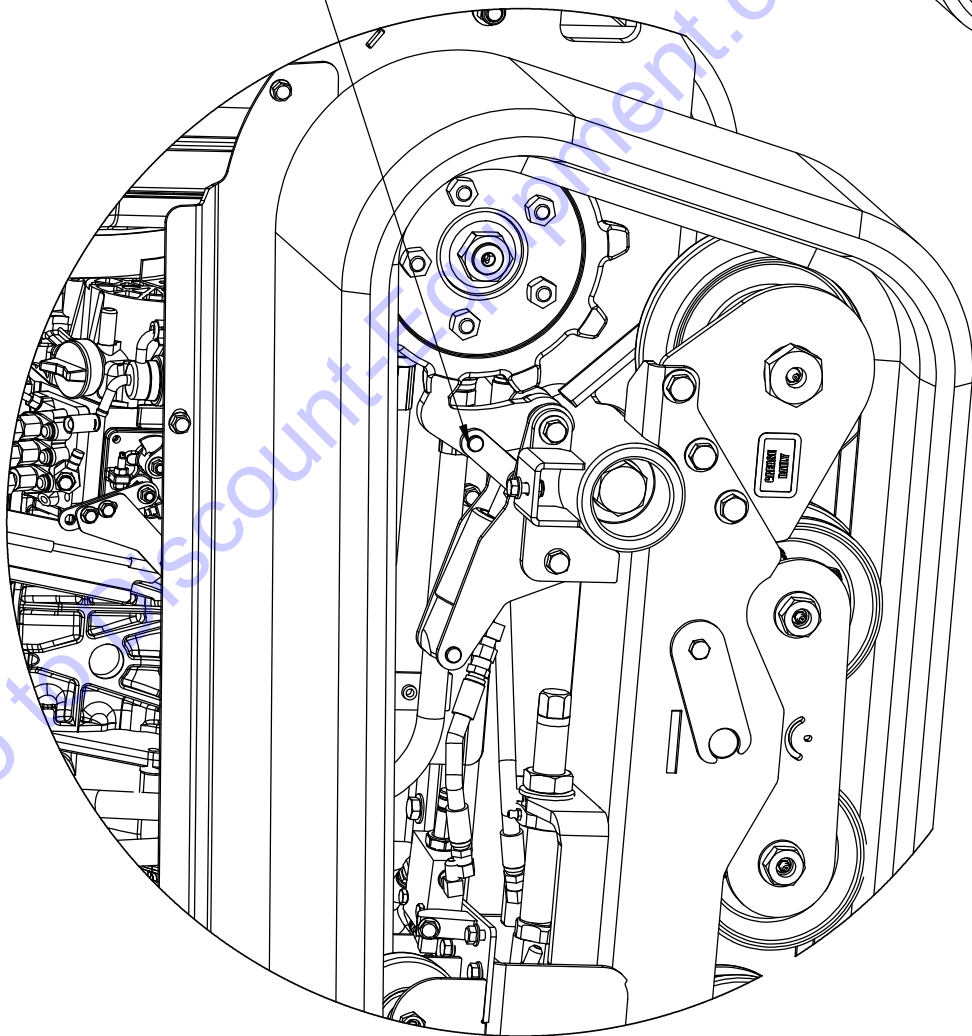

DETAIL A
SCALE 1 : 6

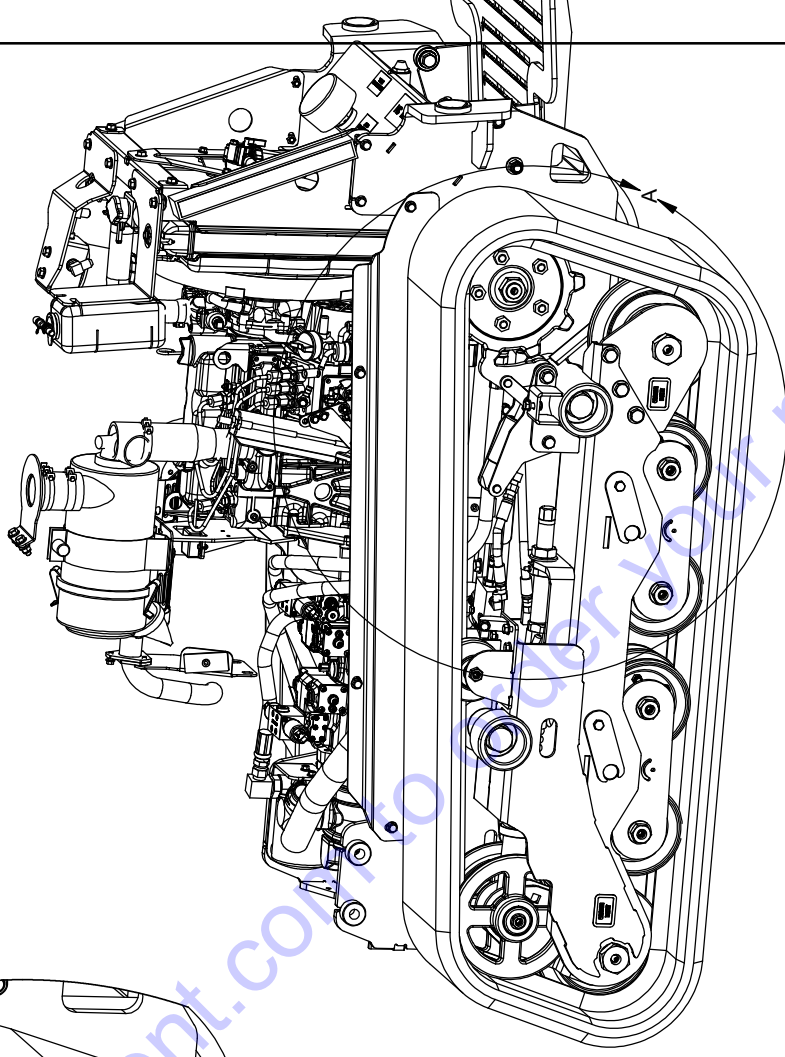

BARRETO

TITLE: FRAME & CARRIAGE ASSEMBLY

PRODUCT LINE: MINI SKIDSTEER

SCALE: 1:12

SHEET 1 OF 1


DWG# BRAKE DISABLE

RELEASE DATE	XXXXXXXXXX
REVISED DATE	NEW
REVISION #	0

TOW BYPASS:
 TURN COUNTER CLOCKWISE
 2 TURNS
 (2) EXTENDED HEX PLUGS

TO ACCESS TOW BYPASS:
 RAISE LIFT ARM AND USE LIFT LOCK TO SECURE IT
 RAISE ENGINE HOOD
 REMOVE BATTERY AND BATTERY TRAY

UPPER FRAME NOT SHOWN
 AND BATTERY TRAY REMOVED
 TO SHOW BYPASS LOCATION

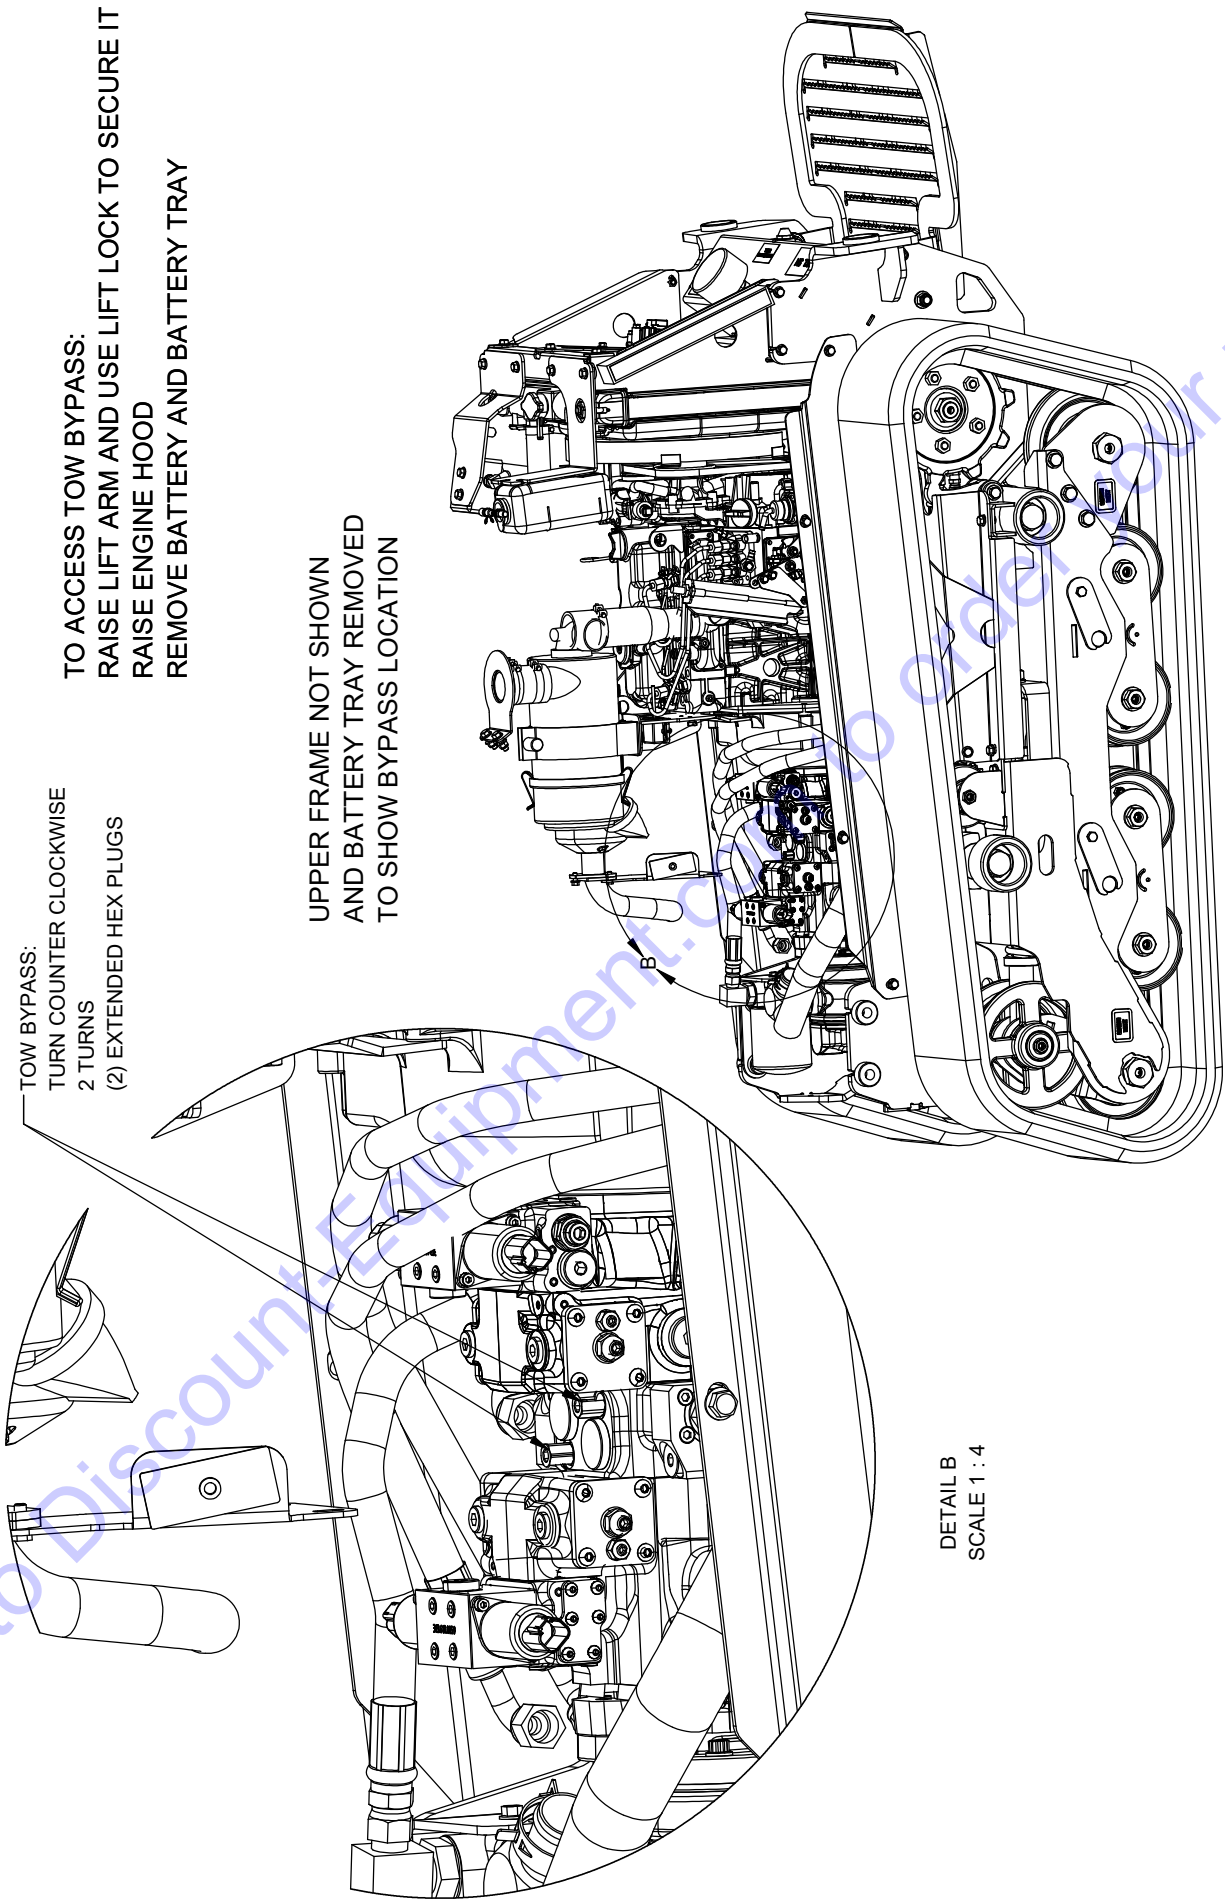

DETAIL B
 SCALE 1 : 4

BARRETO

TITLE: FRAME & CARRIAGE ASSEMBLY

PRODUCT LINE: MINI SKIDSTEER

SCALE: 1:12
 SHEET 1 OF 1

DWG# BYPASS SCREWS

ROAD TRANSPORT OF THE 1025TKL

The 1025TKL must be transported on a trailer with a minimum weight rating of 3500lbs.

Refer to the following checklist before towing:


- Towing vehicles should have the correct size ball. Be sure it is in good repair and securely fastened to the vehicle.
- Securely fasten the hitch to the ball by tightening the hitch nut.
- Thread the safety chain through the loop in the hitch nut handle to prevent it from vibrating loose while towing.
- Attach the safety chain to the towing vehicle in such a way that it cannot come off accidentally.
- Check the hitch-to-ball connection after driving a few blocks and re-tighten if necessary.

Always exercise extreme caution and allow extra clearance while towing a trailer. **DRIVE SAFELY!**


LOADING PROCEDURE:

1. The trailer and vehicle should be located on level ground before loading the 1025TKL.
2. If the trailer ramp angle is greater than 10°, the 1025TKL should be loaded in reverse to allow the bucket or attachment to prevent the unit from tipping forward.
3. Drive the machine onto the trailer and position the machine to provide adequate tongue weight on the towing vehicle (tongue weight should be 10-20% of total towing weight).
4. Raise lift arms to allow access to the tie down point at the front of the 1025TKL body, between the tracks.
5. Picture 1 shows the tie-down loops without the weights, picture 2 shows the weights. The rear tie-down loops in picture two are hidden by the weights. The weights also have a notch on the top to allow the tie-down strap or chain to lay across and attach to the tie-down rings.
6. Loop a chain through the front tie down point and secure the chain with a quick-link or chain binder.
7. Loop a second chain through **both** rear tie down points and secure with a chain binder.
8. Lower the lift arms down onto the chain securing the front of the unit and apply a small amount of downward pressure on the chain.
9. Shut down machine following the shutdown procedure.

Picture 1

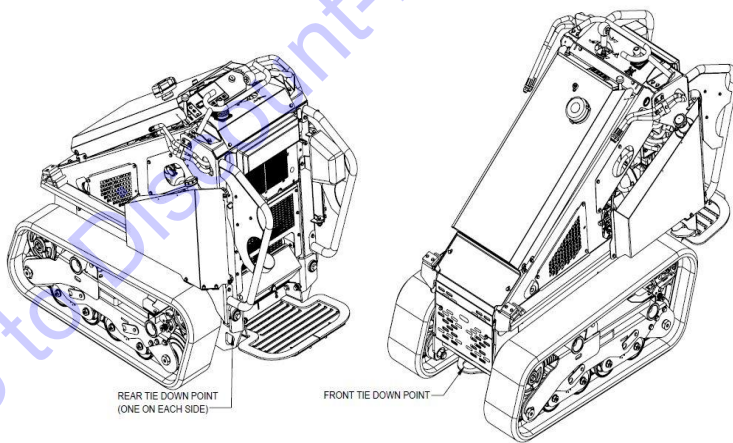

Picture 2

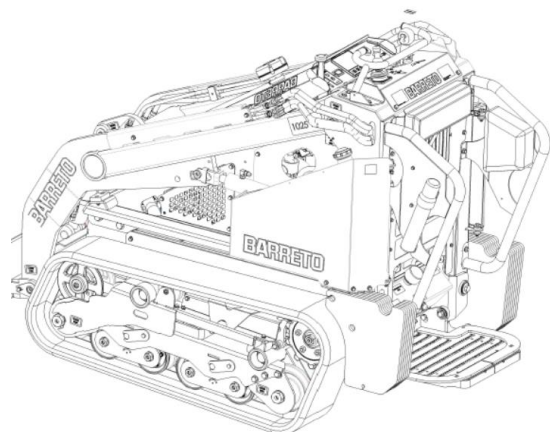

UNLOADING PROCEDURE

1. Position the tow vehicle and attached trailer on level ground.
2. Remove all chains or straps connecting the 1025TKL to the trailer D-rings.
3. Start the engine using the ENGINE START UP PROCEDURE.
4. Keep the bucket or attachment low to the ground to prevent the unit from tipping forward while unloading.
5. Drive the 1025TKL slowly down the trailer or trailer ramps. Continue backward until tracks are completely on the ground.

OPERATOR PREPARATION

Each operator must:

- Become familiar with the controls and operation of the 1025TKL, preferably under the supervision of an experienced operator.
- Be at least 21 yrs. of age and be mentally and physically capable of operating the 1025TKL safely.
- Have studied the SAFETY AND OPERATING INSTRUCTIONS in this manual.

PERSONAL PROTECTION: For safety, 1025TKL operator should wear personal protection equipment. Keep observers at a safe distance.

Wear safety eye goggles and a hard hat while operating or observing!

Wear safety boots and gloves. Wear close-fitting clothing. Contain long hair. Do not wear jewelry. Wear reflective clothing if working near traffic.

Wear adequate hearing (ear) protection while operating or observing.

 **WARNING:** Exposure to loud noise is cumulative and may permanently damage your hearing.



DETERMINE LOCATION OF UNDERGROUND UTILITIES

OSHA CFR 29 1926.651 requires that the estimated location of underground utilities be determined before beginning excavation or an underground drilling operation. When the actual excavation or bore approaches an estimated utility location, the exact location of the underground installation must be determined by a safe, acceptable, and dependable method. If any utility cannot be precisely located, the appropriate utility company must shut it off.

Call before you dig. If you do not call, you may cause an accident; suffer injuries or death; cause interruption of services; damage the environment; and/or incur project delays. Expect to be held liable for any damages caused if you fail to call.



DANGER: Buried electric cables or gas lines can cause severe injury or death if struck with trenching attachments. Always determine location of utilities before trenching.



WARNING: Fiber optic cables convey laser light that can injure your eyesight.

To locate utilities before trenching call 811 or 1-888-258-0808 (US. or Canada). This free service will provide a “One-Call” number for the geographic area that you select. Before you start any digging project, be sure to call the local One-Call system in your area and any utility company that does not subscribe to the One-Call system. The One-Call representative will notify participating utility companies of your proposed digging activities. Utilities will then mark their underground facilities by using the following international marking codes:

Red	Electric
Yellow	Gas, oil, or petroleum
Orange	Communication, telephone, television
Blue	Potable water
Green/brown	Sewer
White	Proposed excavation
Pink	Surveying

For areas not represented by One-Call Systems International, contact the appropriate utility companies to locate and mark the underground installations. Do not rely on visual evidence of underground utilities such as manhole covers or electrical drop boxes...**CALL!**



**Know what's below.
Call before you dig.**

WORK SITE ASSESSMENT

Examine the work area for any conditions or obstructions that may inhibit operation or create a safety hazard for the operator or others. Use the information in this manual combined with good judgment to identify any hazards to avoid.

In addition to calling to DETERMINE LOCATION OF UNDERGROUND UTILITIES (see previous section for details) the operator and/or job foreman should visually inspect the work site. Look for electrical drop boxes; notices of underground placements; manhole covers; recent trenching activity; any evidence of possible underground placements; banks; overhangs; drop-offs; rocks; tree limbs; wire; uneven terrain; any existing trenches or holes; and toxic ground conditions.

Only operate 1025TKL outdoors and do not breathe engine exhaust and fumes.



WARNING: Engine exhaust contains carbon monoxide gas that is toxic. Breathing it can cause unconsciousness and death.

Do not operate 1025TKL near any source of flammable dust or vapors.



WARNING: Sparks from the engine exhaust can cause an explosion or fire in a flammable or explosive atmosphere. Fuel fumes can catch fire or explode.

Allow adequate side and overhead clearances between 1025TKL and any objects such as buildings, fences, and trees.

Adequate lighting is required, daylight or artificial, for the safe operation of the 1025TKL.

Keep others away. If the job site is near a road or pedestrian path, warn and divert both motorized traffic and pedestrians. As appropriate, erect barriers, use traffic flag personnel, signs, cones, and lighting devices to ensure safety.

CONTACT WITH UNDERGROUND UTILITIES

After LOCATING UNDERGROUND UTILITIES and performing the WORK SITE ASSESSMENT, accidental digging attachments contact with a buried utility might still occur. If it does, stop digging and call 911 for help.

If you cut a wire or cable, assume that you do not know what kind it is. It may be electrical or any one of several communication lines: telephone, television, or fiber optic. In any case, do not touch it or even look at the ends of it. Stop digging and call 911 for help. Do not dig any more until the appropriate utility company has assessed the situation, taken appropriate action, and informed you that it is safe to proceed.

If you strike a pipe, it could be gas, oil, petroleum, water, or sewer. In any case, stop digging, shut off the engine, and evacuate the area immediately. Call 911 for help.

Electrical wires or cables: If you think that you may have severed electrical wires, stop digging and call 911 for help. Keep yourself and other people away from the area.



DANGER: An electric shock could kill you. Assume that any severed wire or cable is HOT with voltage and do not touch it!

Gas lines: If you think that you may have struck a gas line, shut off the engine and evacuate the area immediately. Call 911 for help.



DANGER: A gas explosion could kill you. Sparks will likely occur from the dig chain scraping the metal pipe. If gas leaks out an explosion could easily occur.

Fiber optic cables: If you think that you may have severed a fiber optic cable, do not touch, or even look at the ends of it.



WARNING: Fiber optic cables convey laser light that can injure your eyesight. Call 911 for help.



www.discount-equipment.com

PARTS FINDER

**Search Website
by Part Number**



**Search Manual
Library For Parts
Manual & Lookup Part
Numbers – Purchase
or Request Quote**

Search Manuals

Enter your information to help us find the right parts manual for your machine.

* Brand:

* Model:

* Serial:

* Part Number:

SEARCH

**Can't Find Part or
Manual? Request Help
by Manufacturer,
Model & Description**

Parts Order Form

Please fill in the following information to help us find the right part for your machine.

Manufacturer:	<input type="text"/>
Model:	<input type="text"/>
Description:	<input type="text"/>
Part Number:	<input type="text"/>
Quantity:	<input type="text"/>
Notes:	<input type="text"/>

Submit

Discount-Equipment.com is your online resource for quality parts & equipment.

Florida: **561-964-4949** Outside Florida TOLL FREE: **877-690-3101**

Need parts?

Click on this link: <http://www.discount-equipment.com/category/5443-parts/> and choose one of the options to help get the right parts and equipment you are looking for. Please have the machine model and serial number available in order to help us get you the correct parts. If you don't find the part on the website or on one of the online manuals, please fill out the request form and one of our experienced staff members will get back to you with a quote for the right part that your machine needs.

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar