


Specifications

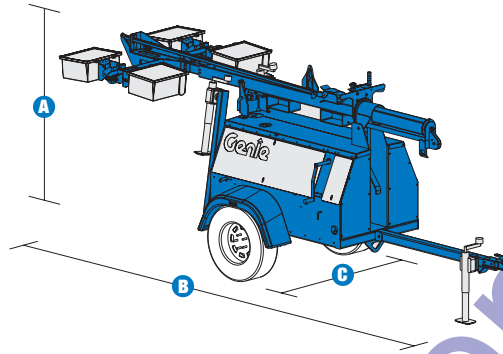

MODELS		TML™-4000		TML™-4000N	
MEASUREMENTS		US	Metric	US	Metric
Tower height		28 ft	8.53 m	28 ft	8.53 m
A Height - stowed		5 ft 11 in	1.80 m	5 ft 11 in	1.80 m
B Length - stowed		14 ft 7 in	4.45 m	14 ft 7 in	4.45 m
C Width - stowed		5 ft 10 in	1.78 m	4 ft 7 in	1.40 m
PRODUCTIVITY					
Leveling capability		30°		30°	
Tower rotation		360° non-continuous		360° non-continuous	
Wind speed rating		up to 60 mph (97 km/h)		up to 60 mph (97 km/h)	
Operating sound level		71 dbA at 23 ft (7 m)		71 dbA at 23 ft (7 m)	
Towing speed rating		60 mph	97 km/h	60 mph	97 km/h
Standard hitch receptacle		2 in	5.08 cm	2 in	5.08 cm
Tire size		205/75D15		185/80D13	
POWER					
Power source		Water-cooled 3 cylinder Lombardini diesel engine 14.3 hp (10.7 kW) Water-cooled Perkins diesel engine 14.5 hp (10.8 kW)			
Generator		6 kW		6 kW	
Total lighting wattage		4,000 watts (four 1,000 watt HID metal halide lamps)			
Auxiliary convenience receptacles		One 120 V GFCI duplex receptacle		One 120 V GFCI duplex receptacle	
Fuel tank capacity		50 gal	189 L	30 gal	114 L
WEIGHT					
Dry		2,061 lbs	935 kg	1,821 lbs	826 kg
Fuel tank full		2,399 lbs	1,088 kg	2,028 lbs	920 kg

Notice: TML lamp bulbs contain mercury (Hg). Dispose of lamp bulbs according to local, state and federal laws.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

POWER OPTIONS

- Lombardini water-cooled diesel engine 14.3 hp (10.7 kW)
- Perkins water-cooled diesel engine 14.5 hp (10.8 kW)
- 60 Hz generator package
- 50 Hz generator package (with Perkins engine only)

RECEPTACLE OPTIONS

- Standard convenience receptacle package (60 Hz only)
- No convenience receptacle package (International only)
- Configurable convenience receptacle package
- Enhanced convenience receptacle package (60 Hz only)

COUPLER OPTIONS

- Combination hitch
- 2 in (5.08 cm) ball coupler
- 3 in (7.62 cm) pintle coupler

TIRES

- 205/75D15 tires (TML-4000)
- 175/80D13 tires (TML-4000N)

STANDARD FEATURES

MEASUREMENTS

TML™-4000

- 28 ft (8.53 m) tower height
- 5 ft 10 in (1.78 m) stowed width

TML™-4000N


- 28 ft (8.53 m) tower height
- 4 ft 7 in (1.40 m) stowed width

PRODUCTIVITY

- 360° non-continuous tower rotation
- 30° leveling capability
- Trailer light package
- 60 mph (97 km/h) tow speed rating
- "Tool-less" Quick-Aim™ horizontal and vertical adjustments of each light fixture
- Patent pending tilt actuating lamp adjustment
- Four 1000 W metal halide lamps with individual circuit breaker switch for each lamp
- Horizontal mounted lamp assembly for more even distribution of light
- Standard convenience 120V AC GFCI protected receptacle (60 Hz only)
- No convenience receptacle package (International only)
- 2 in (5.08 cm) ball hitch
- Padlockable doors
- Forklift pockets and lifting eye
- 205/75D15 tires (TML-4000)
- 175/80D13 tires (TML-4000N)

POWER

- Lombardini water-cooled diesel engine 14.3 hp (10.7 kW)
- Perkins water-cooled diesel engine 14.5 hp (10.8 kW)
- 60 Hz generator package
- 60 to 100 hour run time between fueling
- Keyless ignition and hour meter

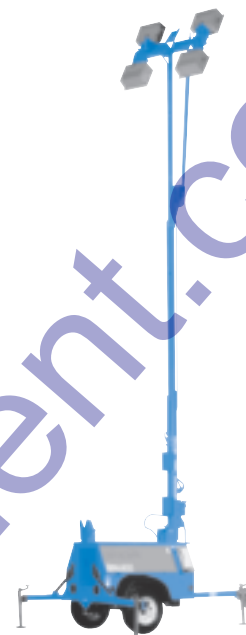

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Configurable convenience two gang junction box
- Enhanced convenience GFCI protected receptacle with two 120V AC and one 240V AC (60 Hz only)
- Combination 2 in (5.08 cm) ball / 3 in (7.62 cm) pintle hitch
- Environmental tray

POWER

- 50 Hz generator package (Perkins engine only)
- Fuel/water separators and pre-filters
- Cold start packages
- Heavy-duty battery
- Keyed ignition



www.discount-equipment.com

Effective Date: July, 2007. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex® is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. Copyright © 2007 Terex Corporation.

TML 2.5K 0707H. Part No. 109374

www.discount-equipment.com