







www.discount-equipment.com

LED GLOBUG

**GloBug lighting** is available in LED and conventional metal halide configurations. The industry's finest glare-free lighting systems - exclusively from Multiquip.

# **GB3LED - 300W LED**



Model	GB3LED	
Voltage (V)	115	
Current (A)	2.7A @ 115V	
Hertz (Hz)	50-60	
Lamp (W)	300W LED	
Lumens	38,000 (High)	
Dimmer Switch	Low/Med/High	
Balloon	33.5″ x 21″	
Mast (Tripod)	2-Stage	
Total Height	12.5′	
Total Weight	27 lbs.	
Min. Generator 350 Watts		
Wind Limits 25 MPH		
Model	GB3LEDB	
This unit is the full balloon lamp assembly only (no Tripod stand) that can be placed onto any GloBug mast.		
Total Weight	17.5 lbs.	
Model	del GB3LEDC	
This unit includes: (1) full GB3LEDB Balloon Lamp assembly only (no Tripod stand), (2) Steel, zinc plated compact mobile cart with two-stage air assisted mast, (3) cart outriggers and brake.		

82 lbs.

25 MPH

Model	GB8LED	
Voltage (V)	115	
Current (A)	6.9A @ 115V	
Hertz (Hz)	50-60	
Lamp (W)	800W LED	
Lumens	110,000 (High)	
Dimmer Switch	Low/Med/High	
Balloon	47" x 28"	
Mast (Pentapod)	3-Stage	
Total Height	13.2′	
Total Weight	48 lbs.	
Min. Generator	850 Watts	
Wind Limits	25 MPH	
Model	GB8LEDB	
This unit is the full balloon lamp assembly only (no Pentapod stand) that can be placed onto any GloBug mast.		
onto any GloBug mast.		
onto any GloBug mast. Total Weight	25 lbs.	
	25 lbs. GBC8LED	
Total Weight	GBC8LED III GB8LED8 Balloon o Pentapod stand), mpact mobile cart with	
Total Weight Model This unit includes: (1) fr Lamp assembly only (n (2) Steel, zinc plated co two-stage air assisted r	GBC8LED III GB8LED8 Balloon o Pentapod stand), mpact mobile cart with	

• 40,000 hour LED life


# LED **Advantages**

Total Weight

Wind Limits

- 3 dimmer stages to control light output
- Exceptional color rendering light properties
- Shock resistant LED assembly
  - Immediate strike / restrike operations
  - •63% less heat emission than metal halide



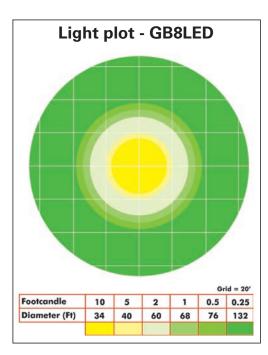





**GB8LED - 800W LED** 

**GloBug applications** include construction sites, emergency response, law enforcement, special events, municipality and industrial applications.

# GB12BW - 400W



Model	GB12BW	
Voltage (V)	120	
Current (A)	4A @ 120V	
Hertz (Hz)	50-60	
Lamp (1)	400W Metal Halide	
Lumens	34,000	
Balloon	33.5″ x 21″	
Mast (Tripod)	2-Stage	
Total Height	10.5′	
Total Weight	35 lbs.	
Min. Generator	450 Watts	
Wind Limits	25 MPH	
Model GB12BP		
This unit is the full balloon lamp assembly only (no tripod stand) that can be placed onto any GloBug mast.		
Total Weight	17 lbs.	

- 360° glare-free diffused lighting
- Integrated electric ballast inside lamp housing
- Perfect elliptical balloon shape
- Balloon is washable and repairable
- Quick, and easy set-up and transportation
- Rugged roll cage supports and protects lamps
- High quality collapsible air-shock masts
- GBC steel cart with (3) outriggers and brakes
- GloBug units easily store in ready-carry vinyl cases
- Units operate in inclement weather conditions
- Meets DOT diffused lighting specifications.



# GBW and GBC - 1000W




GBW 🔦		
120		
9.3A @ 120V		
50-60		
1kW Metal Halide		
107,000		
47″ x 28″		
3-Stage		
13.2′		
52 lbs.		
1,200 Watts		
25 MPH		
GBP		
This unit is the full balloon lamp assembly (no pentapod stand) that can be placed onto any GloBug mast.		
23 lbs.		



#### Model GBC Voltage (V) 120 Current (A) 9.3A @ 120V Hertz (Hz) 50-60 Lamp (1) 1kW Metal Halide Lumens 107,000 Balloon 47" x 28" Mast 3-Stage Steel, zinc plated Cart with (3) outriggers and brake 10.6′ **Total Height Total Weight** 127 lbs. Min. Generator 1,200 Watts Wind Limits 25 MPH

#### Light plot - GBC & GBW





Equipment mount models easily affix to a wide range of vehicles, machinery and equipment to provide mobile glare-free lighting to enhance work site illumination and safety.

U	t
B	
$\overline{\mathbf{O}}$	
$\mathbf{L}$	
エ	
U	
	I
Ζ	l
5	
$\mathbf{\Sigma}$	
Σ	-
_	_
Z	G pi
	fo
	tr re
2	re si
0	

B12BS	М
(International	Vo
	Cı
	He
	La
Teres	Lu
	Ba
h -	м
	То
Land and	То
	м

lare-free lighting rovides safety benefits or work crews and vehicle affic. Complies with DOT equirements for proper job te illumination.

<b>2</b> B	2BS - 400W			GBS - 10	000W
	Model	GB12BS	Model	GBS	GBS
	Voltage (V)	120	Voltage (V)	120	
	Current (A)	4A @ 120V	Current (A)	9.3A @ 120V	
	Hertz (Hz)	50-60	Hertz (Hz)	50-60	
	Lamp	400W Metal Halide	Lamp	1 kW Metal Halide	
	Lumens	34,000	Lumens	107,000	
	Balloon	33.5″ x 21″	Balloon	47" x 28"	
	Mast	(1) Straight pole; (1) 90° offset pole	Mast	(1) Straight pole; (1) 90° offset pole	
	Total height	6.1′	Total height	6.5′	
	Total weight	35 lbs.	Total weight	40 lbs.	
	Min. Generator	450 Watts	Min. Generator	1,200 Watts	
	Wind Limits	25 MPH	Wind Limits	26 MPH	GloBug e
le F ob	Mount Assembly (1) GB12BP (400 (1) Straight pole (1) 90° off-set po (2) Universal cla	W)	Mount Assembly (1) GBP (1000W) (1) Straight pole (1) 90° off-set po (2) Universal cla		models p and com solutions includes t assembly

GBMP

Mount Poles & Plate


Mount plate

2 poles

Hardware

GB12BP, GBP,

**GB3LEDB** 



**GloBug equipment mount** models provide versatile and complete lighting solutions. Each model includes the balloon light assembly, universal mounting clamps and mounting hardware.

**GBHM - HITCH MOUNT** 

# **GBMP - MOUNTING PLATE**

Model

Model type

Supports

Globug

models

Items Included



The Mounting Plate accessory attaches to flat surfaces and is ideal for installation on construction equipment and trailers. The GBMP supports all E-ballast GloBug balloon lighting units.

Discount

Equipment



**GBMP** attaches to the sides of equipment and supports all E-ballast GloBug balloon lighting units.



**GBHM** 

Hitch Mount

Tow hitch mount

2 poles

Hardware

GB12BP, GBP,

**GB3LEDB** 

**GBHM** slides over and secures to the most tow bar hitches. Draw bar length must accommodate 5" of length to affix the GBHM.



The Hitch Mount slides over 2" x 2" draw bars. This attachment is perfect for utility and job-site vehicles. The **GBHM** supports all E-ballast GloBug balloon lighting units.



www.discount-equipment.com

#### 4

**The 4-Spot 1,600 Watt Light Tower** is a very compact, mobile lighting solution for residential, industrial, and commercial job site applications.




Model	GB43SC
Voltage (V)	120
Current (A)	16 @ 120V
Hertz (Hz)	60
Lamp (4)	400W Metal Halide
Lamp Type	Metal Spot Light
Lumens	136,000
Plug Type	NEMA 5-20P
Mast (Cart)	3-Stage
Mast (Raise)	Manual Winch
Cart	Steel, Zinc Plated
Outriggers	2
Wheels (4)	8" Pneumatic
Total Height	13.7′
Storage Height	41" x 36" x 67"
Turning Radius	7.7′
Total Weight	364 lbs
Min. Generator	2,500 Watts
Wind Limits	40 MPH

# GB43SC - 1,600W METAL HALIDE

- Powerful light source in a small footprint
- Solid aluminum lamp housing can be individually oriented to best support the lighting requirements
- Operates on hard electrical connections as well as most portable generators
- Cart handle bar for easy steering and transportation
- Counterweights lock safety outriggers into position
- Lifting bale for safe tower handling
- 5 Footcandle power out to 90'
- Folds to tight 3.5' x 3' x 5.6' package for transportation and storage









# **The GB2000** easily connects to the electrical and ballast systems of most conventional light towers to provide exceptional glare-free lighting.



# GB2000 - 2,000W METAL HALIDE

- 2,000 Watt 360° glare-free diffused lighting system
- Seamlessly works with the existing light tower electrical systems
- Integrated balloon fan inside lamp housing
- Perfect cylindrical balloon shape
- Balloon is washable and repairable
- Quick disconnect electrical fittings
- Excellent light coverage of over 240 feet
- Quick, and easy set-up and transportation
- Meets DOT diffused lighting specifications
- Comes with all T-Bar mounting bracket and all necessary hardware

/lod		
100		


Assembly includes: (1) GB2000 balloon lamp assembly (1) Universal bracket assembly (1) Electrical Junction box and connection hardware		
Voltage (V)	238-268	
Current (A)	8.2A @ 240V	
Hertz (Hz) 50-60		
Lamp (2) 1kW Metal Halide		
Lumens	220,000	
Balloon (Inflated)	34.5" x 35.5"	
Total Height 39"		
Total Weight 31 lbs		
Min. Generator 3,200 Watts		
Wind Limits 40 MPH		

**GB2000** 



Balloon lamp assembly folds into a convenient carrying case

The GB2000 easily connects to the electrical and ballast systems of the light tower for seamless operations. Two conventional lamps may still be operated with the GB2000.

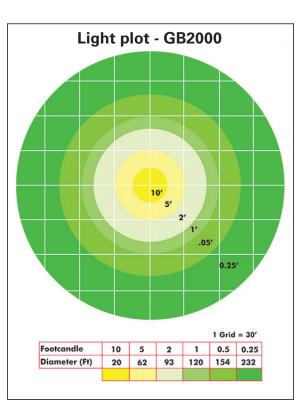





The **GB4000** provides powerful glare-free lighting for Multiquip light towers users. This GloBug meets regulatory requirements, allows for diffused illuminance that eliminates shadows, improves operator job site awareness, and curtails caustic light glare to on-coming automotive traffic.





# GB4000 - 4,000W METAL HALIDE

- 4,000 Watt 360° glare-free diffused lighting system
- Seamlessly works with the existing light tower electrical systems
- Integrated balloon fan inside housing
- Perfect cylindrical balloon shape
- Balloon is washable and repairable
- Quick disconnect electrical fittings
- Excellent light coverage of over 300 feet
- Quick, and easy set-up and transportation
- Meets DOT diffused lighting specifications
- Comes with all T-Bar mounting bracket and all necessary hardware

Model	<b>GB4000</b>	
Assembly includes: (1) GB4000 balloon lamp assembly (1) Universal bracket assembly (1) Electrical Junction box and connection hardware		
Voltage (V)	120	
Current (A)	37.2A @ 240V	
Hertz (Hz)	50-60	
Lamp (4)	1kW Metal Halide	
Lumens	428,000	
Balloon (Inflated)	55.1" x 47.2"	
Total Weight	41 lbs	
Min. Generator	4,200 Watts	
Wind Limits	40 MPH	




Balloon lamp assembly folds into a convenient carrying case



The GB4000 easily connects to the electrical and ballast systems of the light tower for seamless operation.



Diffused, glare-free light coverage of up to 300'

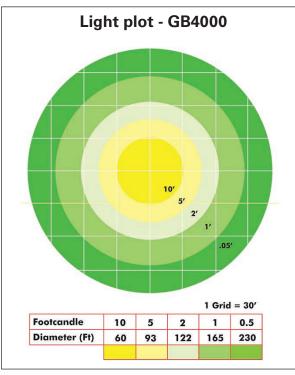





#### **Balloon Bag Replacements**





#### **GB36** 36" cylindrical balloon recommended for DOT work. For GloBug models: GBW, GBP, GBS, GBC, GB8LED, GB8LEDB

48" cylindrical balloon

DOT work. For GloBug

models: GBW, GBP,

GBS, GBC, GB8LED,

recommended for

**GB48** 

**GB8LEDB** 



#### A100085103

standard balloon replacement for the GB2000 with a reflective top crown

GBBAL115D standard balloon with reflective top fits:

GBW, GBP, GBS, GBC, GB8LED, GB8LEDB A1000108400 standard balloon fits: GB8LED, GB8LEDB, GBC8LED


### **Mast and Poles**

GBXPOLE - aluminum 35" extension pole that fits existing masts: GB12BW, GBW, GBC, GB3LED, GB8LED

A300166600 - steel 35" extension pole that fits existing masts: GBW, GBC, GB12BW, GB3LED, GB8LED

GBSPOLE - steel two-piece 90° off-set pole kit (no lamp) that supports: GB12BS, GBS

A000028700 - Complete telescopic mast (2 pc.) assembly that fits: GB12BW, GBW, GBC, **GB3LED, GB8LED** 



#### **Stand Replacement**

#### **GBWSTAND**

complete 5-point pent-a-pod stand that fits GloBug models: GBP, GB8LEDB



A000019600 complete 3-point tripod stand that fits GloBug models: GB12BP, GB3LEDB



#### A100107800 - balloon replacement for the GB4000 w/ no reflective top crown

A100098700

standard balloon

top crown

replacement for the

**GB4000** with reflective

#### **Cart Replacement**

#### GBCCART

Complete GBC hand cart (less GloBug lamp) that supports: GB12BP, GB3LEDB, GBP, GB8LEDB



#### **Hanging Kit**



Provides the balloon and hardware to orient the GloBug lamp to be suspended from above. Fits: GBW, GBC, GBS, GBP, GB12BW, GB12BP, GB12BS, GB3LED, GB3LEDB, GB8LED, GB8LEDB

A000034400 - Hanging Kit hardware and fasteners

A100086400 - Hanging Kit balloon bag

#### **Balloon Message Strips**



Personalized Message Strips are available at your request. They can highlight the particular application, support the job site, or enhance your business's exposure. Contact Multiquip Sales for information on standard or personalized value added message strips that can include company logos, event definition, or special occasion.

Message Strips easily velcro to fit balloons: GB12BW, GB3LED, GB12BP - 9" x 31" strip GBW, GBP, GBC, GBS, GB8LED – 12" x 43" strip **GB36S** – 36" x 36" strip; **GB48** – 48" x 48" strip GB2000 - 24" x 43"; GB4000 - 26" x 54"



MULTIQUI