

POWERED by  
**HONDA™ TRASH PUMPS**

**Outstanding Features**

- Silicon Carbide Mechanical Seals for Increased Abrasive Resistance, Longer Life, and Less Maintenance
- Impellers Blended with Hi-Chrome Cast Iron, for Extreme Durability and Erosion Resistance
- Front Covers are Removable Without Disassembly of Hoses. Easy and Quick Access, for Cleaning out Debris, or Pump Repair
- Volute is Constructed of Spheroidal Graphite Ductile Iron, Eliminating the Need for a Wear Plate, Increasing Durability, and Longer Operating Life
- Pump Housings are Made of Die Cast Aluminum for Strength, Weight Reduction, and Portability
- Strong Transport Protection Powder Coated Steel Roll Cages
- Honda Engines with Low Oil Shut Off
- Two Year Limited Warranty on Pump Ends




**KTH-80S**



**KTH-50X**

**PERFORMANCE CURVES**

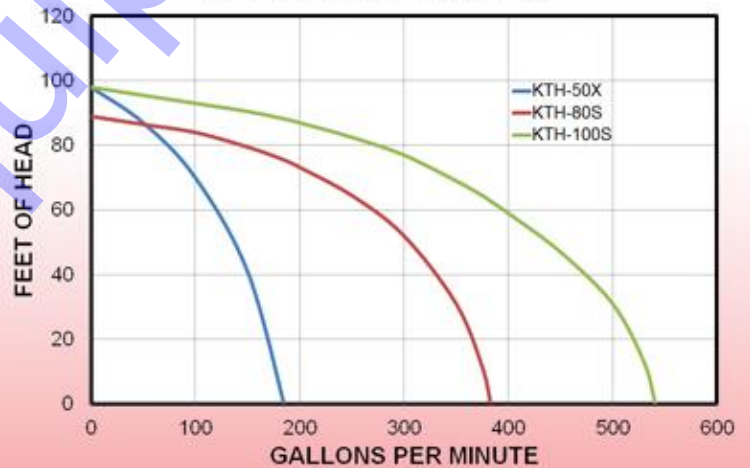

	KTH-50X	KTH-80S	KTH-100S
Suction, Discharge Size	2" NPT	3" NPT	4" NPT
Maximum Output (GPM)	185	383	541
Maximum Discharge Head (ft)	98	89	98
Maximum Suction Lift (ft)	26	26	26
Maximum Pressure (Psi)	42.4	38.5	42.4
Engine Model	GX160	GX270	GX390
Engine Displacement (cc)	163	270	389
Engine Horse Power	4.8	8.5	11.7
Fuel Tank Capacity (Gal)	0.82	1.39	1.60
Full Load Run Time (hrs)	2	2	1.5
Fuel Type	Unleaded Automotive Gasoline		
Packaged Weight (Lbs)	111	161	201
Packaged Dimensions (LxWxH)	24"x18"x19"	28"x23"x24"	30"x24"x25"



**Optional  
 Wheel Kit  
 Available**