


TT250/TT500

TACK DISTRIBUTOR




POWER TO PUMP.

Weiler tack distributors are powered by a 5.5 hp (41 kW) Honda engine with clutched pump for easier starting and electric start option. The direct-drive pump is designed for asphalt with a capacity of 15 gpm (57 L/min).

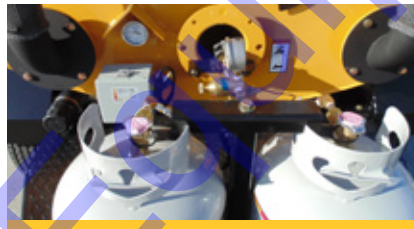


HIGH BTU BURNER.

The 300,000 BTU burner provides quick heating times. Dual propane tanks provide extended use between changes and the push button ignitor simplifies the lighting process.

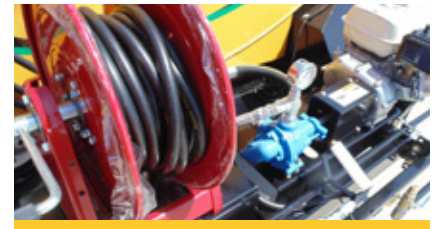

SPRAY WAND.

The 5' 6" (1.7 m) spray wand and 50' (15 m) hose reel provide optimal coverage range for tight jobsites.

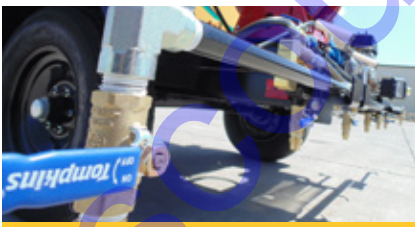


FOLD-ABLE SPRAY BAR.

The optional spray bar folds from 6' (1.8 m) to 9' (2.7 m) and features 7 independently controlled nozzles for optimal coverage. The optional wireless remote for the spray bar allows operation away from the machine.



SIMPLE OPERATION.

Numbered valves and valve operation decals clearly specify machine setup for warmup/recirculation, spray, reclaim and cleanout operations.

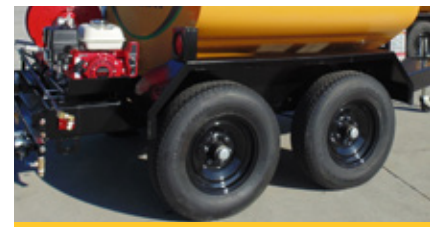

HEAVY DUTY TRAILER.

4,000 lb (1814 kg) GVWR trailer for the TT250 and 7,200 lb (3266 kg) GVWR trailer for the TT500 feature either ball or pintle hitch, electric brakes, emergency break-away brake system, safety tow chains and pre-wired 6-pin connector.



www.discount-equipment.com

TT250/TT500 SPECIFICATIONS

TT250 CAPACITY	250 gal	946 L
TT250 SHIP WEIGHT	1,850 lb	839 kg
TT250 WORK WEIGHT	4,000 lb	1814 kg
TT250 HEIGHT	80"	2032 mm
TT250 LENGTH	10'	3048 mm
WIDTH	78"	1981 mm

TT500 CAPACITY	500 gal	1892 L
TT500 SHIP WEIGHT	2,900 lb	1315 kg
TT500 WORK WEIGHT	7,200 lb	3266 kg
TT500 HEIGHT	86"	2184 mm
TT500 LENGTH	14'	4267 mm
WIDTH	78"	1981 mm

BURNER	1 x 300,000 BTU	
ENGINE	Honda	
HORSEPOWER	5.5 hp	41 kW
PUMP	15 gpm	57 L/min
HOSE REEL	50'	15 m
FLUSH TANK	13 gal	49 L

POWERTRAIN

- 5.5 hp (41 kW) Honda engine
- Electric engine start option
- 15 gpm (57 L/min) direct-drive asphalt pump with integral relief valve

TRAILER

- 4,000 lb (1814 kg) GVWR trailer for TT250
- 7,200 lb (3266 kg) GVWR trailer for TT500
- Ball or pintle hitch equipped
- Electric brakes
- Emergency break-away brake system
- Safety tow chains
- Pre-wired with a 6-pin connector

TACK TANK

- 250 gal (946 L) or 500 gal (1892 L) capacity
- 300,000 BTU burner
- 20 lb (9 kg) dual propane tanks
- Push button igniter
- Fluid level indicator
- Tack temperature gauge
- DOT 406 emergency venting relief valve
- Optional electric tank heater w/ adjustable temperature control

SERVICE/MAINTENANCE

- 13 gal (49 L) flush tank for cleaning solvent
- Reclaim and cleanout functions
- Removable spray nozzles

MATERIAL DELIVERY

- 50' (15 m) hose reel
- 5'6" (1.7 m) spray wand
- Optional rear-mounted spray bar, adjustable 6' (1.8 m) to 9' (2.7 m)
- Ball valves allow individual control of 7 spray bar nozzles
- Optional wireless spray bar control remote
- Tank recirculation valve
- Numbered valves for simplified operation

OPTIONAL EQUIPMENT

- 2 5/16" (58 mm) ball hitch
- Pintle hitch and ball hitch group
- Spare tire and mount
- Spray bar with manual valve control
- Remote for spray bar
- Electric start
- Electric tank heat

SALES AND SERVICE

WARRANTY

12 months standard. Extended warranty available.

