


Owner's Manual

For DF 2.2 Dust Suppression System



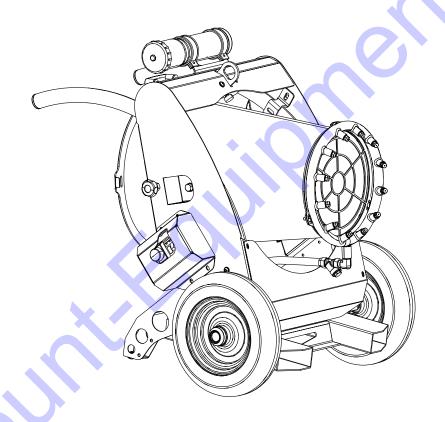

www.discount-equipment.com

Discount Equipment

Discount-Equipment.com is your online resource for commercial and industrial quality parts and equipment sales.

Locations:

Florida (West Palm Beach): 561-964-4949

Outside Florida TOLL FREE: 877-690-3101

Need parts? Check out our website at www.discount-equipment.com

Can't find what you need?

Click on this link: http://www.discount-equipment.com/category/5443-parts/ and fill out the request form.

Please have the machine model and serial number available in order to help us get you the correct parts. One of our experienced staff members will get back to you with a quote for the right part that your machine needs.

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mayco, Toro/Stone, Diamond Products, Magnum, Airman, Mustang, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand Brothers, Essick, Miller Spreader, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna/Target, Whiteman-Concrete/Mortar, Stow-Concrete/Mortar, Baldor, Wacker, Sakai, Snorkel, Upright, Mi-T-M, Sullair, Neal, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Blaw-Knox, Himoinsa, Best, Buddy, Crown, Edco, Wyco, Bomag, Laymor, Terremite, Barreto, EZ Trench, Takeuchi, Basic, Bil-Jax, Curtis, Gehl, Heli, Honda, ICS/PowerGrit, Puckett, Waldon, ASV, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, Gorman Rupp, CH&E, Cat Pumps, Comet, General Pump, Giant, AMida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, Small Line, Wanco, Yanmar

New Equipment - Used Equipment - Rental Equipment - Parts and Accessories



www.discount-equipment.com 561-964-4949

Use this page to record important information about your Generac Mobile Product

Unit Model Number	
Unit Serial Number	
Date Purchased	

Record the information found on your unit data label on this page.

Engine and generator serial numbers are located on separate data plates affixed to the engine and generator respectively.

When contacting a Generac Mobile Products Authorized Service Dealer (ASD) about parts and service, always supply the complete model number and serial number of the unit.

Operation and Maintenance: Proper maintenance and care of the generator ensures a minimum number of problems and keeps operating expenses at a minimum. It is the operator's responsibility to perform all safety checks, to verify that all maintenance for safe operation is performed promptly, and to have the equipment checked periodically by an ASD. Normal maintenance, service and replacement of parts are the responsibility of the owner/operator and, as such, are not considered defects in materials or workmanship within the terms of the warranty. Individual operating habits and usage may contribute to the need for additional maintenance or service.

≜WARNING

CANCER AND REPRODUCTIVE HARM

www.P65Warnings.ca.gov.

(000393a)

Table of Contents

Section 1: Introduction and Safety		
Introduction	1	
Read This Manual Thoroughly		
How to Obtain Service	1	
Safety Rules	1	
Safety Symbols and Meanings	1	
General Hazards	2	
Electrical Hazards	2	
Operating Safety	3	
Positioning the Unit		
Starting the Unit	3	
Service Safety	3	
Section 2: General Information		
Section 2: General Information		
Section 2: General Information Specifications	5	
Specifications	5	
Specifications Component Locations	5 6	
Specifications Component Locations Setup	5 6	
Specifications Component Locations Setup Water System Connection	5 6	
Specifications	5 6 6	
Specifications	5 6 6	
Specifications	5 6 6	
Specifications	5 667	
Specifications Component Locations Setup Water System Connection Electrical Connection Section 3: Operation Operation and Use Questions Before Starting	5 6677	

Section 4: Maintenance and Troubleshooting

Daily Walk-Around Inspection	9
General Maintenance	9
Inspecting the Unit	9
Preparing for Service	g
Cleaning the Unit	g
Inlet Filter Cleaning	10
Nozzle Cleaning	10
General Troubleshooting	10

Lifting the Unit

Section 1: Introduction and Safety

Introduction

Thank you for purchasing a Generac Mobile Products LLC product. This unit has been designed to provide high performance, efficient operation, and years of use when maintained properly.

The information in this manual is accurate based on products produced at the time of publication. The manufacturer reserves the right to make technical updates, corrections, and product revisions at any time without notice.

Read This Manual Thoroughly



AWARNING

Consult Manual. Read and understand manual completely before using product. Failure to completely understand manual and product could result in death or serious injury. (000100a)

If any section of this manual is not understood, contact your nearest Generac Mobile Products Authorized Service Dealer (ASD) with any questions or concerns.

The owner is responsible for proper maintenance and safe use of the equipment. Comply with regulations the Occupational Safety and Health Administration (OSHA) has established, or with equivalent standards. Also, verify that the unit is applied, used, and maintained in accordance with the manufacturer's instructions and recommendations. Do nothing that might alter safe application/usage and render the unit in noncompliance with the aforementioned codes, standards, laws, and regulations.

Save these instructions for future reference. This manual contains important instructions for the unit that should be followed during setup, operation and maintenance of the unit and battery. ALWAYS supply this manual to any individual that will use this machine.

How to Obtain Service

When the unit requires servicing or repairs, contact an ASD for assistance. Service technicians are factory-trained and are capable of handling all service needs.

When contacting an ASD about parts and service, always supply the complete model and serial number of the unit as given on the data decal located on the unit. Record the model and serial numbers in the spaces provided on the front cover of this manual.

Safety Rules

The manufacturer cannot anticipate every possible circumstance that might involve a hazard. The warnings in this manual, and on tags and decals affixed to the unit are, therefore, not all inclusive. If using a procedure, work method or operating technique that the manufacturer does not specifically recommend, verify it is safe for others. Also make sure the procedure, work method or operating technique utilized does not render the equipment unsafe.

Safety Symbols and Meanings

Throughout this publication, and on tags and decals affixed to the unit, DANGER, WARNING, CAUTION and NOTE blocks are used to alert personnel to special instructions about a particular operation that may be hazardous if performed incorrectly or carelessly. Observe them carefully. Their definitions are as follows:

ADANGER

Indicates a hazardous situation which, if not avoided, will result in death or serious injury.

(000001)

AWARNING

Indicates a hazardous situation which, if not avoided, could result in death or serious injury.

(000002)

ACAUTION

Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

(000003)

NOTE: Notes contain additional information important to a procedure and will be found within the regular text of this manual.

These safety alerts cannot eliminate the hazards that they indicate. Common sense and strict compliance with the special instructions while performing the action or service are essential to preventing accidents.

General Hazards



WARNING

Hearing Loss. Hearing protection is recommended when using this machine. Failure to wear hearing protection could result in permanant hearing loss. (000107)



AWARNING

Vision loss. Eye protection is required when operating unit. Failure to wear appropriate eye protection could result in vision loss or serious injury. (000407)



AWARNING

Moving Parts. Keep clothing, hair, and appendages away from moving parts. Failure to do so could result in death or serious injury.

(000111)

AWARNING

Equipment damage. Do not attempt to start or operate a unit in need of repair or scheduled maintenance. Doing so could result in serious injury, death, or equipment failure or damage. (000291)

AWARNING

Risk of injury. Do not operate or service this machine if not fully alert. Fatigue can impair the ability to service this equipment and could result in death or serious injury.

(000215)

AWARNING

Equipment damage. Only qualified service personnel may install, operate, and maintain this equipment. Failure to follow proper installation requirements could result in death, serious injury, and equipment or property damage.

(000182a)

ACAUTION

Equipment or property damage. Do not block air intake or restrict proper air flow. Doing so could result in unsafe operation or damage to unit.

(000229)

Electrical Hazards



ADANGER

Electrocution. In the event of electrical accident, immediately shut power OFF. Use non-conductive implements to free victim from live conductor. Apply first aid and get medical help. Failure to do so will result in death or serious injury. (000145)



ADANGER

Electrocution. Water contact with a power source, if not avoided, will result in death or serious injury.

(000104)



ADANGER

Electrocution. Verify electrical system is properly grounded before applying power. Failure to do so will result in death or serious injury. (000152)



ADANGER

Electrocution. Do not wear jewelry while working on this equipment. Doing so will result in death or serious injury.

(000188)



ADANGER

Electrocution. DO NOT use the unit if electrical cord is cut or worn through. Doing so will result in death or serious injury.

(000263a)

Operating Safety

Positioning the Unit

AWARNING

Crushing hazard. Verify unit is properly secured and on level ground. An unsecured unit can suddenly roll or move, causing death or serious injury.

(000234a)

AWARNING

Personal injury. Only use water from controlled, reliable sources. Uncontrolled water could contain bacteria. Inhaling mist containing bacteria could result in death, or serious injury. (000584)

AWARNING

Personal injury. Keep people and pets away from work area. Failure to do so could result in death or serious injury.

(000420)

AWARNING

Personal injury. Never direct air jet toward people or animals. Shut unit OFF immediately if people or animals enter the work area. Failure to do so could result in death or serious injury. (000585)

- The area immediately surrounding the unit should be dry, clean, and free of debris.
- If the unit is equipped with a frame grounding stud, follow any local, state, and National Electrical Code (NEC) guidelines when connecting.

Starting the Unit



ADANGER

Electrocution. DO NOT use the unit if electrical cord is cut or worn through. Doing so will result in death or serious injury.

(000263a)

AWARNING

Equipment damage. Do not attempt to start or operate a unit in need of repair or scheduled maintenance. Doing so could result in serious injury, death, or equipment failure or damage. (000291)

Service Safety

AWARNING

Before servicing unit, shut unit down, turn water supply OFF, and disconnect unit from power source. Failure to do so could result in death, serious injury, or equipment damage.

(000586)

Lifting Hazards



WARNING

Personal injury. Failure to properly connect lifting cables, chains, or straps could result in death, serious injury, or property damage.

(000346)

AWARNING

Personal Injury. Do not use lifting eye if there are signs of damage or corrosion. Doing socould result in death, serious injury, or property damage.

(000433)

AWARNING

Personal Injury. Do not use lifting eye other than as directed. Doing so could result in death, serious injury, or property damage.

(000434)

AWARNING

Personal Injury. Verify all fasteners are properly tightened prior to lifting unit. Failure to do so could result in death, serious injury, or property damage.

(000351)

Section 2: General Information

Specifications

Description	Units	DF 2.2
Voltage	V	240
Hertz	Hz	60
Pump Power	kW	2.2
Electric Connection	-	L6-15 NEMA twistlock
Water Connection	-	3/4" garden hose
Fan	-	9 Nylon blades, aluminum hub
Nominal Pressure	psi (bar)	14.5 (1) - 72.5 (5)
Water Consumption	psi gal/min (barl/min)	14.5 1.44 (1.0 - 5.4) 21.8 1.74 (1.5 - 6.6) 29 1.98 (2.0 - 7.5) 36.3 2.25 (2.5 - 8.5)
Air Flow	ft ³ /min (mm ³ /min)	295 (90)
Water Inlet Filter	μm	300
Nozzles Holder		Stainless steel w/ 12 connection
Tilting Angle	٥	10 to 50
Weight	lb (kg)	175 (79)
Dimensions	L x W x H ft (L x W x H mm)	3.3 X 2.6 X 2.74 (985 x 785 x 835)

Component Locations

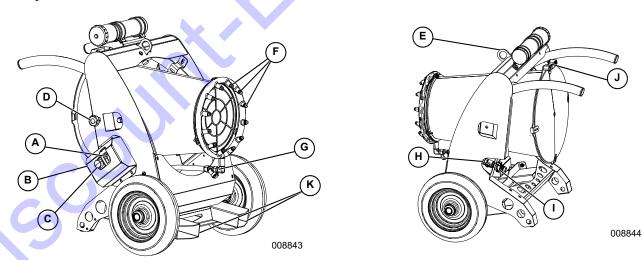


Figure 2-1. Component Locations

A Start Button
 B Socket
 C Stop Button
 D Tilting Blower Knob
 E Lifting Hook
 F Nozzles
 J Tilting Blower Handle
 K Forklift Pockets
 H Water Tap

Setup

Water System Connection

AWARNING

Personal injury. Only use water from controlled, reliable sources. Uncontrolled water could contain bacteria. Inhaling mist containing bacteria could result in death, or serious injury. (000584)

1. See Figure 2-2. Verify water valve (A) is closed.




Figure 2-2. Connecting Water Supply

2. Connect water supply to water fitting (B).

Electrical Connection



ADANGER

Electrocution. In the event of electrical accident, immediately shut power OFF. Use non-conductive implements to free victim from live conductor. Apply first aid and get medical help. Failure to do so will result in death or serious injury. (000145)



ADANGER

Electrocution. Verify electrical system is properly grounded before applying power. Failure to do so will result in death or serious injury. (000152)



ADANGER

Electrocution. Water contact with a power source, if not avoided, will result in death or serious injury.

(000104)

1. See *Figure* 2-3. Verify switch (A) is in OFF position.




Figure 2-3. Electrical Connection

- **2.** Connect to socket (B) 240v power with the following requirements:
 - Extension cord must be marked "WA" or indicate it is suitable for outdoor use.
 - Power source must be equipped with residualcurrent device (RCD) protection.
 - Use adequately sized extension cords of appropriate length. See *Table 1* for recommended cable size and length.

Table 1 - Recommended Shore Power Cable Size and Length

Suggested Power Cables and Lengths 50 ft. (15.2 m) 10/3—(L5-20P – L5-20R) 100 ft. (30.5 m) 12/3—(5-15P – 5-15R)

Section 3: Operation



ADANGER

Electrocution. In the event of electrical accident, immediately shut power OFF. Use non-conductive implements to free victim from live conductor. Apply first aid and get medical help. Failure to do so will result in death or serious injury. (000145)



ADANGER

Electrocution. Verify electrical system is properly grounded before applying power. Failure to do so will result in death or serious injury. (000152)



ADANGER

Electrocution. Water contact with a power source, if not avoided, will result in death or serious injury.

(000104)



AWARNING

Consult Manual. Read and understand manual completely before using product. Failure to completely understand manual and product could result in death or serious injury. (000100a)

AWARNING

Equipment damage. Do not attempt to start or operate a unit in need of repair or scheduled maintenance. Doing so could result in serious injury, death, or equipment failure or damage. (000291)

AWARNING

Personal injury. Never direct air jet toward people or animals. Shut unit OFF immediately if people or animals enter the work area. Failure to do so could result in death or serious injury. (000585)

AWARNING

Personal injury. Keep people and pets away from work area. Failure to do so could result in death or serious injury.

(000420)

AWARNING

Personal injury. Only use water from controlled, reliable sources. Uncontrolled water could contain bacteria. Inhaling mist containing bacteria could result in death, or serious injury. (000584)

Operation and Use Questions

Contact your nearest Generac Mobile Products Authorized Service Dealer (ASD), or contact Generac Mobile Products Technical Service at 1-800-926-9768 or

www.generacmobileproducts.com with any questions or concerns about unit operation and maintenance.

Before Starting

- 1. Place unit on flat ground in a well ventilated area.
- 2. Place barriers 6 ft (2 m) around unit to prevent unauthorized personnel from nearing unit.
- Verify sufficient water supply is properly connected See Water System Connection.
- 4. Inspect all electrical cords; repair or replace any cords that are cut, worn, or bare.
- Verify power cord is properly connected to a 240 volt 60 hz power source. See *Electrical Connection*.

NOTE: For grounding requirements, follow the National Electrical Code (NEC), state, and local regulations.

Starting the Unit

1. See Figure 3-1. Press start button (A) to start fan.




Figure 3-1. Starting the Unit

2. See Figure 3-2. Open valve (B).




Figure 3-2. Starting the Unit

Stopping the Unit

- 1. See Figure 3-1. Close water valve (A).
- 2. Wait for water to stop spraying from nozzles (B).




Figure 3-3. Stopping the Unit

3. See Figure 3-4. Press stop button (C).




Figure 3-4. Stopping the Unit

Adjusting Jet Angle

- 1. See Figure 3-5. Pull tilting blower knob (A).
- 2. Use handle (B) to tilt blower to desired angle.
- Release tilting blower knob to lock position.




Figure 3-5. Adjusting Jet Angle

Lifting the Unit



AWARNING

Personal injury. Failure to properly connect lifting cables, chains, or straps could result in death, serious injury, or property damage.

(000346)

AWARNING

Personal Injury. Do not use lifting eye if there are signs of damage or corrosion. Doing socould result in death, serious injury, or property damage.

(000433)

AWARNING

Personal Injury. Do not use lifting eye other than as directed. Doing so could result in death, serious injury, or property damage.

(000434)

- Verify the equipment being used to lift the unit is in good condition and has sufficient capacity. For approximate weights, see Specifications.
- 2. See *Figure 3-6*. Always remain aware of people and objects around the work site when moving or lifting the unit.
 - When lifting the unit, attach any slings, chains, or hooks directly to the central lift point (A).
 - Use forklift pockets (B) with care. Avoid approaching the unit at an angle, as this can permanently damage the forklift pockets, tires, or cabinet. Verify any obstructions are clear of the forklift tines before lifting.




Figure 3-6. Lifting Points

008844

Section 4: Maintenance and Troubleshooting

AWARNING

Before servicing unit, shut unit down, turn water supply OFF, and disconnect unit from power source. Failure to do so could result in death, serious injury, or equipment damage.

(000586)

Daily Walk-Around Inspection

Perform a walk-around inspection of the unit every day before starting the unit. Look for conditions that could hinder performance or safety, such as (but not limited to) damaged or missing parts and hardware, and loose or broken electrical connections.



Equipment Damage. Failure to perform a daily inspection could result in damage to the unit.

(000306)

General Maintenance

Maintenance Activity	After First Operation	Before Each Use	Semi- Annually
Check all electrical connections		•	
Clean Inlet Filter			. •
Clean Nozzles			•

Poorly maintained equipment can become a safety hazard. In order for the equipment to operate safely and properly over a long period of time, periodic maintenance and occasional repairs are necessary. **DO NOT** perform routine service unless all electrical components are OFF.

Regular maintenance will improve performance and extend engine/equipment life. Generac Mobile Products LLC recommends all maintenance work be performed by a Generac Mobile Products Authorized Dealer (ASD).

Inspecting the Unit

- If the unit is stored outside, check for water inside the cabinet and control panel cover before each use. If wet, dry the unit thoroughly before starting.
- Inspect condition of electrical cords. DO NOT use the unit if insulation is cut or worn through.
- Verify the wheels and locking caster are present and in serviceable condition.

Preparing for Service

Before servicing the unit, always follow the instructions listed below.

- 1. Verify unit power switch is OFF.
- 2. Disconnect shore power from the unit.
- 3. Disconnect water supply from the unit.
- 4. Attach a DO NOT USE sign to the control panel. This will notify everyone that the unit is being serviced and will reduce the chance of someone inadvertently trying to start the unit.

Cleaning the Unit

See *Figure 4-1*. After each use, clean nozzles (A) with a water solution and antilimestone product.




Figure 4-1. Cleaning the Unit

Always clean the unit after each use to remove dust, grease, mud, or spilled fuel or oil. Use soft, clean rags to wipe the cabinet exterior and control panel. Low-pressure compressed air (less than 40 PSI [276 kPa]) can also be used to remove dust and debris from the cabinet interior.

This unit contains sensitive electronic components that can be damaged by high pressure, heat and moisture. Do not wash the unit with a high pressure hose or power washer. Water may enter the cabinet and collect in the control panel or other electrical parts, causing damage.

Inlet Filter Cleaning

- 1. Figure 4-2. Remove inlet filter plug (A).
- 2. Remove filter cartridge.
- **3.** Tap cartridge on a solid surface and blow with compressed air to remove sediment.
- 4. Install cartridge and replace inlet filter plug.

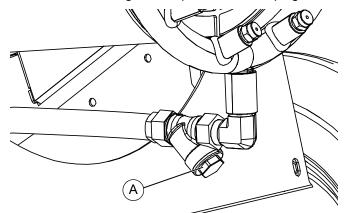


Figure 4-2. Cleaning Inlet Filter

Nozzle Cleaning

- 1. Remove nozzles from blower cone with a wrench.
- **2.** Soak nozzles in an antilimestone solution overnight.
- 3. Rinse nozzles.
- 4. Reinstall nozzles.




Figure 4-3. Cleaning Nozzles

General Troubleshooting

This information is intended to be a check or verification for simple causes that can be located and fixed. It does not cover all types of problems. See the engine operator's manual for additional troubleshooting information. Procedures that require in-depth knowledge or skills should be performed by an ASD.

Problem	Possible Cause	Solution
Fan Doesn't work	Plug not correctly connected	Verify plug is seated fully in socket.
Uneven water jet	Dirty or clogged nozzles	Clean nozzles. See Nozzle Cleaning .



www.discount-equipment.com

Part No. 10000024569 Rev. A 10/19/18 ©2018 Generac Power Systems, Inc.
All rights reserved
Specifications are subject to change without notice.
No reproduction allowed in any form without prior written consent from Generac Power Systems, Inc.

