

# Brush Mower



- ★ **Cut and mulch trees and saplings up to 3" in diameter**
- ★ **Steel frame for gearbox for positive alignment**
- ★ **Balanced stump jumper for smooth operation**

The EDGE rotary brush mower can cut through the thickest brush and glide over the roughest terrain. The brush mower is light, but built tough enough to handle demanding jobs such as cutting large fields, heavy weeds, undergrowth, brush and small saplings up to 3" (76 mm) in diameter. Use it to carve trails for horses, snowmobiles, cross-country skiing, or biking in areas that are usually inaccessible.

Standard features include 1/4" (6.3 mm) steel deck pans and bracing channel, and front and rear safety chains. The 1/2" (13 mm) steel frame for the gearbox and motor is welded to the frame and ensures positive alignment, and the balanced stump jumper means this brush mower will mow down almost anything in its path without stalling. Available for standard flow and high flow skid steers.

**ceattachmentsinc.**

**Every Attachment for EVERY Job.®**

phone: 1.866.232.8224

direct line: 1.262.387.1210

fax: 1.262.387.1247

web: [www.ceattach.com](http://www.ceattach.com)

# Brush Mower


## SPECIFICATIONS

# EDGE<sup>®</sup>

### FITS SKID STEER LOADERS

#### Features/Benefits:

- Balanced stump jumper for smooth operation
- 1/4" deck pans and bracing channel
- Front and rear safety chains
- Grade 2 shear pin protects complete drive line
- Includes hoses and flat-faced couplers

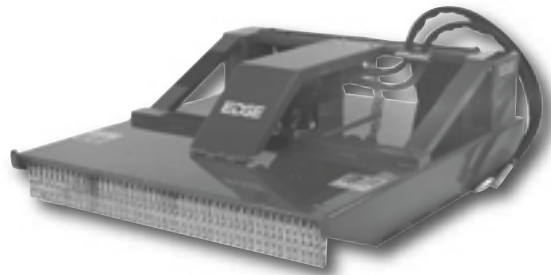

#### Options:

- Replacement Blade Sets
- Universal Door Kit
- Wheel Kit

#### Specifications:

Model	Weight	Cut Width	Hydraulic Flow
60S	875 lb (397 kg)	60" (1524 mm)	14-30 gpm (53-114 lpm)
66S	955 lb (433 kg)	66" (1676 mm)	14-30 gpm (53-114 lpm)
72S	1015 lb (460 kg)	72" (1828 mm)	14-30 gpm (53-114 lpm)
78S	1080 lb (490 kg)	78" (1981 mm)	14-30 gpm (53-114 lpm)
78H	1100 lb (499 kg)	78" (1981 mm)	30-40 gpm (114-151 lpm)


#### Complimentary Products



Angle Broom




Backhoe

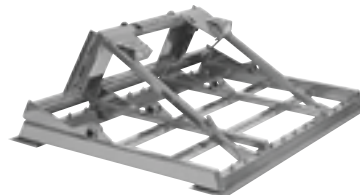

Land Leveler



Stump Grinder

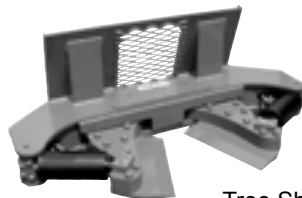

Tree Shears



Auger

## ceattachmentsinc.

### Every Attachment for EVERY Job.<sup>®</sup>

phone: 1.866.232.8224

direct line: 1.262.387.1210

fax: 1.262.387.1247

web: [www.ceattach.com](http://www.ceattach.com)

Spec #590734