

SPECIFICATIONS: 825TKL

Dimensions:	U.S.	Metric:
Weight (no attachment)	2,950 lbs	1,338 kg
Operating height, max	105.75"	2.68 m
Overall Length	106.5"	2.7 m
Width, with 7" tracks	35.5"	.90 m
Width, with 9" tracks	36.5"	.93 m
Ground clearance	7.25 in	184 mm
Tipping capacity	2,325 lb	1,054.6 kg
Rated operating capacity		
35% of tipping capacity	800 lb	362.88 kg
Angle of departure	28°	28°

Engine Options:

Kubota D1105 (HP: 25)	Kubota D1105	Kubota D1105
Fuel	Diesel	Diesel

Additional Specs:

Ground drive speed		
Forward	5.1 mph	7.2 kmh
Reverse	3.6 mph	5.8 kmh
Ground pressure*		
230 mm tracks	4.6 psi	.32 bar
180 mm tracks	5.9 psi	.41 bar



www.discount-equipment.com

825TKL MINI TRACK LOADER

DESIGN

The 825TKL Mini Track Loader features an innovative cab-over design, allowing exceptional access to key components, cutting routine maintenance time, and improving your bottom line. The articulating rollers on the track system tackle uneven terrain and absorb impact, providing stability and comfort to the operator. The universal attachment plate on the TKL allows for the use of any industry-standard quick-change attachment, providing value by eliminating the unnecessary cost of brand-specific attachments.



Electronic display panel and user-friendly controls

CONTROLS

The TKL experience incorporates an electronic display panel that is clear and easy to understand. Featuring a unique High/Medium/Low speed selection, the operator can adjust the track drive speed of the TKL to the task at hand, benefiting both seasoned and novice operators. There are a variety of safety features on the TKL, including the Operator Presence Switch that senses when the operator is no longer standing on the ride platform. The TKL is also equipped with innovative Tip Over Protection, utilizing the machine's incline sensor to shut off the fuel supply and lock the TKL in the event of a rollover situation. A 4-digit safety code is required to restart the TKL, preventing potential engine damage and giving the owner opportunity to inspect and secure the machine.



Cab-over design provides easy access to the engine, hydraulic pumps and components


LCD display serves as an important diagnostic tool providing vital information such as fuel level and engine temperature, and it activates or deactivates the hydraulics

Universal attachment plate

Lockout bar secures raised arm

Operator Presence Switch

Articulating rollers absorb impact and traverse smoothly over obstacles or uneven ground

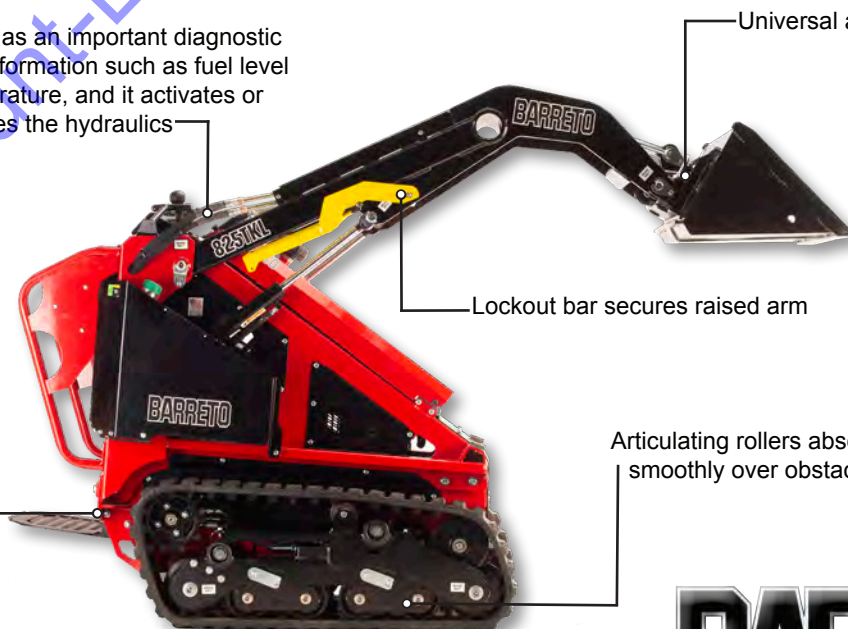

TO PURCHASE THIS PRODUCT PLEASE CONTACT US



**Equipment Financing and
Extended Warranties Available**



**Discount-Equipment.com is your online resource for
commercial and industrial quality parts and equipment sales.**

561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar