

400
cfm
@ 100 psi



Available with optional



PERFORMANCE //

- 1 - Digital Touch Screen Control
- 2 - Emergency Shut-off Button
- 3 - Quick Access Air Connections
- 4 - Direct Coupled Engine to Air
- 5 - QuieTech™ Sound Attenuation
- 6 - E2 Airflow Technology

MAINTENANCE //

- 7 - Large Gullwing Doors
- 8 - Curbside Filter Servicing
- 9 - Compressor Oil Access Door
- 10 - After Cooler Access Door
- 11 - Curbside Fuel Drain
- 12 - Exterior Service Drains
- 13 - Front SCR Access Panel

CONSTRUCTION //

- 14 - Stainless Steel Hardware
- 15 - Powder-coated Steel Enclosure
- 16 - Lockable Access Doors
- 17 - Automotive Door Seals
- 18 - 47 Gallon Fuel Tank
- 19 - Heavy-Duty Steel Tow Trailer



Kubota®
V3800
Tier 4 / CARB
Diesel Engine




1 | Digital Touch Screen Control with Start Button & Pressure Selector Switch



3 | Air Connections
3/4" Ball Valve x 2 | 2" Ball Valve x 1



12 | Exterior Service Drains
Quick drain valves for the Radiator, Oil Cooler and Engine Oil fluids

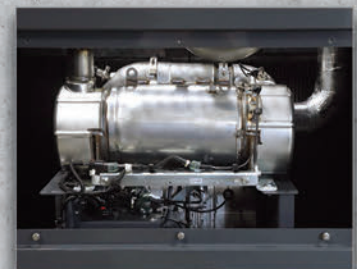

13 | Front-mounted SCR System
Convenient access for easy servicing

AIR COMPRESSOR MODEL PDS400S/SC-6E1 (AFTER COOLER)

RUN WITH AIRMAN®

AIR COMPRESSOR SPECIFICATIONS	PDS400S/SC-6E1
COMPRESSOR TYPE	Single-stage Oil Cooled, Screw Type
PRESSURE 400 CFM @ 100 PSI	
ACTUAL FREE AIR DELIVERY	400cfm
WORKING PRESSURE	100 psig
WORKING PRESSURE (MAXIMUM)	120 psig
WORKING PRESSURE (MINIMUM)	58 psig
COMPRESSOR LUBRICATING OIL CAP.	10.5 gal
COMPRESSOR LUBRICATING SYSTEM	Forced Lubrication by Compressed Air
DRIVING SYSTEM	Direct Drive w/Rubber Dampener Coupling
RECEIVER TANK CAPACITY	20.3 g/min
AIR SERVICE VALVES	3/4" Male Ball Valve x 2 2" Female Ball Valve x 1
SEPERATION FILTERS	Internal Oil Separator Filter
OIL COOLER TYPE	Air Pressurized Tube and Fin
COMPRESSOR OIL FILTER	Spin-on Cartridge Type
SOUND dBA RATING	76 dBA
ENGINE MAKE & MODEL	KUBOTA® V3800TIEF4B-COHE-1
ENGINE TYPE	4-cycle, Water Cooled, Direct Injection, Diesel
ASPIRATION	Turbocharged + Turbo After Cooler
NUMBER OF CYLINDERS	4
ENGINE DISPLACEMENT	230 cu in
HORSEPOWER RATING	104.5 HP / 77.9 kW
SAE BRAKE HORSEPOWER (@3000 RPM)	114.1 HP / 85.1 kW

ENGINE MAKE & MODEL (Continued)	KUBOTA® V3800TIEF4B-COHE-1
OPERATING SPEED (LOW IDLE)	1300 rpm
OPERATING SPEED (HIGH IDLE)	2600 rpm
EPATIER 4F CARB EMISSION CERTIFIED 2021	CARB Exec. Order U-R-025-0929 EPA Cert. No. MKBXL03.BAMD-055
EMISSIONS TIER	EPA Tier 4 Final
EMISSIONS TYPE	DOC, PTOX-DPF, ASC, SCR, EGR
FUEL TANK CAPACITY	47.0 gal
FUEL FILTER QUANTITY/TYPE	1 Pre-filter, 1 Sedimenter, 1 Fuel Filter
FUEL PUMP	Fuel Air-bleeding Electric Pumpw/Filter
DIESEL EXHAUST FLUID (DEF) CAPACITY	5.3 gal
DEF CONSUMPTION	0.12 gal/hr
ENGINE OIL CAPACITY	3.4 gal
COOLANT CAPACITY	4.12 gal
ELECTRICAL SYSTEM - VOLTAGE	12V, 90A Alternator
BATTERY RATING	695 CCA / 120 Ah
BATTERY GROUP	130F51, 12V
AMBIENT TEMPERATURE (MIN./MAX.)	5 °F to 104 °F, Humidity <80%
OPERATING ALTITUDE (MAXIMUM)	4,921 ft
RUNTIME (FULL LOAD / 70% LOAD)	8.5 hrs / 13.5 hrs
CONTAINMENT	No Fluid Containment
FUEL CONSUMPTION	
FULL LOAD	5.52 gal/hr
70% LOAD	3.48 gal/hr
NO LOAD	1.77 gal/hr

WEIGHTS & DIMENSIONS	
LENGTH x WIDTH x HEIGHT	103.5" x 57.3" x 47.6"
DRY WEIGHT / WITH AFTERCOOLER	3,737 lbs / 3,803 lbs
OPERATING WT./ WITH AFTERCOOLER	4,233 lbs / 4,299 lbs
LENGTH	103.5"
WIDTH	57.3"
HEIGHT	47.6"
TOWING PACKAGE	
LENGTH x WIDTH x HEIGHT	174" x 77.75" x 69"
LENGTH	174"
WIDTH	77.75"
HEIGHT	69"
OPERATING WEIGHT w/TOWING (GVWR)	4,653 lbs / 4,719 lbsw/After Cooler
TOWING SPEED (MAXIMUM)	65 mph - Conditions Permitting
TRACK WIDTH	68"
WHEEL SIZE - TIRE RATING	ST235/80R16E / 3,520 lbs@80 psi
NUMBER OF AXLES / RATING	1 Spring Axle / 5,300 lbs
BRAKING TYPE	Electric w/Breakaway Battery System
LIGHTING TYPE	LED
ADJUSTABLE HITCH HEIGHT	3-Position
COMPLIANCE & CERTIFICATIONS	
FLUID CONTAINMENT	No Fluid Containment
USA DOT COMPLIANT	Meets FMVSS
CSA LISTED	Not CSA Listed
TRANSPORT CANADA COMPLIANT	Transport Canada Compliant
DIESEL ENGINE EPA TIER LEVEL	Tier 4 Final & CARB Compliant

All specifications are subject to change without prior notice. Visit anacorp.com for the most current information.

OPTIONAL ACCESSORIES



Integrated After Cooler



Double Hose Reel Kit



Single Hose Reel Kit



Battery Charger



Engine Block Heater



Battery Blanket



Discount Equipment

www.discount-equipment.com



ANA

We make your world easier.

TO PURCHASE THIS PRODUCT PLEASE CONTACT US



**Equipment Financing and
Extended Warranties Available**



**Discount-Equipment.com is your online resource for
commercial and industrial quality parts and equipment sales.**

561-964-4949

visit us on line @ www.discount-equipment.com

Select an option below to find your Equipment

Search by Manufacturer

Search by Product Type

Request a Quote

We sell worldwide for the brands: Genie, Terex, JLG, MultiQuip, Mikasa, Essick, Whiteman, Mayco, Toro Stone, Diamond Products, Generac Magnum, Airman, Haulotte, Barreto, Power Blanket, Nifty Lift, Atlas Copco, Chicago Pneumatic, Allmand, Miller Curber, Skyjack, Lull, Skytrak, Tsurumi, Husquvarna Target, Stow, Wacker, Sakai, Mi-T-M, Sullair, Basic, Dynapac, MBW, Weber, Bartell, Bennar Newman, Haulotte, Ditch Runner, Menegotti, Morrison, Contec, Buddy, Crown, Edco, Wyco, Bomag, Laymor, EZ Trench, Bil-Jax, F.S. Curtis, Gehl Pavers, Heli, Honda, ICS/PowerGrit, IHI, Partner, Imer, Clipper, MMD, Koshin, Rice, CH&E, General Equipment, Amida, Coleman, NAC, Gradall, Square Shooter, Kent, Stanley, Tamco, Toku, Hatz, Kohler, Robin, Wisconsin, Northrock, Oztec, Toker TK, Rol-Air, APT, Wylie, Ingersoll Rand / Doosan, Innovatech, Con X, Ammann, Mecalac, Makinex, Smith Surface Prep, Small Line, Wanco, Yanmar