

ACCESSORIES




Tumbling Bars

- 540 or 1000 RPM operating speed
- Designed for agricultural machinery

Square D Transfer Switches

- 100 or 200 Amp
- 2-pole and 3-pole available



3-Point Hitch Kit

- Designed for 10kW-25kW models
- PTO shaft included
- Provides portability to get power to different locations





Splined Adapter

- Allows 25PTOC to couple with any standard 1 3/8" 6 spline shaft
- Required for 3-point hitch kit




PTO Trailer

- Off road trailers built specifically to handle the torque of our PTO generators
- Provides portability to get power to different locations

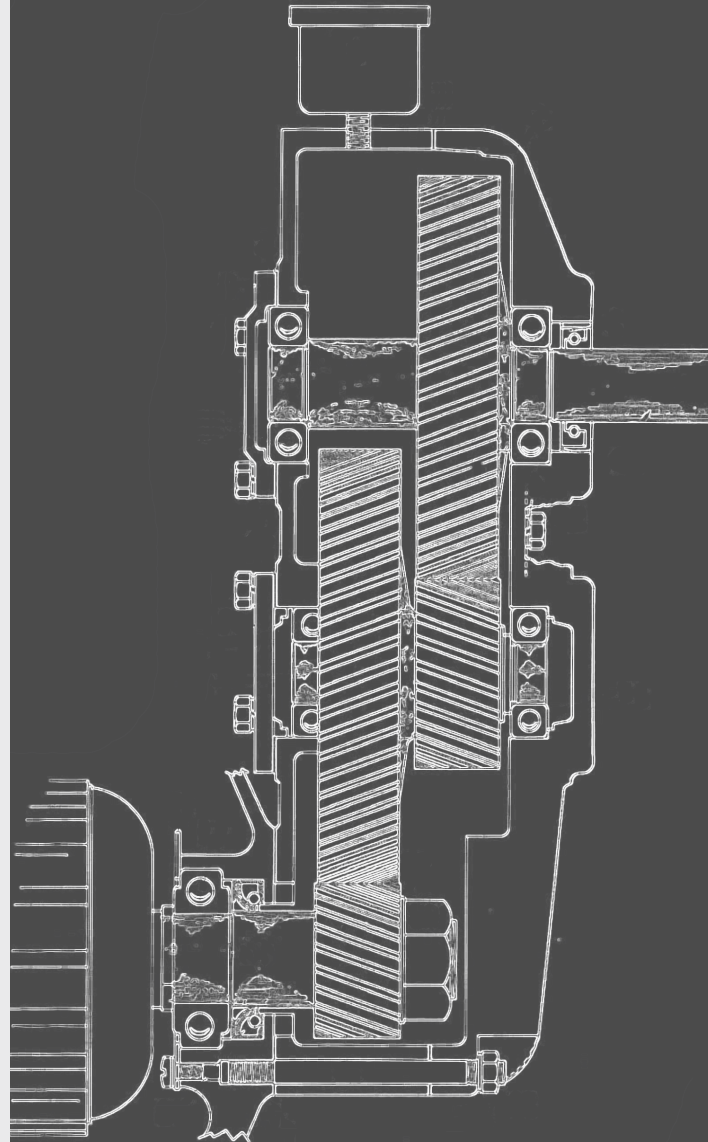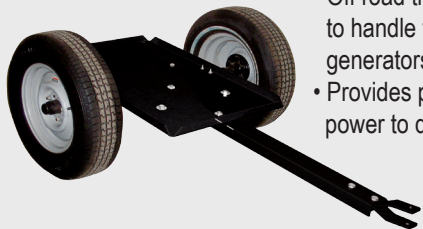

WINCO[®]

PTO GENERATORS

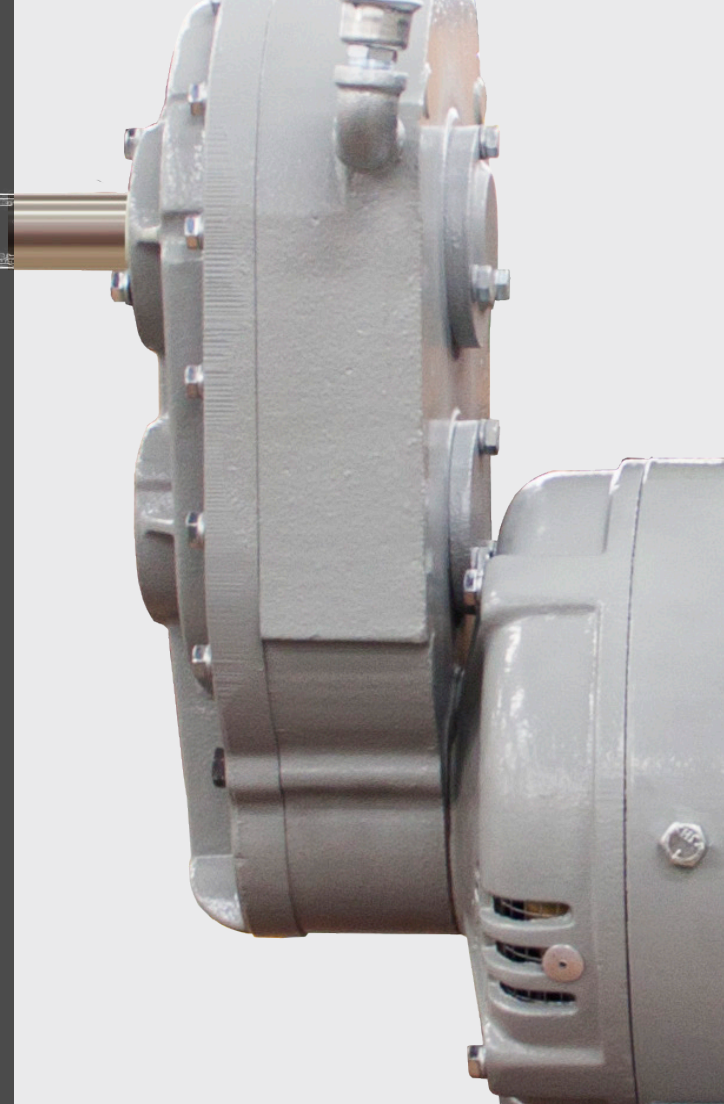


SINGLE AND THREE-PHASE

LARGEST PTO MANUFACTURER IN AMERICA

SINGLE PHASE MODELS

Model (120/240V)	kW	Amps (240V)	CB	Gen Speed RPM	Input Speed	Input HP
W10PTOS ⁽¹⁾	10	42	60A	3600	515	20
W15PTOS ⁽¹⁾	15	62	60A	3600	515	30
25PTOC	25	104	100A	3600	540 ⁽²⁾	50
35PTOC	35	146	150A	1800	540 ⁽²⁾	70
50PTOC	50	208	200A	1800	540 ⁽²⁾	100
W85FPTOS	85	354	350A	1800	1000	170
W100FPTOS	100	416	400A	1800	1000	200
W150FPTOS	150	625	600A	1800	1000	290

(1) 10kW and 15kW have a 1 year warranty. (2) Available with optional 1000 RPM gearcase

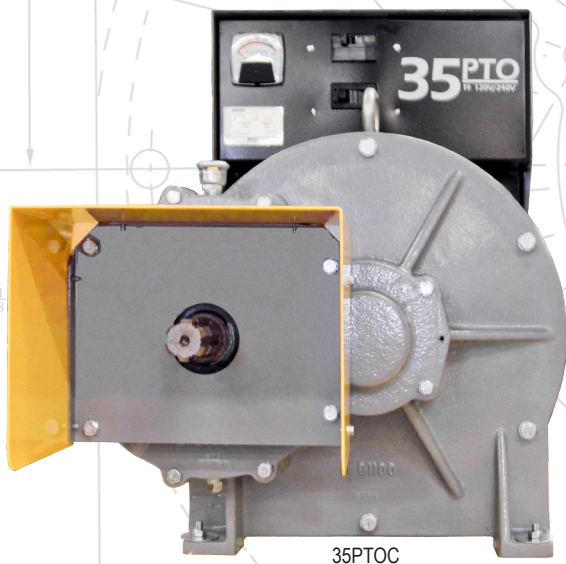

35PTOC

STANDARD FEATURES

Proven designs

100% copper windings

Helical gears for smooth operation

Square D mainline circuit breakers

Large voltmeter or frequency meter

Powder coat paint


Lifting eye

Rodent protection screen

3 year warranty



50PTOC shown on optional trailer

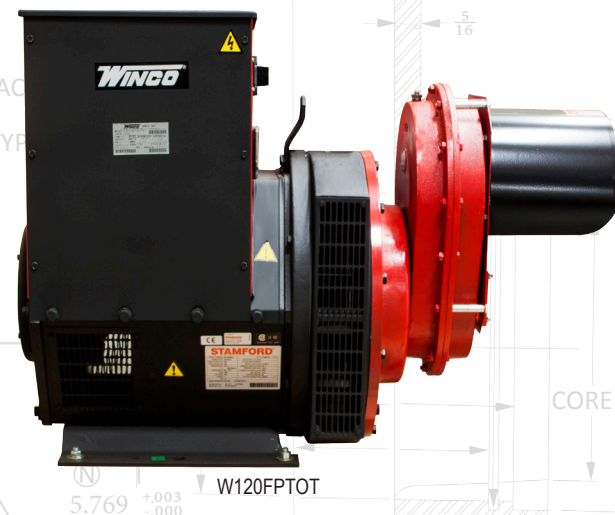

THREE PHASE MODELS

Model	kW	1.0 PF (AMPS)	0.8 PF (AMPS)	CB	Gen Speed RPM	Input Speed	Input HP
40PTOC-4	40	111	138	100A	1800	540 ⁽¹⁾	80
45PTOC-17	45	108	135	100A	1800	540 ⁽¹⁾	90
75FPTOC-4	75	208	260	200A	1800	1000	150
75FPTOC-17	75	180	225	200A	1800	1000	150
W105FPTOT-4	105	291	364	350A	1800	1000	210
W105FPTOT-17	105	253	315	300A	1800	1000	210
W120FPTOT-18	120	144	180	175A	1800	1000	240
W145FPTOT-4	145	402	503	500A	1800	1000	290
W145FPTOT-17	145	349	435	450A	1800	1000	290
W165FPTOT-18	165	198	248	250A	1800	1000	330

(1) Available with optional 1000 RPM gearcase

-4=120/208 3-PH, -17=120/240 3-PH, -18=277/480 3-PH

